



2018 Marvell Product Selector Guide

TOTAL SOLUTIONS FROM MARVELL

Providing a broad spectrum of solutions across a wide range of market segments.

TABLE OF CONTENTS

Embedded Processors	2
Microcontrollers	5
Storage	6
SOHO Switching	10
Switching	13
Transceivers	15
Wireless	23
About Marvell	24

ARMADA Series

Embedded Processors

Part Numbers
CPU Base Architecture
Ethernet
PCIe
USB
UART
SATA
Device Bus
Frequency
Cache
DDR Controller
Package Size
Package Type
Ball Pitch
I-Temp
Evaluation Board
Software

ARMADA 7K/8K																	
ARMADA 7020	88F7020	ARM [®] v8 Cortex A72 Dual Core	2x 1/2.5GBE 1x 10GbE	1x PCIe3.0 x4/x2/x1 2x PCIe3.0 x1	2x USB3/USB2	4x UART	2 x SATA3	8/16 bit Device bus	800MHz, 1.0GHz, 1.2GHz, 1.6GHz	L1: 32KB/32KB B L2: 1MB unified	32-bit ECC	17mm x 17mm	429L-FCBGA	0.65mm	Yes	DB-88F7040-A2	U-Boot, Linux, OpenWRT, Yocto
ARMADA 7040	88F7040	ARM [®] v8 Cortex A72 Quad Core	2x 1/2.5GBE 1x 10GbE	1x PCIe3.0 x4/x2/x1 2x PCIe3.0 x1	2x USB3/USB2	4x UART	2 x SATA3	8/16 bit Device bus	800MHz, 1.0GHz, 1.2GHz, 1.4GHz	L1: 32KB/32KB B L2: 1MB unified	32-bit ECC	17mm x 17mm	429L-FCBGA	0.65mm	Yes	DB-88F7040-A2	U-Boot, Linux, OpenWRT, Yocto
ARMADA 6040	88F6040	ARM [®] v8 Cortex A72 Quad Core	2x 1/2.5GBE 1x 10GbE	1x PCIe3.0 x4/x2/x1 2x PCIe3.0 x1	2x USB3/USB2	4x UART	2 x SATA3	8/16 bit Device bus	600MHz	L1: 32KB/32KB B L2: 1MB unified	32-bit ECC	17mm x 17mm	429L-FCBGA	0.65mm	Yes	DB-88F7040-A2	U-Boot, Linux, OpenWRT, Yocto
ARMADA 8020	88F8020	ARM [®] v8 Cortex A72 Dual Core	4x 1/2.5GBE 2x 10GbE	1x PCIe3.0 x4/x2/x1 1x PCIe3.0 x1 2x PCIe3.0 x1	3x USB3/USB2	4x UART	4 x SATA3	8/16 bit Device bus	1.0GHz, 1.2GHz, 1.6GHz, 2.0GHz	L1: 32KB/32KB B L2: 1MB unified	32/64-bit ECC	24mm x 24mm	816 - FCBGA	0.8mm	Yes	DB-88F8040-A2	U-Boot, Linux, OpenWRT, Yocto
ARMADA 8040	88F8040	ARM [®] v8 Cortex A72 Quad Core	4x 1/2.5GBE 2x 10GbE	1x PCIe3.0 x4/x2/x1 1x PCIe3.0 x1 2x PCIe3.0 x1	3x USB3/USB2	4x UART	4 x SATA3	8/16 bit Device bus	1.0GHz, 1.2GHz, 1.6GHz, 2.0GHz	L1: 32KB/32KB B L2: 1MB unified	32/64-bit ECC	24mm x 24mm	816 - FCBGA	0.8mm	Yes	DB-88F8040-A2	U-Boot, Linux, OpenWRT, Yocto
ARMADA XP																	
MV78230	MV78230	ARM [®] v7 Dual Core	3 x GbE	2 x PCIe 2.0 2 x PCIe 2.0 (1 x4 or 4 x1 and 1 x1)	3 x USB2	4 x UART	2 x SATA2	8/16 bit Device bus	1.06GHz, 1.2GHz, 1.33GHz, 1.6GHz	L1: 32KB-I, 32KB-D; L2: 1MB unified	32bit ECC DDR3/L-1600 with ECC	23mm x 23mm	732-FCBGA	0.65mm		DB-MV784MP-GP	u-boot, Linux, vxWorks and others
MV78260	MV78260	ARM [®] v7 Dual Core	4 x GbE	3 x PCIe 2.0 (2 x4 or 4 x1, 1 x4 /x1)	3 x USB2	4 x UART	2 x SATA2	8/16/3 2 bit Device bus	1.06GHz, 1.2GHz, 1.33GHz, 1.6GHz	L1: 32KB-I, 32KB-D; L2: 1MB unified	32/64bit ECC DDR3/L-1600 with ECC	23mm x 23mm	732-FCBGA	0.65mm		DB-MV784MP-GP	u-boot, Linux, vxWorks and others

ARMADA Series

Embedded Processors

Part Numbers CPU Base Architecture Ethernet PCIe USB UART SATA Device Bus Frequency Cache DDR Controller Package Size Package Type Ball Pitch I-Temp Evaluation Board Software

MV78460	MV78460	ARM®v7 Quad Core	4 x GbE	4 x PCIe 2.0 (2 x4 or 4 x1 and 2x4/x1)	3 x USB2	4 x UART	2 x SATA2	8/16/32 bit Device bus	1.2GHz, 1.33GHz, 1.6GHz	Cache	L1: 32KB-I, 32KB-D; L2: 2MB unified	32/64bit ECC DDR3/L-1600 with ECC	23mm x 23mm	732-FCBGA	0.65mm		DB-MV784MP-GP	u-boot, Linux, vxWorks and others
---------	---------	------------------	---------	--	----------	----------	-----------	------------------------	-------------------------	-------	-------------------------------------	-----------------------------------	-------------	-----------	--------	--	---------------	-----------------------------------

ARMADA 38x

ARMADA 380	88F6810	ARM®v7 Cortex A9 Single Core with NEON	2 x 1/2.5GbE	3 x PCIe 2.0 x1	2 x USB3/USB2 and 1 x USB2	2x UART	2 x SATA3	8/16 bit Device bus	1.0GHz, 1.33GHz, 1.6GHz		L1: 32KB/32KB L2: 512MB unified	16-bit, ECC DDR3/L-1600 and DDR4-1800	17x17mm	372-TFBGA	0.8mm	Yes	DB-88F6820-GP-AO; DB-88F6820-AP-AO	U-Boot, Linux, OpenWRT, Yocto, FreeBSD
------------	---------	--	--------------	-----------------	----------------------------	---------	-----------	---------------------	-------------------------	--	---------------------------------	---------------------------------------	---------	-----------	-------	-----	------------------------------------	--

ARMADA 381	88F6811	ARM®v7 Cortex A9 Single Core with NEON	1 x 1/2.5GbE	3 x PCIe 2.0 x1	1 x USB3/USB2 and 1 x USB2	2x UART	2 x SATA3	8/16 bit Device bus	1.0GHz, 1.33GHz		L1: 32KB/32KB L2: 1MB unified	16-bit, ECC DDR3/L-1333	14x14mm	298-TFBGA	0.65mm	No	DB-88F6821-BP-AO	U-Boot, Linux, OpenWRT, Yocto, FreeBSD
------------	---------	--	--------------	-----------------	----------------------------	---------	-----------	---------------------	-----------------	--	-------------------------------	-------------------------	---------	-----------	--------	----	------------------	--

ARMADA 382	88F6821	ARM®v7 Cortex A9 Dual Core with NEON	1 x 1/2.5GbE	3 x PCIe 2.0 x1	1 x USB3/USB2 and 1 x USB2	2x UART	2 x SATA3	8/16 bit Device bus	1.0GHz, 1.33GHz		L1: 32KB/32KB L2: 1MB unified	16-bit, ECC DDR3/L-1333	14x14mm	298-TFBGA	0.65mm	No	DB-88F6821-BP-AO	U-Boot, Linux, OpenWRT, Yocto, FreeBSD
------------	---------	--------------------------------------	--------------	-----------------	----------------------------	---------	-----------	---------------------	-----------------	--	-------------------------------	-------------------------	---------	-----------	--------	----	------------------	--

ARMADA 385	88F6820	ARM®v7 Cortex A9 Dual Core with NEON	3 x 1/2.5GbE	4 x PCIe 2.0 x1 or 1 x4	2 x USB3/USB2 and 1 x USB2	2x UART	2 x SATA3	8/16 bit Device bus	1.0GHz, 1.33GHz, 1.6GHz, 1.8GHz, 2.0GHz		L1: 32KB/32KB L2: 1MB unified	16/32-bit, ECC DDR3/L-1600 and DDR4-1800	17x17mm	372-TFBGA	0.8mm	Yes	DB-88F6820-GP-AO; DB-88F6820-AP-AO	U-Boot, Linux, OpenWRT, Yocto, FreeBSD
------------	---------	--------------------------------------	--------------	-------------------------	----------------------------	---------	-----------	---------------------	---	--	-------------------------------	--	---------	-----------	-------	-----	------------------------------------	--

ARMADA 388	88F6828	ARM®v7 Cortex A9 Dual Core with NEON	3 x 1/2.5GbE	4 x PCIe 2.0 x1 or 1 x4	2 x USB3/USB2 and 1 x USB2	2x UART	4 x SATA3	8/16 bit Device bus	1.0GHz, 1.33GHz, 1.6GHz, 1.8GHz, 2.0GHz		L1: 32KB/32KB L2: 1MB unified	16/32-bit, ECC DDR3/L-1600 and DDR4-1800	17x17mm	372-TFBGA	0.8mm	Yes	DB-88F6820-GP-AO	U-Boot, Linux, OpenWRT, Yocto, FreeBSD
------------	---------	--------------------------------------	--------------	-------------------------	----------------------------	---------	-----------	---------------------	---	--	-------------------------------	--	---------	-----------	-------	-----	------------------	--

ARMADA 375

ARMADA Series

Embedded Processors

Part Numbers CPU Base Architecture Ethernet PCIe USB UART SATA Device Bus Frequency Cache DDR Controller Package Size Package Type Ball Pitch I-Temp Evaluation Board Software

88F6720	88F6720	ARM®v7 Cortex A9 Dual Core with NEON	2 x GbE	2 x PCIe 2.0 x1	1 x USB3/USB2 and 1 x USB2	2x UART	2 x SATA2	8/16 bit Device bus	800MHz, 1.0GHz	L1: 32KB-I, 32KB-D; L2: 256KB unified	16/32-bit, DDR3/L-1066	19mm x 19mm	511-TFBGA	0.65mm	Yes	DB-88F6720-A0	u-boot, Linux
ARMADA LP																	
88F3710	88F3710	ARM®v8 Cortex A53 Single Core with NEON	2 x 1/2.5GbE	1 x PCIe 2.0 x1	1 x USB3/USB2 and 1 x USB2	1x UART	1 x SATA3	None	800MHz, 1.0GHz and 1.2GHz	L1: 32KB-I, 32KB-D; L2: 256KB unified	16 bit DDR3/3L/4	10.5mm x 11.5mm	271L TFBGA	0.5mm	Yes	DB-88F3720-DDR3-1; DB-88F3720-DDR4-4GB	u-boot, Linux
88F3720	88F3720	ARM®v8 Cortex A53 Dual Core with NEON	2 x 1/2.5GbE	1 x PCIe 2.0 x1	1 x USB3/USB2 and 1 x USB2	1x UART	1 x SATA3	None	800MHz, 1.0GHz and 1.2GHz	L1: 32KB-I, 32KB-D; L2: 256KB unified	16 bit DDR3/3L/4	10.5mm x 11.5mm	271L TFBGA	0.5mm	Yes	DB-88F3720-DDR3-1; DB-88F3720-DDR4-4GB	u-boot, Linux

EZ Connect

Microcontrollers

	Processor	Frequency	Connectivity	Memory	execute-In-Place	Security	DMA	Clock	Timers	Digital Interfaces	Analog	GPIOs	Debug	Package
88MW300 Microcontroller with Wi-Fi connectivity	ARM Cortex-M4F with MPU	200 MHz	802.11 b/g/n 1x1	ROM: 128KB, SRAM: 512KB, Always-On SRAM: 4KB	Yes	Secure Boot, AES engine, WLAN TKIP/AES	32x channels	On-chip RTC	2x GPT with LED PWM, Watch Dog	I2C (2x), UART (3x), SSP/SPI (3x), I2S (3x), QSPI (with 32KB Flash-cache)	ADC, DAC, Analog Comparator	Up to 35	JTAG/SWD	68-pin QFN 8x8 mm
88MW302 Microcontroller with Wi-Fi connectivity	ARM Cortex-M4F with MPU	200 MHz	802.11 b/g/n 1x1	ROM: 128KB, SRAM: 512KB, Always-On SRAM: 4KB	Yes	Secure Boot, AES engine, WLAN TKIP/AES	32x channels	RTC	4x GPT with LED PWM, Watch Dog	I2C (2x), UART (3x), SSP/SPI (3x), I2S (3x), QSPI (with 32KB Flash-cache), USB OTG	ADC, DAC, Analog Comparator	Up to 50	JTAG/SWD	88-pin QFN 10x10 mm
88MB300 Microcontroller with BT/BLE	ARM Cortex-M3 with MPU	128 MHz	Bluetooth 4.2, BDR/EDR BLE	ROM: 320KB, SRAM: 512KB	No	Bluetooth AES	6x channels	RTC	2x GPT, Watch Dog	I2C (2x), UART (2x), SSP/SPI (2x), I2S/PCM (2x), QSPI 16x16 Keyscan controller, Touch-button module, Trackball controller	ADC, DAC, Analog Comparator	Up to 32	JTAG/SWD	48-pin QFN, 69-bump eWLP

SATA Storage Controllers

Storage Switching

Part Numbers
Port Count
Bus Type
Queuing
Port Multiplier Support
Flash
Marvell Firmware
Power
Package Size
Package Type
I-Temp
Ball Pitch
Evaluation Board Part

88SE9345 PCIe 2.0x4 to 4 SATA 6Gb/s Ports Without RAID	88SE9345	4S	PCI-Express 2.0x4	Tag and Native Command	Yes	Flash BIOS I/F	N/A	-5W	19mm x 19mm	481-TFBGA	No	0.8mm	EV1-88SE9345
88SE9230 PCIe 2.0x2 to 4 SATA 6Gb/s Ports RAID Controller	88SE9230	4S	PCI-Express 2.0x2	Tag and Native Command	FIS-Based	Flash BIOS I/F	HW RAID 0/1	1w	9mm x 9mm	76-QFN	No	0.4mm	EV1-88SE9230
88SE9235 PCIe 2.0x2 to 4 SATA 6Gb/s Ports Without RAID	88SE9235	4S	PCI-Express 2.0x2	Tag and Native Command	FIS-Based	Flash BIOS I/F	N/A	1w	9mm x 9mm	76-QFN	No	0.4mm	EV1-88SE9235
88SE9215 PCIe 2.0x1 to 4 SATA 6Gb/s Ports Without RAID	88SE9215	4S	PCI-Express 2.0x1	Tag and Native Command	FIS-Based	Flash BIOS I/F	N/A	1w	9mm x 9mm	76-QFN	No	0.4mm	EV1-88SE9215
88SE9170 PCIe 2.0x1 to 2 SATA 6Gb/s Ports Without RAID	88SE9170	2S	PCI Express 2.0 x1	Tag and Native Command	FIS-Based	Flash BIOS I/F	N/A	0.8w	7mm x 7mm	56-QFN	Yes	0.4mm	EV1-88SE9170
88SE9182 PCIe 2.0x2 to 2 SATA 6Gb/s Ports Without RAID	88SE9182	2S	PCI-Express 2.0x2	Tag and Native Command	FIS-Based	Flash BIOS I/F	N/A	0.8w	7mm x 7mm	56-QFN	Yes	0.4mm	EV1-88SE9182
88SE9130 PCIe 2.0x1 to 2 SATA 6Gb/s Ports RAID controller	88SE9130	2S	PCI-Express 2.0 x1	Tag and Native Command	FIS-Based	Flash BIOS I/F	HW RAID 0/1	1W	9mm x 9mm	76-QFN	No	0.4mm	EV1-88SE9130
88SE9128 PCIe 2.0x1 to 2 SATA 6Gb/s Ports (1 PATA Port) RAID controller	88SE9128	2S 1P	PCI-Express 2.0 x1	Tag and Native Command	FIS-Based	Flash BIOS I/F	HW RAID 0/1	1W	9mm x 9mm	76-QFN	No	0.4mm	EV1-88SE9128
88SE9120 PCIe 2.0x1 to 2 SATA 6Gb/s Ports (1 PATA Port) Without RAID	88SE9120	2S 1P	PCI-Express 2.0 x1	Tag and Native Command	FIS-Based	Flash BIOS I/F	N/A	1W	9mm x 9mm	76-QFN	Yes	0.4mm	EV1-88SE9120
88SE9125 PCIe 2.0x1 to 2 SATA 6Gb/s Ports Without RAID	88SE9125	2S	PCI-Express 2.0 x1	Tag and Native Command	FIS-Based	Flash BIOS I/F	N/A	1W	9mm x 9mm	76-QFN	Yes	0.4mm	EV1-88SE9125

SATA Storage Controllers

Storage Switching

Part Numbers	Port Count	Bus Type	Queueing	Port Multiplier Support	Flash	Marvell Firmware	Power	Package Size	Package Type	I-Temp	Ball Pitch	Evaluation Board Part Number	
88SE1475 PCIe 3.0x8 to 16 SATA 6Gb/s Ports Without RAID	88SE1475	16S	PCI-Express 3.0 x8	Tag and Native Command	FIS-Based	Flash BIOS I/F	N/A	9W	21mm x 21mm	625 HFCBGA	No	0.8mm	EV1-88SE1475
88SE9171 PCIe 2.0x1 to 1 SATA 6Gb/s Port	88SE9171	1S	PCI-Express 2.0x1	Tag and Native Command	FIS-Based	Flash BIOS I/F	N/A	0.8w	7mm x 7mm	56-QFN	Yes	0.4mm	EV1-88SE9171

SAS/SATA Storage Controllers

Storage Switching

Part Numbers	Port Count	Bus Type	Queueing	SAS Expander Support	Flash	Target Mode	Marvell RAID Software	Power	Package Size	Package Type	I-Temp	Ball Pitch	Evaluation Board Part Number
88RC9580 PCIe 2.0x8 to 8 SAS/SATA 6Gb/s Ports RAID Controller	88RC9580	8	PCI-Express 2.0 x8	Tag and Native Command	Yes	Flash BIOS I/F	Yes	N/A	-8W	27mm x 27mm	676-FCBGA	1.0mm	DB1-88RC9580
88SE9485 PCIe 2.0 x8 to 8 SAS/SATA 6Gb/s Ports I/O Controller	88SE9485	8	PCI-Express 2.0 x8	Tag and Native Command	Yes	Flash BIOS I/F	No	N/A	-6W	23mm x 23mm	484-HSBGA	1.0mm	HA2VA6800m-RC1Vxx
88SE9445 PCIe 2.0 x4 to 4 SAS/SATA 6Gb/s Ports I/O Controller	88SE9445	4	PCI-Express 2.0 x4	Tag and Native Command	Yes	Flash BIOS I/F	Yes	N/A	-5W	19mm x 19mm	481-TFBGA	0.8mm	EV1-88SE9445
88SE1495 PCIe 3.0x8 to 16 Ports 12Gb/s SAS or 6Gb/s SATA Without RAID	88SE1495	16	PCI-Express 3.0 x8	Tag and Native Command	Yes	Flash BIOS I/F	Yes	N/A	9.5W	21mm x 21mm	625 HFCBGA	0.8mm	EV1-88SE1485
88SE1485 PCIe 3.0x8 to 8 Ports 12Gb/s SAS or 6Gb/s SATA Without RAID	88SE1485	8	PCI-Express 3.0 x8	Tag and Native Command	Yes	Flash BIOS I/F	Yes	N/A	7.5W	21mm x 21mm	625 HFCBGA	0.8mm	EV1-88SE1485

SATA Port Multiplier/Multiplexer

Storage Switching

88SM9715 1 Port to 5 Port 6Gb/s SATA Port Multiplier With Enclosure Management
88SM9705 1 Port to 5 Port 6Gb/s SATA Port Multiplier
88SM9602 1 Port to 2 Port 6Gb/s SATA Port
88SM4140 1:4 Serial ATA 3Gb/s Port Multiplier

Part Numbers	Port Count	Data Rate	Power	Package Size	Package Type	I-Temp	Evaluation Board Part Number
88SM9715	6	SATA 6Gb/s	0.88W	10mm x 10mm	84-QFN	Yes	EVI-88SM9715
88SM9705	6	SATA 6Gb/s	0.88W	10mm x 10mm	84-QFN	Yes	EVI-88SM9705
88SM9602	3	SATA 6Gb/s	0.50W	6mm x 6mm	48-MQFN		EVI-88SM9602
88SM4140	5	SATA 3Gb/s	1.6W	12mm x 12mm	80-LQFP		DB1-88SM4140C1-8087

SATA Bridge

Storage Switching

88SA8052 SATA/PATA Bridge

Part Numbers	Port Count	Data Rate	Power	Package Size	Package Type	I-Temp	Evaluation Board Part Number
88SA8052	Host or Device	SATA 3Gb/s to PATA 133	0.25W	9mm x 9mm	64-QFN	Yes (QFN)	DB-88SA8052-D, DB-88SA8052-H

SAS to SATA Protocol Converter

Storage Switching

Part Number SAS Port SATA port Data Rate Internal Flash Power Package Size Package Type I-Temp Evaluation Board Part Number

88SF9210 6Gb/s SAS to SATA Protocol Converter	88SF9210	2	2	SAS/SATA 6.0 Gb/s	N/A	1.35W	10mm x 10mm	84-QFN		DB1-88SF9210
88SF9110 6Gb/s SAS to SATA Protocol Converter	88SF9110	2	1	SAS/SATA 6.0 Gb/s	N/A	1.20W	10mm x 10mm	84-QFN		DB1-88SF9110

Link Street® - Fast Ethernet Switches

SOHO Switching	Port Configuration	Number of Ports	USXGMII / XFI	2.5G	Number of (R)XAUI	SGMII / 100Base X	GMI	RGMI	MII	RMII	100Base T	100Base T	100Base FX
88E6020 4-Port FE Switch	2 PHYs 2 MII/RMII	4	0	0	0	0	0	1	2	2	2	0	1
88E6070 5-Port FE Switch	5 PHYs	5	0	0	0	0	0	0	0	0	5	0	1
88E6071 5-Port FE Switch	5 PHYs 2 RMII (or 1 MII/RGMII)	7	0	0	0	0	0	2	1	2	5	0	1
88E6085 10-Port FE Switch	8 PHYs 2 MII	10	0	0	0	0	0	0	2	0	8	0	0
88E6065/B 6-Port FE Switch	5 PHYs 1 MII or 4 PHYs 2 MII	6	0	0	0	0	0	0	2	2	5	0	2

Link Street® - Fast Gigabit Ethernet Switches

SOHO Switching	Port Configuration	Number of Ports	USXGMII / XFI	2.5G	Number of (R)XAUI	SGMII / 100Base X	GMI	RGMI	MII	RMII	100Base T	100Base T	100Base FX
88E6046 6-Port FE+GE Switch	4 FE PHYs GMII/RGMII/SGMII	6	0	0	0	2	1	0	2	0	4	0	0

Link Street® - Fast Gigabit Ethernet Switches

SOHO Switching

Port Configuration	Number of Ports	USXGMII / XFI	2.5G	Number of (R)XAUI	SGMII / 100Base-X	GMII	RGMII	MII	RMII	100Base-T	100Base-T	100Base-FX	
88E6240 7-Port FE+GE Switch	4 FE PHYs 1 GE PHY 1 SerDes 1 RGMII/MII/RMII 1 GMII/RGMII/MII/RMII	7	0	0	0	1	1	2	2	2	5	1	1
88E6097 11-Port FE+GE Switch	8 FE PHYs GMII/RGMII/SGMII	11	0	0	0	3	1	1	2	0	8	0	0
88E6097F 11-Port FE+GE Switch	8 FE PHYs GMII/RGMII/SGMII	11	0	0	0	3	2	1	2	0	8	0	8
88E6290 11-Port AVB FE+GE Switch	8 FE PHYs 1 RGMII/MII/RMII 2 2.5G SerDes/SGMII	11	0	2	0	2	0	1	1	1	8	0	0

Link Street® - Gigabit Ethernet Switches

SOHO Switching

Port Configuration	Number of Ports	USXGMII / XFI	2.5G	Number of (R)XAUI	SGMII / 100Base-X	GMII	RGMII	MII	RMII	100Base-T	100Base-T	100Base-FX	
88E6341 6-Port AVB GE Switch	4 GE PHYs 1 RGMII/MII/RMII 1 2.5G/1G SERDES	6	0	1	0	1	0	1	1	1	4	4	0
88E6155 6-Port GE Switch	6 SerDes or 5 SerDes 1 GMII	6	0	0	0	6	1	0	1	0	0	0	0

Link Street® - Gigabit Ethernet Switches

SOHO Switching

Port Configuration	Number of Ports	USXGMII / XFI	2.5G	Number of (R)XAUI	SGMII / 100Base X	GMII	RGMII	MII	RMII	100Base T	100Base T	100Base FX	
88E6352 7-Port AVB GE Switch	5 GE PHYs 1 SerDes 1 RGMII/MII/RMII 1 GMII/RGMII/MII/RMII	7	0	0	0	1	1	2	2	2	5	5	1
88E6321 7-Port AVB GE Switch	2 GE PHYs 3 RGMII/MII/RGMII 2 SerDes/SGMII	7	0	0	0	2	1	3	3	3	2	2	2
88E6185 10-Port GE Switch	10 SerDes or 9 SerDes 1 GMII	10	0	0	0	10	1	0	1	0	0	0	0
88E6390 11-Port AVB GE Switch, 8 GE PHYs + 1 RGMII/MII/RMII + 2 2.5G SerDes/SGMII	8 GE PHYs 1 RGMII/MII/RMII 2 2.5G SerDes/SGMII	11	0	2	0	2	0	1	1	1	8	8	0
88E6122 6-Port GE Switch	2 GE PHYs 3 SerDes 1 GMII	6	0	0	0	3	1	0	1	0	2	2	3
88E6131 8-Port GE Switch	3 GE PHYs 4 SerDes 1 GMII	8	0	0	0	4	1	0	1	0	3	3	4

Link Street® - Gigabit 10G Ethernet Switches

SOHO Switching

Port Configuration	Number of Ports	USXGMII / XFI	5G SerDes	2.5G	Number of (R)XAUI	SGMII / 100Base X	GMII	RGMII	MII	RMII	100Base T	100Base T	100Base FX	
88E6390X 11-Port AVB GE+10G Switch	8 GE PHYs 1 RGMII/MII/RMII 2 XAUI/RXAUI	11	0		2	2	8	0	1	1	1	8	8	0

Presteria DX

Switching

Part Numbers
 Port Configuration
 Type
 Evaluation Boards
 Number of Ports
 Package Size
 Package Type
 I-Temp

DX Series

<p>Presteria-DX107 10-Port Gigabit Ethernet Packet Processor</p>	98DX107-xx-LKJ	10 SGMII	Layer 2/3	DB-DX107-10G, RD-DX107-48F4G	10	14mm x 20mm	128-LQFP	Yes
<p>Presteria-DX160 16-Port Gigabit Ethernet Packet Processor</p>	98DX160-xx	16 SGMII	Layer 2	RD-DX240-24G	16	31mm x 31mm	458-HSBGA	
<p>Presteria-DX167 16-Port Gigabit Ethernet Packet Processor</p>	98DX167-xx	16 SGMII	Layer 2/3	RD-DX247-24G	16	31mm x 31mm	458-HSBGA	Yes
<p>Presteria-DX240 24-Port Gigabit Ethernet Packet Processor</p>	98DX240-xx	24 SGMII	Layer 2	RD-DX240-24G	24	31mm x 31mm	458-HSBGA	
<p>Presteria-DX249 24-Port Gigabit Ethernet with 2 HX Ports Packet Processor</p>	98DX249-xx	24 SGMII, 2 HX	Layer 2	DB-DX249-24G-2HX	26	31mm x 31mm	480-HSBGA	
<p>Presteria-DX253 24-Port Gigabit Ethernet Packet Processor</p>	98DX253-xx	24 SGMII	Layer 2/3	DB-DX273-24G3XG, RD-DX273-48G2XG	24	37.5mm x 37.5mm	788-HSBGA	Yes
<p>Presteria-DX269 24-Port Gigabit Ethernet with 2 HX/HGS Ports Packet Processor</p>	98DX269-xx	24 SGMII, 3 HX/XAUI	Layer 2	DB-DX269-24G-2HX-IB	27	37.5mm x 37.5mm	788-HSBGA	
<p>Presteria-DX273 24-Port Gigabit Ethernet with 3 HGS Ports Packet Processor</p>	98DX273-xx	24 SGMII, 3 XAUI	Layer 2/3	DB-DX273-24G3XG, RD-DX273-48G2XG	27	37.5mm x 37.5mm	788-HSBGA	
<p>Presteria-DX5128 24-Port Gigabit Ethernet with 4 10GE Ports Packet Processor</p>	98DX5128-xx	24 SGMII, 4 XAUI	Layer 3	DB-DX3-6XG-4HGS, RD-DX3-48GE-4HGS	28	35mm x 35mm	1138-FCBGA	-

Presteria DX

Switching

Part Numbers
 Port Configuration
 Type
 Evaluation Boards
 Number of Ports
 Package Size
 Package Type
 I-Temp

<p>Presteria-DX8110 10-Port 10Gigabit Ethernet Packet Processor</p>	98DX8110-xx	10 XAUI	Layer 3	DB-DX3-6XG-4HGS, RD-DX3-48GE-4HGS	10	35mm x 35mm	1138-FCBGA	
<p>Presteria-DXx24 24-Port Gigabit Ethernet Packet Processor</p>	98DX324-A0-LKJ2C000, 98DX224-A0-LKJ2C000	6 QSGMII	Layer 2	RD-DX-24G-A RD-DX-22GE2C-A	24	14mm x 20mm	LQFP	No
<p>Presteria-DXx16 16-Port Gigabit Ethernet Packet Processor</p>	98DX316-A0-LKJ2C000, 98DX216-A0-LKJ2C000	4 QSGMII	Layer 2	RD-DX-16UNM	16	14mm x 20mm	LQFP	No
<p>Presteria-DXx08 8-Port Gigabit Ethernet Packet Processor</p>	98DX308-A0-LKJ2C000, 98DX208-A0-LKJ2C000	2 QSGMII	Layer 2	RD-DX-8G-A	8	14mm x 20mm	LQFP	No

Alaska C Ethernet

Transceivers

Number of Ports, Optical (Line), MACSec (LinkCrypt), 1-Temp, 1-Step PTP (1588 v2), 2-Step PTP, SyncE, Supported Speeds, Host Interfaces, Optical Interface, Optical Module Types, Direct Attach Copper, Energy Efficient Ethernet, Core Voltage, Digital I/O, Analog Voltage, Reference Clock, JTAG, Package Type

Alaska C 88X5113

1	Yes	No	Yes	No	No	Yes	100G, 50G, 25G, 10G, 1G	CAUI-4, 25G, 10G, 1G, XLAUI, XFI	100G, 40G, 25G, 10G, 1G	BASE-R, 100G, 40G, 25G, 10G, 1G	Yes	No	0.9V (C-temp), 0.9V (I-temp)	1.0V	1.0V	1.0V	156.25 MHz	Yes	169-FCBGA
---	-----	----	-----	----	----	-----	-------------------------	----------------------------------	-------------------------	---------------------------------	-----	----	------------------------------	------	------	------	------------	-----	-----------

Alaska C 88X5123

2	Yes	No	Yes	No	No	Yes	100G, 50G, 25G, 10G, 1G	CAUI-4, 25G, 10G, 1G, XLAUI, XFI	100G, 40G, 25G, 10G, 1G	BASE-R, 100G, 40G, 25G, 10G, 1G	Yes	No	1.0V	1.0V	1.0V	156.25 MHz	Yes	256-HFCBGA
---	-----	----	-----	----	----	-----	-------------------------	----------------------------------	-------------------------	---------------------------------	-----	----	------	------	------	------------	-----	------------

Alaska M Multi-Gigabit Ethernet

Transceivers

Number of Ports, Optical (Line), MACSec (LinkCrypt), 1-Temp, 1-Step PTP (1588 v2), 2-Step PTP, SyncE, BASE-T Speeds (Copper), Host Interfaces, Optical Interface, Optical Module Types, Direct Attach Copper, Energy Efficient Ethernet, Core Voltage, Digital I/O, Analog Voltage, Reference Clock, JTAG, Package Type

88E2180

Octal EEE 10/100/1G/2.5G/5GBASE-T PHY

8	No	No	Yes	No	No	Yes	5G, 2.5G, 1G, 100M, 10M	USXGMII-M, XFI, 5GBASE-R, 2500BASE-X, SGMII	No	No	No	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 1.8V, 3.3V	50, 156.25 MHz	Yes	529-HFCBGA
---	----	----	-----	----	----	-----	-------------------------	---	----	----	----	-----	-------	--------------------------	------------------	----------------	-----	------------

88E2110

Single EEE 10/100/1G/2.5G/5GBASE-T PHY

1	No	No	Yes	No	No	Yes	5G, 2.5G, 1G, 100M, 10M	USXGMII-M, XFI, 5GBASE-R, 2500BASE-X, SGMII	No	No	No	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 1.8V, 3.3V	50, 156.25 MHz	Yes	104-HFCBGA
---	----	----	-----	----	----	-----	-------------------------	---	----	----	----	-----	-------	--------------------------	------------------	----------------	-----	------------

88E2040P

Quad EEE 10/100/1G/2.5G/5GBASE-T PHY with MACSec, PTP

4	No	Yes	Yes	Yes	Yes	Yes	5G, 2.5G, 1G, 100M, 10M	USXGMII, XFI, RXAUI, 5GBASE-R, 2500BASE-X, SGMII	No	No	No	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	484-HFCBGA
---	----	-----	-----	-----	-----	-----	-------------------------	--	----	----	----	-----	-------	--------------------------	----------------------------	----------------	-----	------------

88E2040L

Quad EEE 10/100/1G/2.5G/5GBASE-T PHY

4	No	No	Yes	No	No	Yes	5G, 2.5G, 1G, 100M, 10M	USXGMII, XFI, RXAUI, 5GBASE-R, 2500BASE-X, SGMII	No	No	No	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	484-HFCBGA
---	----	----	-----	----	----	-----	-------------------------	--	----	----	----	-----	-------	--------------------------	----------------------------	----------------	-----	------------

Alaska M Multi-Gigabit Ethernet

Transceivers

Number of Ports
Optical (Line)
MACSec (LinkCrypt®)
I-Temp
1-Step PTP (1588 v2)
2-Step PTP
SyncE
BASE-T Speeds (Copper)
Host Interfaces
Optical Interface
Optical Module Types
Direct Attach Copper
Energy Efficient Ethernet
Core Voltage
Digital I/O
Analog Voltage
Reference Clock
JTAG
Package Type

88E2010P
Single EEE 10/100/1G/2.5G/5GBASE-T PHY with MACSec, PTP

1	No	Yes	Yes	Yes	Yes	Yes	Yes	5G, 2.5G, 1G, 100M, 10M	USXGMII, XFI, RXAUI, 5GBASE-R, 2500BASE-X, SGMII	No	No	No	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	168-HFCBGA
---	----	-----	-----	-----	-----	-----	-----	-------------------------	--	----	----	----	-----	-------	--------------------------	----------------------------	----------------	-----	------------

88E2010
Single EEE 10/100/1G/2.5G/5GBASE-T PHY

1	No	No	Yes	No	No	Yes	Yes	5G, 2.5G, 1G, 100M, 10M	USXGMII, XFI, RXAUI, 5GBASE-R, 2500BASE-X, SGMII	No	No	No	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	168-HFCBGA
---	----	----	-----	----	----	-----	-----	-------------------------	--	----	----	----	-----	-------	--------------------------	----------------------------	----------------	-----	------------

Alaska 1-Gigabit Ethernet

Transceivers

Number of Ports
Optical (Line)
MACSec (LinkCrypt®)
I-Temp
1-Step PTP (1588 v2)
2-Step PTP
SyncE
BASE-T Speeds (Cu)
Optical Line Interfaces (SGMII)
Mac Interfaces
Energy Efficient Ethernet
Core Voltage
Digital I/O
Analog Voltage
Internal Regulator
Integrated Passives
Reference Clock
JTAG
Package Type

Single Port Devices

Alaska 88E1518
EEE 10/100/1000BASE-T PHY with RGMII

1	No	No	No	No	Yes	Yes	Yes	10M/100M/1G	No	RGMII	Yes	1.0V	1.8V	1.8V/3.3V	Switch-cap Regulator	Yes	25 MHz	No	48-QFN
---	----	----	----	----	-----	-----	-----	-------------	----	-------	-----	------	------	-----------	----------------------	-----	--------	----	--------

Alaska 88E1514P
EEE 10/100/1000BASE-T PHY with SGMII, Copper/Fiber Autotmedia Detect and Low-Latency (1Step-PTP) 1588 v2 support

1	No	No	No	Yes	Yes	Yes	Yes	10M/100M/1G	No	SGMII	Yes	1.0V	1.8V/2.5V/3.3V	1.8V/3.3V	Switch-cap Regulator	Yes	25 MHz	No	56-QFN
---	----	----	----	-----	-----	-----	-----	-------------	----	-------	-----	------	----------------	-----------	----------------------	-----	--------	----	--------

Alaska 88E1514
EEE 10/100/1000BASE-T PHY with SGMII, Copper/Fiber Autotmedia Detect

1	No	No	No	No	Yes	Yes	Yes	10M/100M/1G	No	SGMII	Yes	1.0V	1.8V/2.5V/3.3V	1.8V/3.3V	Switch-cap Regulator	Yes	25 MHz	No	56-QFN
---	----	----	----	----	-----	-----	-----	-------------	----	-------	-----	------	----------------	-----------	----------------------	-----	--------	----	--------

Alaska 1-Gigabit Ethernet

Transceivers

Number of Ports
Optical (Line)
MACSec (LinkCrypt)
1-Temp
1-Step PTP (1588 v2)
2-Step PTP
SyncE
BASE-T Speeds (CU)
Optical Line Interfaces (SGMI)
Mac Interfaces
Energy Efficient Ethernet
Core Voltage
Digital I/O
Analog Voltage
Internal Regulator
Integrated Passives
Reference Clock
JTAG
Package Type

Alaska 88E1512P
EEE 10/100/1000BASE-T PHY with RGMII, SGMII, Copper/Fiber Autoselect Detect and Low-Latency (1Step-PTP) 1588 v2 support

Alaska 88E1512
EEE 10/100/1000BASE-T PHY with RGMII, SGMII Copper/Fiber Autoselect Detect

Alaska 88E1510Q
EEE 10/100/1000BASE-T PHY with RGMII and Low-Latency (1Step-PTP) 1588 v2 support

Alaska 88E1510P
EEE 10/100/1000BASE-T PHY with RGMII and Low-Latency (1Step-PTP) 1588 v2 support

Alaska 88E1510
EEE 10/100/1000BASE-T PHY with RGMII

Alaska 88E1112
10/100/1000BASE-T PHY with Dual SERDES/SGMII

Alaska 88E1111
10/100/1000BASE-T PHY with multiple MAC Interfaces

Quad-Port Devices

Alaska 88E1548P
EEE 100/100/1000BASE-T PHY with QSGMII

Number of Ports	Optical (Line)	MACSec (LinkCrypt)	1-Temp	1-Step PTP (1588 v2)	2-Step PTP	SyncE	BASE-T Speeds (CU)	Optical Line Interfaces (SGMI)	Mac Interfaces	Energy Efficient Ethernet	Core Voltage	Digital I/O	Analog Voltage	Internal Regulator	Integrated Passives	Reference Clock	JTAG	Package Type
1	Yes	No	Yes	Yes	Yes	Yes	10M/100M/1G	SGMII, 100BASE-FX, 1000BASE-X, SFP	RGMII, SGMII, MII	Yes	1.0V	1.8V/2.5V/3.3V	1.8V/3.3V	Switch-cap Regulator	Yes	25 MHz	No	56-QFN
1	Yes	No	Yes	No	Yes	Yes	10M/100M/1G	SGMII, 100BASE-FX, 1000BASE-X, SFP	RGMII, SGMII	Yes	1.0V	1.8V/2.5V/3.3V	1.8V/3.3V	Switch-cap Regulator	Yes	25 MHz	No	56-QFN
1	No	No	Yes	Yes	Yes	Yes	10M/100M/1G	No	RGMII	Yes	1.0V	1.8V/2.5V/3.3V	1.8V/3.3V	Switch-cap Regulator	Yes	25 MHz	No	48-QFN
1	No	No	Yes	Yes	Yes	Yes	10M/100M/1G	No	RGMII, MII	Yes	1.0V	1.8V/2.5V/3.3V	1.8V/3.3V	Switch-cap Regulator	Yes	25 MHz	No	48-QFN
1	No	No	Yes	No	Yes	Yes	10M/100M/1G	No	RGMII	Yes	1.0V	2.5V/3.3V	1.8V/3.3V	Switch-cap Regulator	Yes	25 MHz	No	48-QFN
1	Yes	No	Yes	No	No	No	10M/100M/1G	100BASE-FX, 1000BASE-X, SFP	SGMII	No	1.2V	2.5V	2.5V	No	No	25 MHz	No	64-QFN
1	Yes	No	Yes	No	No	No	10M/100M/1G	SGMII, 100BASE-FX, 1000BASE-X, SFP	RGMII, SGMII, MII, TBI, RTBI	No	1.0V/1.2V	2.5V	2.5V	No	No	25, 125 MHz	Yes	Multiple Packages
4	Yes	Yes	Yes	Yes	Yes	Yes	10M/100M/1G	SGMII, 100BASE-FX, 1000BASE-X, SFP	SGMII, QSGMII	Yes	1.0V	1.2V/1.8V/2.5V/3.3V	1.8V/3.3V	No	Yes	25, 125, 156.25 MHz	Yes	15mm x 15mm 196-pin TFBGA

Alaska 1-Gigabit Ethernet

Transceivers

Number of Ports
Optical (Line)
MACSec (LinkCrypt)
I-Temp
1-Step PTP (1588 v2)
2-Step PTP
SyncE
BASE-T Speeds (CU)
Optical Line Interfaces (SGMII)
Mac Interfaces
Energy Efficient Ethernet
Core Voltage
Digital I/O
Analog Voltage
Internal Regulator
Integrated Passives
Reference Clock
JTAG
Package Type

Alaska 88E1548M EEE 100/100/1000BASE-T PHY with SGMII plus MACSec, Automedia Detect	4	Yes	Yes	No	No	Yes	Yes	10M/100M/1G	SGMII, 100BASE-FX, 1000BASE-X, SFP	SGMII, QSGMII	Yes	1.0V	1.2V/1.8V/2.5V/3.3V	1.8V/3.3V	No	Yes	25, 125, 156.25 MHz	Yes	196-TFBGA
Alaska 88E1548 EEE 100/100/1000BASE-T PHY with QSGMII	4	Yes	No	No	No	No	No	10M/100M/1G	SGMII, 100BASE-FX, 1000BASE-X, SFP	SGMII, QSGMII	Yes	1.0V	1.2V/1.8V/2.5V/3.3V	1.8V/3.3V	No	Yes	25, 125, 156.25 MHz	Yes	15mm x 15mm 196-pin TFBGA
Alaska 88E1545M EEE 100/100/1000BASE-T PHY with QSGMII plus MACSec	4	No	Yes	No	No	No	No	10M/100M/1G	No	QSGMII	Yes	1.0V	1.2V/1.8V/2.5V/3.3V	1.8V/3.3V	No	Yes	25, 125, 156.25 MHz	Yes	128-LQFP
Alaska 88E1545 EEE 100/100/1000BASE-T PHY with QSGMII	4	No	No	No	No	No	No	10M/100M/1G	No	QSGMII	Yes	1.0V	1.2V/1.8V/2.5V/3.3V	1.8V/3.3V	No	Yes	25, 125, 156.25 MHz	Yes	128-LQFP
Alaska 88E1543M EEE 100/100/1000BASE-T PHY with SGMII plus MACSec	4	Yes	Yes	No	No	No	No	10M/100M/1G	SGMII, 100BASE-FX, 1000BASE-X, SFP	SGMII	Yes	1.0V	2.5V/3.3V	1.8V/3.3V	No	Yes	25, 125, 156.25 MHz	Yes	128-LQFP
Alaska 88E1543 EEE 100/100/1000BASE-T PHY with SGMII	4	Yes	No	No	No	No	No	10M/100M/1G	SGMII, 100BASE-FX, 1000BASE-X, SFP	SGMII	Yes	1.0V	2.5V/3.3V	1.8V/3.3V	No	Yes	25, 125, 156.25 MHz	Yes	128-LQFP
Alaska 88E1540M EEE 100/100/1000BASE-T PHY with QSGMII plus MACSec	4	No	Yes	No	No	Yes	Yes	10M/100M/1G	No	QSGMII	Yes	1.0V	1.2V/1.8V/2.5V/3.3V	1.8V/3.3V	No	Yes		Yes	196-TFBGA
Octal-Port-Devices																			
Alaska 88E1685 EEE 10/100/1000BASE-T PHY with QSGMII	8	No	No	No	No	No	No	10M/100M/1G	No	QSGMII	Yes	0.9V	1.2V/1.8V/2.5V/3.3V	1.5V/1.8V	No	Yes	125 MHz	Yes	128-LQFP
Alaska 88E1680M EEE 10/100/1000BASE-T PHY with QSGMII plus MACSec, PTP, SyncE	8	No	Yes	No	Yes	Yes	Yes	10M/100M/1G	No	QSGMII	Yes	0.9V	1.2V/1.8V/2.5V/3.3V	1.5V/1.8V	No	Yes	125, 156.25 MHz	Yes	128-LQFP

Alaska 1-Gigabit Ethernet

Transceivers

Alaska 88E1680
EEE 10/100/1000BASE-T PHY with QSGMII, MACSec, PTP, SyncE

Number of Ports	Optical (Line)	MACSec (LinkCrypt)	I-Temp	1-Step PTP (1588 v2)	2-Step PTP	SyncE	BASE-T Speeds (CU)	Optical Line Interfaces (SGMI)	Mac. Interfaces	Energy Efficient Ethernet	Core Voltage	Digital I/O	Analog Voltage	Internal Regulator	Integrated Passives	Reference Clock	JTAG	Package Type
8	No	No	Yes	No	Yes	Yes	10M/100M/1G	No	QSGMII	Yes	0.9V	1.2V/1.8V/ 2.5V/3.3V	1.5V/1.8V	No	Yes	125, 156.25 MHz	Yes	128-LQFP

Alaska X 10-Gigabit Ethernet

Transceivers

Copper (Base-T) PHYs

Alaska X 88X3340P
Quad EEE 10/100/1G/2.5G/5G/10GBASE-T PHY with XFI, MACSec, PTP

Alaska X 88X3340
Quad EEE 10/100/1G/2.5G/5G/10GBASE-T PHY with XFI

Alaska X 88X3310P
Single EEE 10/100/1G/2.5G/5G/10GBASE-T PHY with XFI, MACSec, PTP

Alaska X 88X3310
Single EEE 10/100/1G/2.5G/5G/10GBASE-T PHY with XFI

Number of Ports	Optical (Line)	MACSec (LinkCrypt)	I-Temp	1-Step PTP (1588 v2)	2-Step PTP	SyncE	Supported Speeds	Host Interfaces	Optical Interface	Optical Module Types	Direct Attach Copper	Energy Efficient Ethernet	Core Voltage	Digital I/O	Analog Voltage	Reference Clock	JTAG	Package Type
4	Yes	Yes	Yes	Yes	Yes	Yes	10G, 5G, 2.5G, 1G, 100M, 10M	USXGMII, XFI, RXAUI, 5GBASE-R, 2500BASE-X, SGMII	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	Yes	0.80V	1.2V/1.5V/ 1.8V/2.5V /3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	484-HFCBGA
4	Yes	No	Yes	No	No	Yes	10G, 5G, 2.5G, 1G, 100M, 10M	USXGMII, XFI, RXAUI, 5GBASE-R, 2500BASE-X, SGMII	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	Yes	0.80V	1.2V/1.5V/ 1.8V/2.5V /3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	484-HFCBGA
1	Yes	Yes	Yes	Yes	Yes	Yes	10G, 5G, 2.5G, 1G, 100M, 10M	USXGMII, XFI, RXAUI, XAUI, 5GBASE-R, 2500BASE-X, SGMII	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	Yes	0.80V	1.2V/1.5V/ 1.8V/2.5V /3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	168-HFCBGA
1	Yes	No	Yes	No	No	Yes	10G, 5G, 2.5G, 1G, 100M, 10M	USXGMII, XFI, RXAUI, XAUI, 5GBASE-R, 2500BASE-X, SGMII	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	Yes	0.80V	1.2V/1.5V/ 1.8V/2.5V /3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	168-HFCBGA

Alaska X 10-Gigabit Ethernet

Transceivers

Number of Ports
Optical (Line)
MACSec (LinkCrypt)
1-Temp
1-Step PTP (1588 v2)
2-Step PTP
SyncE
Supported Speeds
Host Interfaces
Optical Interface
Optical Module Types
Direct Attach Copper
Energy Efficient Ethernet
Core Voltage
Digital I/O
Analog Voltage
Reference Clock
JTAG
Package Type

Alaska X 88X3240P Quad EEE 10/100/1G/10GBASE-T PHY with XFI, MACSec, PTP	4	Yes	Yes	No	Yes	Yes	Yes	10G, 1G, 100M, 10M	XFI, RXAUI, SGMII	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 2.0V, 2.5V	50, 156.25 MHz	Yes	484-HFCBGA
Alaska X 88X3240 Dual EEE 10/100/1G/10GBASE-T PHY with XFI	4	Yes	No	No	No	No	Yes	10G, 1G, 100M, 10M	XFI, RXAUI, SGMII	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 2.0V, 2.5V	50, 156.25 MHz	Yes	484-HFCBGA
Alaska X 88X3220P Dual EEE 10/100/1G/10GBASE-T PHY with XFI, MACSec, PTP	2	Yes	Yes	No	Yes	Yes	Yes	10G, 1G, 100M, 10M	XFI, RXAUI, SGMII	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 2.0V, 2.5V	50, 156.25 MHz	Yes	256-HFCBGA
Alaska X 88X3220 Dual EEE 10/100/1G/10GBASE-T PHY with XFI	2	Yes	No	No	No	No	Yes	10G, 1G, 100M, 10M	XFI, RXAUI, SGMII	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	Yes	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 2.0V, 2.5V	50, 156.25 MHz	Yes	256-HFCBGA
Fiber/Backplane PHYs																			
Alaska X 88X2340P Quad-10G PHY with MacSec and PTP	4	Yes	Yes	Yes	Yes	Yes	No	10G, 1G	XFI	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	No	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	484-HFCBGA
Alaska X 88X2320P Dual-10G PHY with MacSec and PTP	2	Yes	Yes	No	Yes	Yes	No	10G, 1G	XFI	XFI/SFI	10GBASE-SR/ER/LR, 1000BASE-SX/LX	Yes	No	0.80V	1.2V/1.5V/1.8V/2.5V/3.3V	1.5V, 1.8V/2.0V, 2.3V/2.5V	50, 156.25 MHz	Yes	256-HFCBGA
Alaska X 88X2242 40G/Quad-10G EDC PHY	4	Yes	No	No	No	Yes	Yes	40G, 10G, 1G	XLAI, XFI, XAUI, RXAUI	SFI, XLPP1	40GBASE-SR4/LR4, 10GBASE-SR/ER/LR, 10GBASE-SW/EW/LW, 10GBASE-LRM, 1000BASE-SX/LX	Yes	No	1.0V	1.5V/1.8V/2.5V/3.3V	1.1V/1.5V	156.25, 155.52 MHz	Yes	324-FCBGA
Alaska X 88X2222 Dual-10G EDC PHY with MacSec	2	Yes	No	No	No	No	Yes	10G, 1G	XAUI, RXAUI, XFI	SFI	10GBASE-SR/ER/LR, 10GBASE-SW/EW/LW, 10GBASE-LRM, 1000BASE-X	Yes	No	1.0V	1.5V/1.8V/2.5V/3.3V	1.1V/1.5V	156.25, 155.52 MHz	Yes	324-FCBGA

Alaska X 10-Gigabit Ethernet

Transceivers

Number of Ports
Optical (Line)
MACSec (LinkCrypt)
1-Temp
1-Step PTP (1588 v2)
2-Step PTP
SyncE
Supported Speeds
Host Interfaces
Optical Interface
Optical Module Types
Direct Attach Copper
Energy Efficient Ethernet
Core Voltage
Digital I/O
Analog Voltage
Reference Clock
JTAG
Package Type

Alaska X 88X2242M 40G/Quad-10G EDC PHY with MacSec	4	Yes	Yes	No	No	No	Yes	40G, 10G, 1G	XLAUI, XFI, XAUI, RXAUI	SFI, XLPPi	40GBASE-SR4/LR4, 10GBASE-SR/ER/LR, 10GBASE-SW/EW/LW, 10GBASE-LRM, 1000BASE-SX/LX	Yes	No	1.0V	1.5V/1.8V/2.5V/3.3V	1.1V/1.5V	156.25, 155.52 MHz	Yes	324-FCBGA
Alaska X 88X2222M Dual-10G EDC PHY with MacSec	2	Yes	Yes	No	No	No	Yes	10G, 1G	XAUI, RXAUI, XFI	SFI	10GBASE-SR/ER/LR, 10GBASE-SW/EW/LW, 10GBASE-LRM, 1000BASE-X	Yes	No	1.0V	1.5V/1.8V/2.5V/3.3V	1.1V/1.5V	156.25, 155.52 MHz	Yes	324-FCBGA
Alaska X 88X2242P 40G/Quad-10G EDC PHY with MacSec and PTP	4	Yes	Yes	No	Yes	Yes	Yes	10G, 1G	XAUI, RXAUI, XFI, KR	SFI	10GBASE-SR/ER/LR, 10GBASE-SW/EW/LW, 10GBASE-LRM, 1000BASE-X	Yes	No	1.0V	1.5V/1.8V/2.5V/3.3V	1.1V/1.5V	156.25, 155.52 MHz	Yes	324-FCBGA
Alaska X 88X2222P Dual-10G EDC PHY with MacSec, and PTP	2	Yes	Yes	No	Yes	Yes	Yes	10G, 1G	XAUI, RXAUI, XFI, KR	SFI	10GBASE-SR/ER/LR, 10GBASE-SW/EW/LW, 10GBASE-LRM, 1000BASE-X	Yes	No	1.0V	1.5V/1.8V/2.5V/3.3V	1.1V/1.5V	156.25, 155.52 MHz	Yes	324-FCBGA

Fast Ethernet (FE) PHY

Transceivers

Number of Ports
Optical (Line)
MACSec (LinkCrypt)
1-Temp
1-Step PTP (1588 v2)
10/100BASE-T
100BASE-FX
Mac Interfaces
Core Voltage
Digital I/O
Analog Voltage
Internal Regulator
Virtual Cable Tester
Programmable LED
RoHS 6/6, Green*
JTAG
Package Type

Single-Port Devices																				
88E3015 10/100BASE-T Fast Ethernet PHY	1	Yes	No	No	No	Yes	Yes			MII, RGMII		1.2V	2.5V/3.3V	2.5V	Yes	Yes	Yes	R	No	56-QFN
88E3016 10/100BASE-T Fast Ethernet PHY	1	Yes	No	No	No	Yes	Yes			RGMII		1.2V	2.5V/3.3V	2.5V	Yes	Yes	Yes	R	Yes	64-QFN

Fast Ethernet (FE) PHY


Transceivers

Number of Ports
Optical (Line)
MACSec (LinkCrypt)
I-Temp
1-Step PTP (1588 v2)
10/100BASE-T
100BASE-FX
Mac Interfaces
Core Voltage
Digital I/O
Analog Voltage
Internal Regulator
Virtual Cable Tester
Programmable LED
RoHS 6/6, Green*
JTAG
Package Type

88E3018 10/100BASE-T Fast Ethernet PHY	1	Yes	No	Yes	No	Yes	Yes	MII, RGMII	1.2V	2.5V/3.3V	2.5V	Yes	Yes	Yes	R	Yes	64-QFN
88E3019 10/100BASE-T Fast Ethernet PHY	1	No	No	No	No	Yes	No	MII, RMII, RGMII	1.2V	2.5V/3.3V	2.5V	No	Yes	Yes	G	No	32-QFN
Octal-Port Devices																	
88E3082 10/100BASE-T Octal PHY	8	Yes	No	Yes	No	Yes	Yes	RMII, SMII, SSSMII, DDR-SSSMII	1.5V	2.5V/3.3V	2.5V	Yes	Yes	Yes	R	Yes	224-TFBGA
88E3083 10/100BASE-T Octal PHY	8	Yes	No	No	No	Yes	Yes	SMII, SSSMII, DDR-SSSMII	1.5V	2.5V/3.3V	2.5V	Yes	Yes	Yes	R	Yes	128-LQFP

AVASTAR™

Wireless

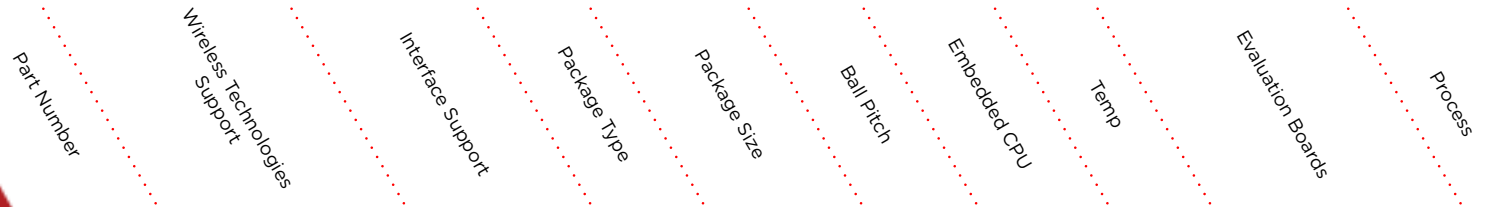

AVASTAR 8900 Family											
Part Number	Wireless Technologies	Interface Support	Package Type	Package Size	Ball Pitch	Embedded CPU	Temp	Evaluation Boards	Process		
88W8997	802.11 a/b/g/n/ac 2x2 + BT 4.0, Dual-mode	PCIE, SDIO 3.0, USB 3.0/2.0, UART	QFN, CSP	9mm x 9mm & Chip Scale	400um, 350um	Yes	-30 to +85C	RD-88W-8997-PCIE/SD/USB	28nm		
88W8977	802.11 a/b/g/n/ac 1x1 + BT 4.0, Dual-mode	SDIO 3.0, UART	QFN, eWLP	8mm x 8mm & Wafer-Level	400um	Yes	-30 to +85C	RD-88W-8977e/Q	28nm		
88W8964	802.11 a/b/g/n/ac 4x4	PCIE, UART	aQFN	11.8mm x 11mm	650um	Yes	0 to +70C	RD-88W-AP8964-DR2	28nm		
AVASTAR 8800 Family											
88W8897	802.11 a/b/g/n/ac 2x2 + BT 4.0, Dual-mode	PCIE, SDIO 3.0, USB 2.0, UART	QFN, CSP	9.5mm x 11mm & Chip Scale	400um	Yes	-30 to +85C	RD-88W-8897PCIE/SD	40nm		
88W8887	802.11a/b/g/n/ac 1x1 + BT 4.0 Dual-mode	SDIO 3.0, UART	QFN, CSP	9mm x 9mm & Chip Scale	400um	Yes	-30 to +85C	RD-88W-8887-AGC/Q	40nm		
88W8864	802.11 a/b/g/n/ac 4x4	PCIE, UART	aQFN	11.8mm x 11mm	800um	Yes	0 to +70C	RD-88W-AP-8864DR2	40nm		
88W8801	802.11a/b/g/n 1x1 Dual-mode	SDIO 3.0, USB 2.0	QFN	6mm x 6mm	400um	Yes	-30 to +85C	RD-88W-SD/USB 8801	40nm		

Marvell

Marvell first revolutionized the digital storage industry by moving information at speeds never thought possible. Today, that same breakthrough innovation remains at the heart of the company's storage, network infrastructure, and wireless connectivity solutions. With leading intellectual property and deep system-level knowledge, Marvell's semiconductor solutions continue to transform the enterprise, cloud, automotive, industrial, and consumer markets.

Contact Us

For additional information, please visit our website at www.marvell.com/sales for a Marvell sales office or representative in your area.

KEY FACTS

Founded: 1995

Stock Symbol: MRVL (NASDAQ)

President and Chief Executive Officer: Mr. Matt Murphy

Employees: 5,000+

Patents worldwide 9,000+

Marvell US Headquarters:
Marvell Semiconductor, Inc.
5488 Marvell Lane
Santa Clara, CA 95054
Phone: 408-222-2500

Marvell Asia Headquarters:
Marvell Asia Pte, Ltd.
No. 8 Tai Seng Link
Singapore 534158
Phone: (65) 6756-1600

Marvell European Headquarters:
Marvell Switzerland Sarl
Route de Pallatex 17
CH-1163 Etoy
Switzerland

Website: www.marvell.com