

RC6500 Installation and operating instructions

The RKR24 keychain remote turns on and off a light or appliance plugged into the RTM75 Transceiver. It also lets you turn on and off two individually coded X10 Modules and brighten and dim lights connected to Lamp Modules and Wall Switch Modules (sold separately). The top two ON-OFF buttons control the RTM75 as well as X10 Modules set to A1. The middle two buttons control X10 Modules set to A2. You can easily change the buttons to control any two consecutive Modules. The RKR24 is normally set to Housecode A, but you can easily change it to any letter between A and P.

1. Plug in the RTM75 Transceiver and connect a light or appliance to it (observe ratings on back).
2. To turn the RTM75 on or off, or any X10 Modules set to Unit Code 1, (on Housecode A) press the first (top) ON or OFF button. To turn on or off X10 Modules set to Unit Code 2 (on Housecode A) press the second (bottom) ON or OFF button. To brighten or dim Lamp Modules or Wall Switch Modules press the number button first, then press Bright or Dim button. If you want to control Modules 1 and 2 on Housecode A, that's it. You don't need to read any further.

To change the Housecode

- Press and hold the first (top) ON and OFF buttons at the same time for 2-3 seconds to enter Program Mode (the LED stays on).
- Press and release the first (top) ON button the appropriate number of times for the Housecode you want to set. Once for A, twice for B, etc. The LED blinks off for each press.
- Press the second (bottom) ON or OFF button to return to Normal Mode. The unit will also return to Normal Mode if no keys are pressed for more than 30 seconds.


To change the Unit Code for the first (top) two buttons

- (the second pair of buttons are always one # higher than the first pair, i.e. if you set the first button to 6, the second button controls 7, etc.).
- Press and hold the first (top) ON and OFF buttons at the same time for 2-3 seconds to enter Program Mode (the LED stays on).
 - Press and release the first (top) OFF button the appropriate number of times for the Unit Code you want to set. Once for 1, twice for 2, etc. The LED blinks off for each press.
 - Press the second (bottom) ON or OFF button to return to Normal Mode. The unit will also return to Normal Mode if no keys are pressed for more than 30 seconds.

To change the battery:

Pry the unit apart and fit a CR2025 Lithium 3V battery. Observe polarity.

F.C.C. CAUTION - THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: (1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE. AND (2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRABLE OPERATION.
NOTE: NO CHANGES OR MODIFICATIONS MAY BE MADE TO THE UNITS. ANY CHANGES MADE TO THE UNITS WILL VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

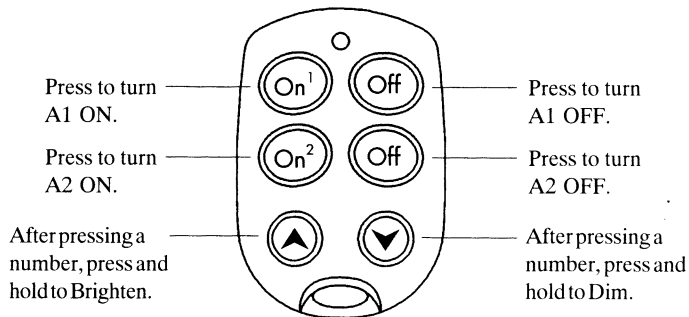

X10 (USA) INC. LIMITED 1-YEAR WARRANTY

X10 (USA) Inc. warrants X10 products to be free from defective material and workmanship for a period of one (1) year from the original date of purchase at retail. X10 (USA) Inc. agrees to repair or replace, at its sole discretion, a defective X10 product if returned to X10 (USA) Inc. within the warranty period and with proof of purchase.

If service is required under this warranty:

1. Return the defective unit postage prepaid to X10 (USA) Inc. (see address on back).
2. Enclose a check for \$4.00 to cover postage and handling.
3. Enclose a dated proof of purchase.
4. X10 is not responsible for shipping damage.
Units to be returned should be packed carefully.
5. For additional warranty information, contact X10 (USA) Inc.

Your Name

Address

Date Purchased 20..... Store where purchased

FROM

X10 (USA) Inc.

3824 North 5th St., Suite C, North Las Vegas, NV 89032

First Name

Last Name

Street Address - No P.O. Box numbers (for U.P.S.)

City

State

Zip

CONTENTS - MERCHANDISE

RETURN POSTAGE GUARANTEED

POSTMASTER: THIS PARCEL MAY BE OPENED FOR POSTAL INSPECTION

X10 (USA) Inc.

**3824 North 5th St., Suite C,
North Las Vegas, NV 89032**

Mini Timer MT10A

A Controller, Timer and Alarm Clock all in one! Programs up to 4 modules to go on and off at specific times, twice a day. Controls 8 modules instantly. Dims lights too.

Maxi Controller SC503

Lets you control up to 16 X10 Modules at the touch of a button from anywhere in the house. Dims lights too!

Mini Controller MC460

Lets you control up to 8 X10 Modules at the touch of a button from anywhere in the house. Dims lights too!

2-Way Home Control Interface CK11A

Set up from an IBM compatible PC to control up to 256 X10 Modules. ActiveHome software & cable included.

Thermostat Set-Back TH2807

Automatically sets-back your central heating/air conditioning. Mounts on the wall under your existing thermostat and plugs into an Appliance Module.

Telephone Responder TR16A

Lets you control up to 10 lights and appliances from any outside touch-tone phone.

Wireless Remote Control System RC5000

Lets you control 16 X10 modules from inside or outside your home. Can also dim and brighten Lamp Modules and Wall Switch Modules. Works with the HR12A PalmPad Remote and X10 RF Wall Switches (RSS18, RSS20).

Lamp Module LM465

Can be Dimmed and Brightened from any X10 Controller. Responds to "All lights on". Rated for 300 W. Incandescent only.
2-Way version LM14A.

Appliance Module - AM486/AM466

Two pin polarized (AM486) or 3 pin grounded (AM466). For controlling an air conditioner, TV, stereo, etc. anywhere in the home. Rated 15A for heaters, coffee pots etc.; 1/3 H.P. for motors; 400W for TVs; 500W for lamps. *2-Way versions available AM14A (2 pin), AM15A (3 pin).*

Wall Switch Module WS467

For controlling important indoor and outdoor security lights. Replaces your existing wall switch and installs like a regular dimmer. Dimmed/brightened from any X10 Controller. Rated 500W incandescent only.

3 - Way Wall Switch Module WS4777

For controlling a light which is controlled by two switches. Same features as WS467.

Split Receptacle Module SR227

Replaces existing wall outlet. The top outlet functions like an Appliance Module, the bottom one is a regular outlet. Rated 15A. Controls ANYTHING which normally plugs into a regular AC outlet.

Universal Module UM506

Isolated contact relay and beeper. Can be set for momentary or continuous operation. Not compatible with DS7000 and DCS700 security systems.