




S1232F

Before you begin...

1. Confirm your target matches this MEMORY FOOTPRINT

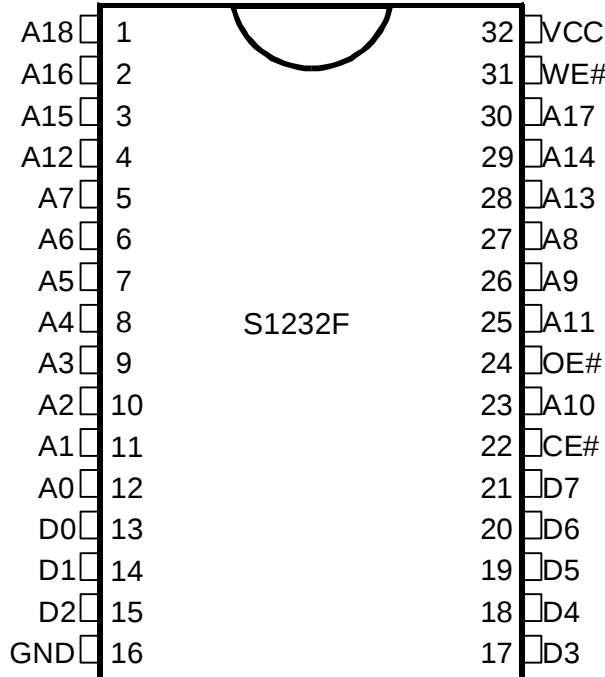

- ☐ 32 pin DIP cable, 8 bit memories
- ☐ Maximum memory size 512k Bytes
- ☐ Organized as 512k x 8 bit
- ☐ Maximum PromICE: P1040
- ☐ For 3 Volt parts, 3 Volt adapter (GEI Part # 3VA8) is required.

Note: Maximum memory size is shown in footprint. For smaller memories, unused lines must be connected to V_{cc} to ensure proper PromICE operation.

2. Confirm that you have received all parts of the Complete Cable Assembly



Memories Supported

- ☐ Supports 32 pin DIP Flash devices like the 29F040 and others.
- ☐ www.promice.com/memories.htm contains a listing of all memories supported by Grammar Engine target cables. **Note:** This cable supports both ROM and flash memories.

Notes and Precautions	Always turn target power OFF when connecting or disconnect PromICE target cables. Always leave Dip cable on the foam pad when not in use.	If your target has capacitors, allow sufficient discharge time. Connecting with the power on can damage cables or the PromICE. The dip cable should have come with a foam pad already on it.
------------------------------	---	--

**For Technical Support, contact Grammar Engine at 614-899-7878 or support@gei.com
For Sales, contact Grammar Engine Inc. www.gei.com or 1.800.PROMICE.**

**Installation
Instructions**

Step	Action	Notes
1.	Verify that you have the correct cable for the memory you are emulating.	If you have the wrong cable, contact Grammar Engine or your distributor for a replacement.
2.	Connect PromICE.	With the power off to your PromICE, connect the shielded ground plane cables to your PromICE.


You are now ready to power up your target and PromICE. Please consult your PromICE manual for further setup information.

Contact your Grammar Engine Sales Representative to order these parts and accessories:

Cable Parts	S1232F	12" shielded 32 pin DIP cable
-------------	--------	-------------------------------

S1232F

8-bit

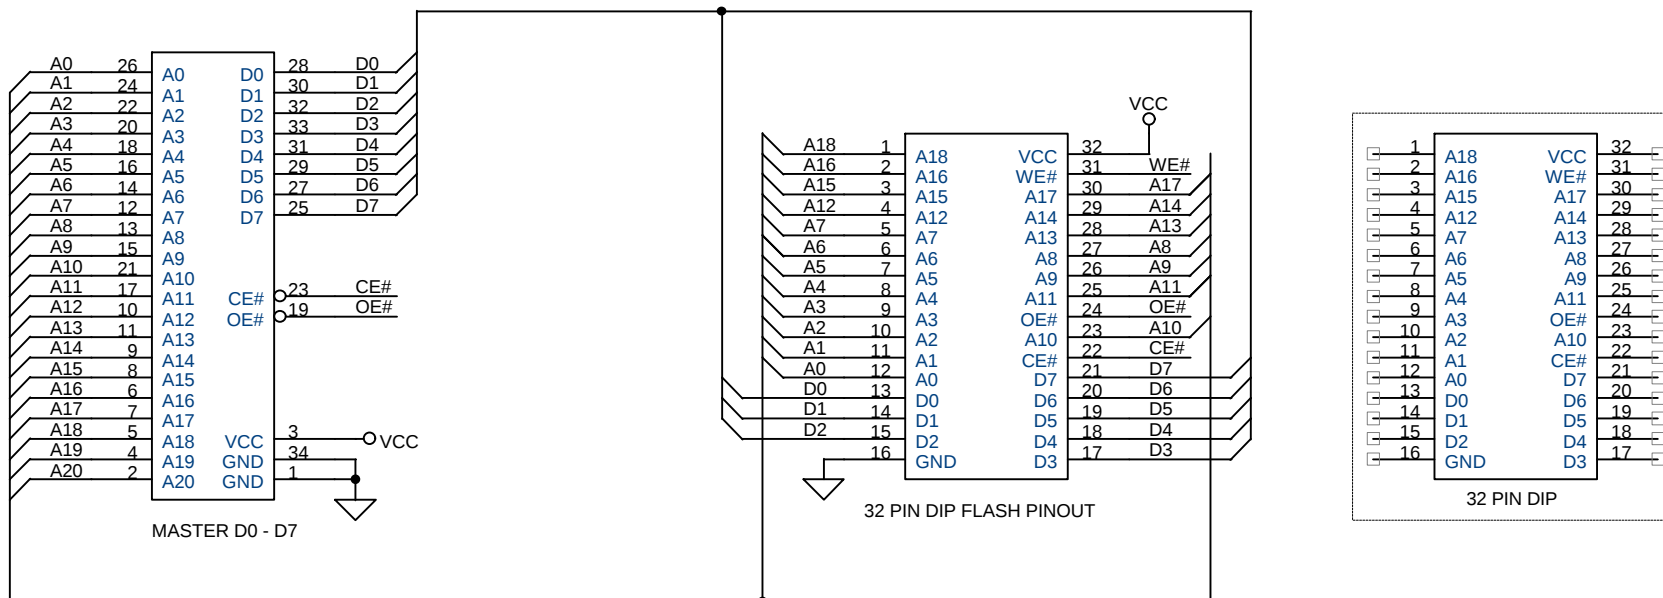

NOTES:

MAX SIZE: 512KB (P1040)
 SUPPORTS: AM29F040
 PROMISE JUMPER SETTING: 32

Grammar Engine Inc.

921 Eastwind Drive
 Suite 122
 Westerville OH 43081

Title

S1232F

Size
 A

Document Number
 019-0007

Rev
 1.0

Date: Monday, July 12, 1999

Sheet 1 of 1