

GC26-3793-4
File No. S370-30

Systems

**OS/VS Data Management
Macro Instructions**

**VS1 Release 4
VS2 Release 3**

p. 15

IBM

Fifth Edition (February 1975)

This edition replaces the previous edition (numbered GC26-3793-3) and makes that edition obsolete.

This edition applies both to Release 4 of OS/VS1 and to Release 3 of OS/VS2, and to all subsequent releases of either system unless otherwise indicated in new editions or technical newsletters.

(Information on the Mass Storage System is only for planning purposes until the availability of that product.)

Significant system changes are summarized under "OS/VS1 Summary of Amendments" or "OS/VS2 Summary of Amendments" following the list of figures. In addition, miscellaneous editorial and technical changes applicable to either or both of OS/VS1 and OS/VS2 have been made throughout the publication. Each technical change is marked by a vertical line to the left of the change.

Information in this publication is subject to significant change. Any such changes will be published in new editions or technical newsletters. Before using the publication, consult the latest *Virtual Storage Supplement (to IBM System/360 and System/370 Bibliography)*, GC20-0001, and the technical newsletters that amend the bibliography, to learn which editions and technical newsletters are applicable and current.

Requests for copies of IBM publications should be made to the IBM branch office that serves you.

Forms for readers' comments are provided at the back of the publication. If the forms have been removed, comments may be addressed to IBM Corporation, System Development Division, LDF Publishing—Department J04, 1501 California Avenue, Palo Alto, California 94304. All comments and suggestions become the property of IBM.

PREFACE

This publication contains descriptions and definitions for the data management macro instructions, other than those of VSAM (virtual storage access method), available in the assembler language. It provides application and system programmers with the necessary information to code the macro instructions.

Most of the information in this book applies to both OS/VS1 and OS/VS2. Information that applies only to OS/VS1 or OS/VS2 is explicitly identified in the text.

This publication is divided into these parts:

- “Introduction,” which contains a general description of macro instructions, the rules to be followed when macro instructions are coded, and a description of the notational conventions used throughout the publication.
- “Macro Instruction Descriptions,” which describes the function of each macro instruction and defines how each macro instruction is to be coded. The macro instructions are presented in alphabetic order with each macro instruction beginning on a right-hand page. The standard form of each macro instruction is described first, followed by the description of the list and execute form instructions; the list and execute forms are available only for those macro instructions that pass parameters in a list.
- “Appendix A: Status Information Following an Input/Output Operation,” which includes information about error indications available following an input/output operation.
- “Appendix B: Data Management Macro Instructions Available by Access Method,” which lists the macro instructions available for each of the data management access methods.
- “Appendix C: Device Capacities,” which lists device capacities that can be used as a guide when coding the block size and logical record length operands in the DCB macro instruction.
- “Appendix D: DCB Exit List Format and Contents,” which describes the format and content of the data control block exit list.
- “Appendix E: Control Characters,” which contains information about the control characters used to control spacing and skipping (printers) and stacker selection (card read punch or card punch).
- “Appendix F: Data Control Block Symbolic Field Names,” which lists the location, alignment, and description of the data control block symbolic field names.
- “Appendix G: Event Control Block,” which lists the location, alignment, and description of the event control block symbolic field names.
- “Appendix H: PDABD Symbolic Field Names,” which lists the location, alignment and description of the PDABD dummy control section.
- “Index,” which provides topic references to information in this book.

Prerequisite Publications

Before coding data management macro instructions, you should be familiar with the information in the following publications:

- *OS/VS—DOS/VS—VM/370 Assembler Language*, GC33-4010
- *OS/VS Data Management Services Guide*, GC26-3783
- *OS/VS1 Supervisor Services and Macro Instructions*, GC24-5103
- *OS/VS2 Supervisor Services and Macro Instructions*, GC28-0683

Related Macro Instruction Publications

The following publications contain descriptions of macro instructions for VSAM and for specialized applications such as teleprocessing, graphics, and magnetic/optical character recognition devices:

- *OS Data Management Services and Macro Instructions for IBM 1285/1287/1288*, GC21-5004
- *OS Data Management Services and Macro Instructions for IBM 1419/1275*, GC21-5006
- *OS and OS/VS Programming Support for the IBM 3505 Card Reader and IBM 3525 Card Punch*, GC21-5097
- *OS/VS BTAM*, GC27-6980
- *OS/VS Graphic Programming Services (GPS) for IBM 2250 Display Unit*, GC27-6971
- *OS/VS Graphic Programming Services (GPS) for IBM 2260 Display Station (Local Attachment)*, GC27-6972
- *OS/VS IBM 3886 Optical Character Reader Model 1 Reference*, GC24-5101
- *IBM 3890 Document Processor Machine and Programming Description*, GA24-3612
- *OS/VS Virtual Storage Access Method (VSAM) Options for Advanced Applications*, GC26-3819
- *OS/VS Virtual Storage Access Method (VSAM) Programmer's Guide*, GC26-3838

Related System Publications

This book refers to other publications that contain additional information about the operating system. Depending on the requirements of the individual installation, an application or system programmer may need these publications to code programs for the data management access methods.

In the list that follows, books designated OS/VS apply to both VS1 and VS2; books designated OS/VS1 apply only to VS1; and books designated OS/VS2 apply only to VS2.

- *OS/VS Checkpoint/Restart*, GC26-3784
- *OS/VS Linkage Editor and Loader*, GC26-3813
- *OS/VS Utilities*, GC35-0005
- *OS/VS1 Data Management for System Programmers*, GC26-3837
- *OS/VS1 Debugging Guide*, GC24-5093
- *OS/VS1 JCL Reference*, GC24-5099
- *OS/VS1 JCL Services*, GC24-5100
- *OS/VS1 Supervisor Services and Macro Instructions*, GC24-5103
- *OS/VS1 System Data Areas*, SY28-0605
- *OS/VS1 System Generation Reference*, GC26-3791
- *OS/VS2 JCL*, GC28-0692
- *OS/VS2 Supervisor Services and Macro Instructions*, GC28-0683
- *OS/VS2 System Programming Library: Data Management*, GC26-3830
- *OS/VS2 System Programming Library: Debugging Handbook*, GC28-0632
- *OS/VS2 System Programming Library: System Generation Reference*, GC26-3792

CONTENTS

Preface	3
Prerequisite Publications	4
Related Macro Instruction Publications	4
Related System Publications	4
Figures	11
OS/VS1 Summary of Amendments	13
Release 4	13
Release 3	13
Release 2	14
OS/VS2 Summary of Amendments	15
Release 3	15
Release 2	15
Introduction	17
Data Management Macro Instructions	17
Coding Aids	17
Bold Type	17
Italic Type	18
Brackets	18
OR Sign	18
Braces	18
Ellipses	19
Underscoring	19
Blank Symbol	19
Comprehensive Example	19
Macro Instruction Format	20
Rules for Register Usage	22
Rules for Continuation Lines	23
Macro Instruction Descriptions	25
BLDL—Build a Directory Entry List (BPAM)	27
Completion Codes	28
BSP—Backspace a Physical Record (BSAM—Magnetic Tape and Direct Access Only)	29
Completion Codes	29
BUILD—Build a Buffer Pool (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)	31
BUILDRCD—Build a Buffer Pool and a Record Area (QSAM)	33
BUILDRCD—List Form	35
BUILDRCD—Execute Form	37
CHECK—Wait for and Test Completion of a Read or Write Operation (BDAM, BISAM, BPAM, and BSAM)	39
CHKPT—Take a Checkpoint for Restart Within a Job Step (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)	41
CHKPT—List Form	45
CHKPT—Execute Form	47
CLOSE—Logically Disconnect a Data Set (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)	49
CLOSE—List Form	53
CLOSE—Execute Form	55
CNTRL—Control Online Input/Output Device (BSAM and QSAM)	57
DCB—Construct a Data Control Block (BDAM)	61

DCB—Construct a Data Control Block (BISAM)	69
DCB—Construct a Data Control Block (BPAM)	75
DCB—Construct a Data Control Block (BSAM)	83
DCB—Construct a Data Control Block (QISAM)	101
DCB—Construct a Data Control Block (QSAM)	111
DCBD—Provide Symbolic Reference to Data Control Blocks (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)	129
ESETL—End Sequential Retrieval (QISAM)	131
FEOV—Force End of Volume (BSAM and QSAM)	133
FIND—Establish the Beginning of a Data Set Member (BPAM)	135
Completion Codes	135
FREEBUF—Return a Buffer to a Pool (BDAM, BISAM, BPAM, and BSAM)	137
FREEDBUF—Return a Dynamically Obtained Buffer (BDAM and BISAM)	139
FREEPOOL—Release a Buffer Pool (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)	141
GET—Obtain Next Logical Record (QISAM)	143
GET—Obtain Next Logical Record (QSAM)	145
GET Routine Exits	147
GETBUF—Obtain a Buffer (BDAM, BISAM, BPAM, and BSAM)	149
GETPOOL—Build a Buffer Pool (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)	151
NOTE—Provide Relative Position (BPAM and BSAM—Tape and Direct Access Only)	153
OPEN—Logically Connect a Data Set (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)	155
OPEN—List Form	159
OPEN—Execute Form	161
PDAB—Construct a Parallel Data Access Block (QSAM)	163
PDABD—Provide Symbolic Reference to a Parallel Data Access Block (QSAM)	165
POINT—Position to a Relative Block (BPAM and BSAM—Tape and Direct Access Only)	167
PRTOV—Test for Printer Carriage Overflow (BSAM and QSAM—Online Printer and 3525 Card Punch, Print Feature)	169
PUT—Write Next Logical Record (QISAM)	171
PUT Routine Exit	172
PUT—Write Next Logical Record (QSAM)	173
PUT Routine Exit	174
PUTX—Write a Record from an Existing Data Set (QISAM and QSAM)	175
PUTX Exit Routine	175
READ—Read a Block (BDAM)	177
READ—Read a Block of Records (BISAM)	181
READ—Read a Block (BPAM and BSAM)	183
READ—Read a Block (Offset Read of Keyed BDAM Data Set Using BSAM)	185
READ—List Form	187
READ—Execute Form	189
RELEX—Release Exclusive Control (BDAM)	191
Completion Codes	191
RELSE—Release an Input Buffer (QISAM and QSAM Input)	193
SETL—Set Lower Limit of Sequential Retrieval (QISAM Input)	195
SETL Exit	196
SETPRT—Load UCS and FCB Images (BSAM, QSAM, and EXCP)	197
Completion Codes	199
SETPRT—List Form	201
SETPRT—Execute Form	203

STOW—Update Partitioned Data Set Directory (BPAM)	205
Completion Codes	207
SYNADAF—Perform SYNAD Analysis Function (BDAM, BISAM, BPAM, BSAM, EXCP, QISAM, and QSAM)	209
Completion Codes	211
Message Buffer Format	212
SYNADRLS—Release SYNADAF Buffer and Save Areas (BDAM, BISAM, BPAM, BSAM, EXCP, QISAM, and QSAM)	213
TRUNC—Truncate an Output Buffer (QSAM Output—Fixed- or Variable-Length Blocked Records)	215
WAIT—Wait for One or More Events (BDAM, BISAM, BPAM, and BSAM)	217
WRITE—Write a Block (BDAM)	219
WRITE—Write a Logical Record or Block of Records (BISAM)	221
WRITE—Write a Block (BPAM and BSAM)	223
WRITE—Write a Block (Create a BDAM Data Set with BSAM)	225
Completion Codes	227
WRITE—List Form	229
WRITE—Execute Form	231
XLATE—Translate to and from ASCII (BSAM and QSAM)	233
Appendix A: Status Information Following an Input/Output Operation	235
Data Event Control Block	235
Appendix B: Data Management Macro Instructions Available by Access Method	243
Appendix C: Device Capacities	245
Card Readers and Card Punches	245
Printers	245
Paper-Tape Reader	245
Magnetic-Tape Units	245
Direct-Access Devices	246
Appendix D: DCB Exit List Format and Contents	247
Appendix E: Control Characters	249
Machine Code	249
American National Standards Institute Control Characters	250
Appendix F: Data Control Block Symbolic Field Names	251
Data Control Block—Common Fields	251
Data Control Block—BPAM, BSAM, QSAM	252
Direct-Access Storage Devices Interface	254
Magnetic Tape Interface	254
Paper Tape Interface	255
Card Reader, Card Punch Interface	255
Printer Interface	256
Access Method Interface	256
BSAM, BPAM Interface	256
QSAM Interface	257
Data Control Block—ISAM	259
Data Control Block—BDAM	262
Appendix G: Event Control Block	265
Appendix H: PDABD Symbolic Field Names	267
Index	269

FIGURES

Figure 1. Exception Code Bits—BISAM	236
Figure 2. Exception Code Bits—QISAM	237
Figure 3. Exception Code Bits—BDAM	239
Figure 4. Register Contents on Entry to SYNAD Routine—QISAM	240
Figure 5. Register Contents on Entry to SYNAD Routine—BISAM	240
Figure 6. Register Contents on Entry to SYNAD Routine—BDAM, BPAM, BSAM, and QSAM	241
Figure 7. Status Indicators for the SYNAD Routine—BDAM, BPAM, BSAM, and QSAM	242

OS/VS1 SUMMARY OF AMENDMENTS

Release 4

New Programming Support

The IBM 3850 Mass Storage System (MSS) is supported with this release. The MSS virtual volumes are functionally equivalent to the 3330/3333 Disk Storage, Model 1. For information on MSS, see *OS/VS Mass Storage System (MSS) Planning Guide*, GC35-0011. MSS information is provided for planning purposes only until the system is available.

A new completion code for the BLDL macro has been added.

Release 3

New Devices

- The IBM 3330 Disk Storage (Model 11), IBM 3333 Disk Storage and Control (Model 11), and the IBM 3340 Disk Storage are now supported with this release.
- The system also supports the 3420 for Models 4, 6, and 8.
- The IBM 3890 Document Processor and IBM 3886 Optical Character Reader are supported with this release. For information on changes to macro instructions for these devices, see *IBM 3890 Document Processor Machine and Programming Description*, GA24-3612, or *OS/VS IBM 3886 Optical Character Reader Model 1 Reference*, GC24-5101.

Other Technical Changes

- Reason and return codes are now returned in registers 0 and 15, respectively, for BLDL, BSP, FIND, and the STOW macro instructions.
- The PDAB and PDABD macro instructions have been added for QSAM parallel input processing. The GET macro instruction for QSAM has also been changed to handle parallel input processing.

Editorial Changes

- The WAIT macro instruction has been added.
- The device capacity tables in Appendix C have been revised.
- Two charts of machine code control characters for printers and card punches have been added to Appendix E.
- A new appendix has been added which describes the symbolic field names in the PDABD macro instruction (Appendix H).

Release 2

New Devices

- The 3505 Card Reader and the 3525 Card Punch are now supported by VS1; the macro instructions affected by this change are CLOSE, CNTRL, DCB (BSAM and QSAM), OPEN, and PRTOV.
- The 2305-1 Drum Storage and the new 3333 Disk Storage are also now supported by VS1; capacity data for these devices has been added to the tables in Appendix C.

New Function

- DEB validity checking, a data protection feature formerly supported only by VS2, is now supported by VS1; this change affects the OPEN macro instruction.

Miscellaneous Changes

- Describe register contents upon entry to an EODAD routine (DCB macro instruction for BPAM, BSAM, QISAM, and QSAM).
- Restrict use of the temporary close (**TYPE=T**) option in a SYNAD routine (CLOSE macro instruction).
- Expand the description of the LEAVE option (FEOV macro instruction for BSAM and QSAM).
- Define a new return code for the CHKPT macro instruction.
- Delete tape labels as a source of buffer alignment (BFALN) data (DCB macro instruction for all access methods).

OS/VS2 SUMMARY OF AMENDMENTS

Release 3

New Programming Support

The IBM 3850 Mass Storage System (MSS) is supported with this release. The MSS virtual volumes are functionally equivalent to the 3330/3333 Disk Storage, Model 1. For information on MSS, see *OS/VS Mass Storage System (MSS) Planning Guide*, GC35-0011. MSS information is provided for planning purposes only until the system is available.

Exchange buffering support was removed for VS2 because it can badly affect performance in a virtual system. If exchange buffering is specified, it will be ignored by the system. If exchange buffering is denied by the system for any reason, move mode will be used instead. Move mode is compatible with exchange buffering.

Chained scheduling will now be supported by VS2 whether it is requested or not (except for printers and format-U input records). This support was changed to improve performance in a virtual system. Chained scheduling will not be used where it previously was not allowed.

For QSAM, BUFNO will now default to 5 buffers instead of 2.

Release 2

Information for Release 2 is provided for planning purposes only until this system is released.

New Devices

- The IBM 3330 Disk Storage (Model 11), IBM 3333 Disk Storage and Control (Model 11), and the IBM 3340 Disk Storage are supported with this release.
- The system also supports the 3420 for Models 4, 6, and 8.
- The IBM 3890 Document Processor and IBM 3886 Optical Character Reader are supported with this release. For information on changes to macro instructions for these devices, see *IBM 3890 Document Processor Machine and Programming Description*, GA24-3612, or *OS/VS IBM 3886 Optical Character Reader Model 1 Reference*, GC24-5101.

Other Technical Changes

- Reason and return codes are now returned in registers 0 and 15, respectively, for BLDL, BSP, FIND, and STOW macro instructions.
- The PDAB and PDABD macro instructions have been added for QSAM parallel input processing. The GET macro instruction for QSAM has also been changed to handle parallel input processing.
- The FREE option for the CLOSE macro instruction has been added.
- Any task sharing a DCB (which it did not open) can now issue the RELEX macro instruction to release exclusive control of a data block.
- Chained scheduling is supported in a virtual address space.

Editorial Changes

- The WAIT macro instruction has been added.
- The direct-access device capacity tables in Appendix C have been revised.
- Two charts of machine code control characters for printers and card punches have been added to Appendix E.
- A new appendix has been added which describes the symbolic field names in the PDABD macro instruction (Appendix H).

INTRODUCTION

Data Management Macro Instructions

A set of macro instructions is provided by IBM for communicating service requests to the data management access method routines. These macro instructions are available only when the assembler language is being used, and they are processed by the assembler program using macro definitions supplied by IBM and placed in the macro library when the operating system is generated.

The processing of the macro instruction by the assembler program results in a macro expansion, generally consisting of executable instructions and data in the form of assembler-language statements. The data fields are the parameters to be passed to the access method routine; the executable instructions generally consist of a branch around the data fields, instructions to load registers, and either a branch instruction or supervisor call (SVC) to give control to the proper program. The exact macro expansion appears as a part of the assembler listing.

A listing of a macro definition from SYS1.MACLIB (the library in which macro definitions are stored) can be obtained by using the utility program IEBPTPCH, which is described in *OS/VS Utilities*.

Before macro instructions are coded using this publication, the user should be familiar with the information contained in *OS/VS Data Management Services Guide*.

When programs that request supervisor services are being coded, the user should be familiar with the information contained in *OS/VS1 Supervisor Services and Macro Instructions* or *OS/VS2 Supervisor Services and Macro Instructions*.

When programs are being coded for more specialized applications such as teleprocessing, graphics, character recognition, or to use VSAM (virtual storage access method), the publication that describes the specific access method and/or device type should be used. Publications containing descriptions of the macro instructions for teleprocessing, graphics, character recognition devices, and VSAM are listed in the preface of this publication.

The operation of some macro instructions depends on the options selected when the macro instruction is coded. For these macro instructions, either separate descriptions are provided or the differences are listed within a single description. If no differences are explicitly listed, none exist. The description of each macro instruction starts on a right-hand page; the descriptions that do not apply to the access methods being used can be removed. Appendix B provides a list of the macro instructions available for each access method.

Coding Aids

Bold Type

Bold type is used for elements that you must code exactly as they are shown. These elements consist of macro names, keywords, and these punctuation symbols: commas, parentheses, and equal signs. Examples:

- **DCB**
- **CLOSE ,,,,TYPE=T**
- **MACRF=(PL,PTC)**
- **SK,5**

Italic Type

Italic type is used for elements for which you code values that you choose, usually according to specifications and limits described for each parameter. Examples:

- *number*
- *image-id*
- *count*

Brackets

Brackets, [], are used to enclose optional elements, which you may code or not code as you choose. Examples:

- [*length*]
- [MF=E]

OR Sign

The OR sign, |, is used to separate alternative elements. Examples:

- [REREAD | LEAVE]
- [*length* | 'S']

Braces

Braces, { }, are used to enclose alternative elements for which you must choose exactly one element, but never more than one element and never no element. Alternative items are usually separated by OR signs. Examples:

- BFTEK={S | E | A}
- {K | D}
- { *address* | S | 0 }

Sometimes, alternative elements—especially complicated alternatives—are grouped in a vertical stack of braces. Examples:

- MACRF= {(R[C | P])}
 {(W[C | P | L])}
 {(R[C],W[C])}
- DEVD= {DA
 [,KEYLEN= *absexp*]}
 {TA
 [,DEN={0 | 1 | 2 | 3 | 4}]
 [,TRTCH={C | E | ET | T}]}
- {PT
 [,CODE={A | B | C | F | I | N | T}]}
- $\left. \begin{array}{l} \text{DA[F]} \\ \text{DI[F | X]} \\ \text{DK[F | X]} \end{array} \right\}$

In these examples, you must choose exactly one element—one line—from the stack of alternative elements.

Ellipses

Ellipses, ..., indicate that elements may be repeated. Example:

- (*dcbaddr*, [(*options*)], ...)

Underscoring

Underscored elements indicate those alternative choices that are assumed if you don't make an explicit choice. Examples:

- HIARCHY={0 | 1}
- BFALN={F | D}

Blank Symbol

The blank symbol, \emptyset , is used to indicate the absence of operands. Example:

\emptyset	PDABD	\emptyset
-------------	-------	-------------

Comprehensive Example

- MF=(E, { *address* | (1) })

In this example, MF=(E, must be coded exactly as shown. Then, either *address* or (1) must be coded; the parentheses around the 1 are required. Finally, the closing parenthesis must be coded. Thus, MF=(E,(1)) might be coded.

- RECFM= {U[T][A | M]}
 {V[B | S | T | BS | BT][A | M]}
 {D[B][A]}
 {F[B | S | T | BS | BT][A | M]}

In this example, the first choice is among the four alternative elements (on four separate lines). Then, choices must be made within the major element chosen. Assuming that the major element beginning with F were chosen, you would code F; then you would choose one of B, S, T, BS, or BT if you liked; and, finally, you would choose one of A or M if you liked. Thus, FBTM or FA might be coded.

Macro Instruction Format

Data management macro instructions are written in the assembler language and, as such, are subject to the rules contained in *OS/VS—DOS/VS—VM/370 Assembler Language*. Data management macro instructions, like all assembler language instructions, are written in the following format:

Name	Operation	Operands	Comments
Symbol or blank	Macro name	None, one or more operands separated by commas	

The operands are used to specify services and options to be used and are written according to the following general rules:

- If the selected operand is shown in bold capital letters (for example, **MACRF=WL**), code the operand exactly as shown.
- If the selected operand is a character string in bold type (for example, if the type operand of a **READ** macro instruction is **SF**), code the operand exactly as shown.
- If the operand is shown in italic lowercase letters (for example, *dcb address*), substitute the indicated address, name, or value.
- If the operand is a combination of bold capital letters and italic lowercase letters (for example, **LRECL=absexp**), code the capital letters and equal sign exactly as shown and substitute the appropriate address, name, or value for the italic lowercase letters.
- Commas and parentheses are coded exactly as shown, except that the comma following the last operand coded should be omitted. The use of commas and parentheses is indicated by brackets and braces in the same manner as brackets and braces indicate the use of operands.
- Several macro instructions contain the designation 'S'. This operand, when used, must have the apostrophe on both sides of the S.

When substitution of a name, value, or address is required, the notation used to specify the operand depends on the operand being coded. The following shows two examples of the notations used to indicate how an operand can be coded:

DDNAME=*symbol*

In the above example, the only type of operand that can be coded is a valid assembler-language symbol.

dcb address—**RX-Type Address, (2-12), or (1)**

In the above example, the operand that can be substituted can be an RX-type address, any of the general registers 2 through 12, or general register 1.

The following describes the meaning of each notation used to show how an operand can be coded:

symbol

When this notation is shown, the operand can be any valid assembler-language symbol.

decimal digit

When this notation is shown, the operand can be any decimal digit up to the maximum value allowed for the specific operand being described.

(2-12)

When this notation is shown, the operand specified can be any of the general registers 2 through 12. All registers as operands must be coded in parentheses; for example, if register 3 is coded, it is coded as (3). When one of the registers 2 through 12 is used, it can be coded as a decimal digit, symbol (equated to a decimal digit), or an expression that results in a value of 2 through 12.

(1)

When this notation is shown, general register 1 can be used as an operand. When used as an operand in a macro instruction, the register must be specified as the decimal digit 1 enclosed in parentheses as shown above.

(0)

When this notation is shown, general register 0 can be used as an operand. When used as an operand in a macro instruction, the register must be specified as the decimal digit 0 enclosed in parentheses as shown above.

RX-Type Address

When this notation is shown, the operand can be specified as any valid assembler-language RX-type address. The following shows examples of each valid RX-type address:

Name	Operation	Operand
ALPHA1	L	1,39(4,10)
ALPHA2	L	REG1,39(4,TEN)
BETA1	L	2,ZETA(4)
BETA2	L	REG2,ZETA(REG4)
GAMMA1	L	2,ZETA
GAMMA2	L	REG2,ZETA
GAMMA3	L	2,=F'1000'
LAMBDA1	L	3,20(,5)

Both ALPHA instructions specify explicit addresses; REG1 and TEN are absolute symbols. Both BETA instructions specify implied addresses, and both use index registers. Indexing is omitted from the GAMMA instructions. GAMMA1 and GAMMA2 specify implied addresses. The second operand of GAMMA3 is a literal. LAMBDA1 specifies an explicit address with no indexing.

A-Type Address

When this notation is shown, the operand can be specified as any address that can be written as a valid assembler-language A-type address constant. An A-type address constant can be written as an absolute value, a relocatable symbol, or relocatable expression. Operands that require an A-type address are inserted into an A-type address constant during the macro expansion process. For more details about A-type address constants, refer to *OS/VS—DOS/VS—VM/370 Assembler Language*.

absexp

When this notation is shown, the operand can be an absolute value or expression. An absolute expression can be an absolute term or an arithmetic combination of absolute terms. An absolute term can be a nonrelocatable symbol, a self-defining term, or the length attribute reference. For more details about absolute expressions, refer to *OS/VS—DOS/VS—VM/370 Assembler Language*.

relexp

When this notation is shown, the operand can be a relocatable symbol or expression. A relocatable symbol or expression is one whose value changes by n if the program in which it appears is relocated n bytes away from its originally assigned area of storage. For more details about relocatable symbols and expressions, refer to *OS/VS—DOS/VS—VM/370 Assembler Language*.

Rules for Register Usage

Many macro instruction expansions include instructions that use a base register previously defined by a USING statement. The USING statement must establish addressability so that macro expansion can include a branch around the in line parameter list, if present, and refer to data fields and addresses specified in the macro instruction operands.

Macro instructions that use a BAL or BALR instruction to pass control to an access method routine, normally require that register 13 contain the address of an 18-word register-save area. The READ, WRITE, CHECK, GET, and PUT macro instructions are of this type.

Macro instructions that use a supervisor call (SVC) instruction to pass control to an access method routine may modify general registers 0, 1, 14, and 15 without restoring them. Unless otherwise specified in the macro instruction description, the contents of these registers are undefined when the system returns control to the problem program.

When an operand is specified as a register, the problem program must have inserted the value or address to be used into the register as follows:

- If the register is to contain a value, it must be placed in the low-order portion of the register unless the macro instruction description states otherwise. Any unused bits in the register should be set to zero.
- If the register is to contain an address, the address must be placed in the low-order three bytes of the register, and the high-order byte of the register should be set to zero.

Note that if the macro instruction accepts the RX-type address, the high-order byte of a register can be efficiently cleared by coding the parameter as 0 (reg) rather than just (reg). Then the macro instruction expands as:

```
LA parmreg,0(reg)      by macro
```

rather than:

```
LA reg,0(reg)          by user
```

and

```
LR parmreg,reg        by macro
```

Rules for Continuation Lines

The operand field of a macro instruction can be continued on one or more additional lines as follows:

1. Enter a continuation character (not blank, and not part of the operand coding) in column 72 of the line.
2. Continue the operand field on the next line, starting in column 16. All columns to the left of column 16 must be blank.

The operand field being continued can be coded in one of two ways. The operand field can be coded through column 71, with no blanks, and continued in column 16 of the next line, or the operand field can be truncated by a comma, where a comma normally falls, with at least one blank before column 71, and then continued in column 16 of the next line. An example of each method is shown in the following illustration:

Name	Operation	Operand	Comments
NAME1	OP1	OPERAND1, OPERAND2, OPERAND3, OPERAND4, OPERAND5, OPERAND6, OPERAND7, OPEX RAND8	THIS IS ONE WAY
NAME2	OP2	OPERAND1, OPERAND2, OPERAND3, OPERAND4	THIS IS ANOTHER WAY X X

MACRO INSTRUCTION DESCRIPTIONS

BLDL—Build a Directory Entry List (BPAM)

The BLDL macro instruction is used to complete a list of information from the directory of a partitioned data set. The problem program must supply a storage area; the area must include information about the number of entries in the list, the length of each entry, and the name of each data set member (or alias) before the BLDL macro instruction is issued. Data set member names in the list must be in alphameric order. All read and write operations using the same data control block must have been tested for completion before the BLDL macro instruction is issued.

The BLDL macro instruction is written as follows:


[symbol]	BLDL	dcb address ,list address
----------	------	------------------------------

dcb address—RX-type Address, (2-12), (1), or the decimal digit 0

The *dcb address* operand specifies the address of the data control block for an open partitioned data set, or zero can be specified to indicate that the data set is in a job library, step library, or link library.

list address—RX-Type Address, (2-12), or (0)

The *list address* operand specifies the address of the list to be completed when the BLDL macro instruction is issued. The *list address* must be on a halfword boundary. The following illustration shows the format of the list:

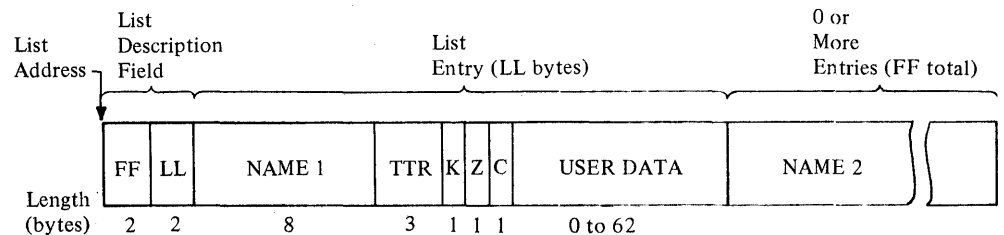

FF: This field must contain a binary value indicating the total number of entries in the list.

LL: This field must contain a binary value indicating the length, in bytes, of each entry in the list (must be an even number of bytes). If the exact length of the entry is known, specify the exact length. Otherwise, specify at least 58 bytes (decimal) if the list is to be used with an ATTACH, LINK, LOAD, or XCTL macro instruction. The minimum length for a list is 12 bytes.

NAME: This field must contain the member name or alias to be located. The name must start in the first byte of the name field and be padded to the right with blanks (if necessary) to fill the 8-byte field.

When the BLDL macro instruction is executed, five fields of the directory entry list are filled in by the system. The specified length (**LL**) must be at least 14 to fill in the **Z** and **C** fields. If the **LL** field is 12, only the **NAME**, **TT**, **R**, and **K** fields are returned. The five fields are:

TT: Indicates the relative track number where the beginning of the data set member is located.

R: Indicates the relative block (record) number on the track indicated by **TT**.

K: Indicates the concatenation number of the data set. For the first or only data set, this value is zero.

Z: Indicates where the system found the directory entry:

Code	Meaning
0	Private library
1	Link library
2	Job, task, or step library
3-255	Job, task, or step library of parent task n , where $n = Z-2$

C: Indicates the type (member or alias) for the name, the number of note list fields (TTRNs), and the length of the user data field (indicated in halfwords). The following describes the meaning of the eight bits:

Bit	Meaning
0=0	Indicates a member name.
0=1	Indicates an alias.
1-2	Indicate the number of TTRN fields (maximum of three) in the user data field.
3-7	Indicate the total number of halfwords in the user data field. If the list entry is to be used with an ATTACH, LINK, LOAD, or XCTL macro instruction, the value in bits 3 through 7 is 22 (decimal).

USER DATA: The user data field contains the user data from the directory entry. If the length of the user data field in the BLDL list is equal to or greater than the user data field of the directory entry, the entire user data field is entered into the list. Otherwise, the list contains only the user data for which there is space.

Completion Codes

When the system returns control to the problem program, the low-order byte of register 15 contains a *return* code; the low-order byte of register 0 contains a *reason* code, as follows:

Hexadecimal Codes		
Return (15)	Reason (0)	Meaning
00	00	Successful completion.
04	00	One or more entries in the list could not be filled; the list supplied may be invalid. If a search is attempted but the entry is not found, the R field (byte 11) for that entry is set to zero.
08	00	A permanent I/O error was detected when the system attempted to search the directory.
08	04	Insufficient virtual storage was available.
0C	00	The DCB for the JOBLIB or STEPLIB DD statement or the DCB specified in the TASKLIB parameter of the ATTACH macro was not open (VS1 only). (If the DCB for the JOBLIB or STEPLIB DD statement was not open, this is a system error.)

BSP—Backspace a Physical Record (BSAM—Magnetic Tape and Direct Access Only)

The BSP macro instruction causes the current volume to be backspaced one data block (physical record). All input and output operations must be tested for completion before the BSP macro instruction is issued. The BSP macro instruction should not be used if the CNTRL, NOTE, or POINT macro instructions are being used.

Any attempt to backspace across a file mark will result in a return code of X'04' and your tape or direct-access volume will not be repositioned. This means you cannot issue a successful BSP macro instruction once your EODAD routine is entered unless you first reposition the tape or direct-access volume into your data set. (CLOSE TYPE=T would get you repositioned at the end of your data set.)

Magnetic Tape: A backspace is always made toward the load point.

Direct-Access Device: A BSP macro instruction must not be issued for a data set created by using track overflow.

SYSIN or SYSOUT Data Sets: A BSP macro instruction is ignored, but a completion code is returned.

The BSP macro instruction is written as follows:

[<i>symbol</i>]	BSP	<i>dcb address</i>
-------------------	------------	--------------------

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the volume to be backspaced. The data set on the volume to be backspaced must be opened before issuing the BSP macro instruction.

Completion Codes

When the system returns control to the problem program, the low-order byte of register 15 contains a *return* code; the lower-order byte of register 0 contains a *reason* code, as follows:

Hexadecimal Codes		
Return (15)	Reason (0)	Meaning
00	00	Successful completion.
04	01	A backspacing request was ignored on a SYSIN or SYSOUT data set for VS2 only. For VS1, this condition results in a return code of 08.
04	02	Backspace not supported for this device type.
04	03	Backspace not successful; insufficient virtual storage was available.
04	04	Backspace not successful; permanent I/O error.
04	05	Backspace into load point or beyond start of data set on the current volume.
08		A backspacing request was ignored on a SYSIN or SYSOUT data set for VS1 only. For VS2, this condition results in a return code of 04.

BUILD—Build a Buffer Pool (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)


The BUILD macro instruction is used to construct a buffer pool in an area provided by the problem program. The buffer pool may be used by more than one data set through separate data control blocks. Individual buffers are obtained from the buffer pool using the GETBUF macro instruction, and buffers are returned to the buffer pool using a FREEBUF macro instruction. Refer to *OS/VS Data Management Services Guide* for an explanation of the interaction of the DCB, BUILD, and GETBUF macro instructions in each access method, as well as the buffer size requirements.

The BUILD macro instruction is written as follows:

[symbol]	BUILD	area address ,{number of buffers,buffer length (0)}
----------	--------------	---

area address—RX-Type Address, (2-12), or (1)

The *area address* operand specifies the address of the area to be used as a buffer pool. The area must start on a fullword boundary. The following illustration shows the format of the buffer pool:

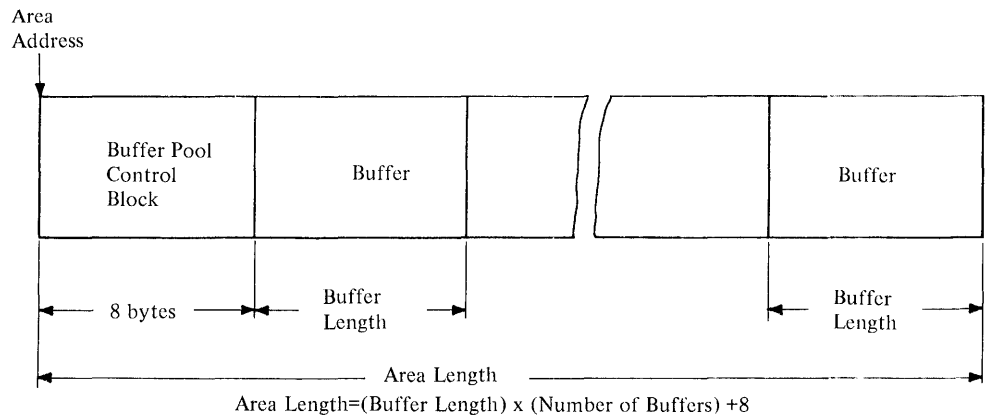

number of buffers—symbol, decimal digit, absexp, or (2-12)

The *number-of-buffers* operand specifies the number of buffers in the buffer pool up to a maximum of 255.

buffer length—symbol, decimal digit, absexp, or (2-12)

The *buffer length* operand specifies the length, in bytes, of each buffer in the buffer pool. The value specified for the buffer length must be a fullword multiple; otherwise the system rounds the value specified to the next higher fullword multiple. The maximum length that can be specified is 32,760 bytes. For QSAM, the buffer length must be at least as large as the value specified in the block size (DCBBLKSI) field of the data control block.

(0)—Coded as shown

The number of buffers and buffer length can be specified in general register 0. If (0) is coded, register 0 must contain the binary values for the number of buffers and buffer length as shown in the following illustration.

Register 0

	Number of Buffers	Buffer Length
Bits:	0 15	16 31

BUILDRCD—Build a Buffer Pool and a Record Area (QSAM)

The BUILDRCD macro instruction causes a buffer pool and a record area to be constructed in a user-provided storage area. This macro is used only for variable-length, spanned records processed in QSAM locate mode. Use of this macro before the data set is opened, or before the end of the DCBEXIT routine, will automatically invoke a logical-record interface rather than a segment interface for variable-length, spanned records.

The standard form of the BUILDRCD macro instruction is written as follows (the list and execute forms are shown following the description of the standard form):

[<i>symbol</i>]	BUILDRCD	<i>area address</i> , <i>number of buffers</i> , <i>buffer length</i> , <i>record area address</i> [, <i>record area length</i>]
-------------------	-----------------	---

area address—A-Type Address or (2-12)

The *area address* operand specifies the address of the area to be used as a buffer pool. The area must start on a fullword boundary.

number of buffers—symbol, decimal digit, absexp, or (2-12)

The *number of buffers* operand specifies the number of buffers, up to a maximum of 255, to be in the buffer pool.

buffer length—symbol, decimal digit, absexp, or (2-12)

The *buffer length* operand specifies the length, in bytes, of each buffer in the buffer pool. The value specified for the buffer length must be a fullword multiple; otherwise, the system rounds the value specified to the next higher fullword multiple. The maximum length that can be specified is 32,760.


record area address—A-Type Address or (2-12)

The *record area address* operand specifies the address of the storage area to be used as a record area. The area must start on a doubleword boundary and have a length of the maximum logical record (LRECL) plus 32 bytes.

record area length—symbol, decimal digit, absexp, or (2-12)

The *record area length* operand specifies the length of the record area to be used. The area must be as long as the maximum length logical record plus 32 bytes for control information. If the record area length operand is omitted, the program must store the record area length in the first four bytes of the record area.

The following illustration shows the format of the buffer pool:

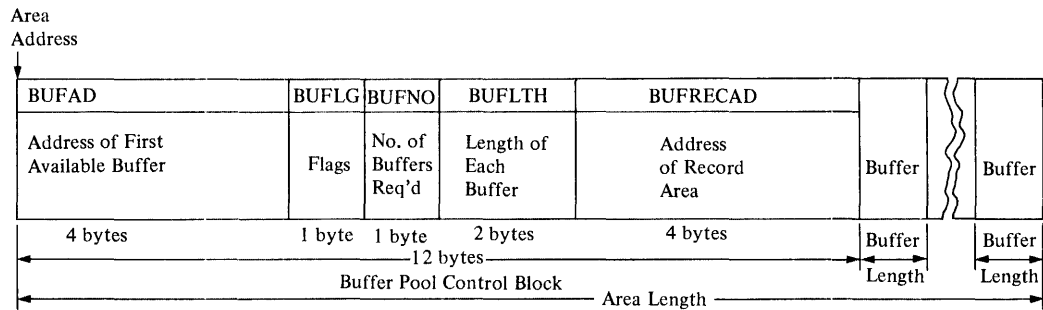

$$\text{Area Length} = (\text{Buffer Length}) \times (\text{Number of Buffers}) + 12$$

BUFLG Flags:

Bit	Meaning
0=1	Record area present
1=1	Buffer control block extended
2-7	Reserved

Notes:

- The buffer control block contains the address of the record area and a flag that indicates logical-record interface processing of variable-length, spanned records.
- It is the user's responsibility to release the buffer pool and the record area after a CLOSE macro instruction has been issued for all the data control blocks using the buffer pool and the record area.

BUILDRCD—List Form

The list form of the BUILDRCD macro instruction is used to construct a program parameter list. The description of the standard form of the BUILDRCD macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates which operands are totally optional and those required in at least one of the pair of list and execute forms. The format description below indicates the optional and required operands in the list form only.

The list form of the BUILDRCD macro instruction is written as follows:

<i>[symbol]</i>	BUILDRCD	<i>area address</i> <i>,number of buffers</i> <i>,buffer length</i> <i>,record area address</i> <i>[,record area length]</i> ,MF=L
-----------------	-----------------	--

area address—A-Type Address

number of buffers—symbol, decimal digit, or absexp

buffer length—symbol, decimal digit, or absexp

record area address—A-Type Address

record area length—symbol, decimal digit, or absexp

MF=L—Coded as shown

The **MF=L** operand specifies that the BUILDRCD macro instruction is used to create a control program parameter list that will be referenced by an execute form instruction.

Note: A control program parameter list can be constructed by coding only the **MF=L** operand (without the preceding comma); in this case, the list is constructed for the *area address*, *number of buffers*, *buffer length*, and *record area address* operands. If the *record area length* operand is also required, the operands can be coded as follows:

[symbol] **BUILDRCD ,,,,0,MF=L**

The preceding example shows the coding to construct a list containing address constants with a value of 0 in each constant. The actual values can then be supplied by the execute form of the BUILDRCD macro instruction.

BUILDRCD—Execute Form

A remote control program parameter list is referred to, and can be modified by, the execute form of the BUILDRCD macro instruction. The description of the standard form of the BUILDRCD macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates which operands are totally optional and those required in at least one of the pair of list and execute forms. The format description below indicates the optional and required operands for the execute form only.

The execute form of the BUILDRCD macro instruction is written as follows:

[<i>symbol</i>]	BUILDRCD	[<i>area address</i>] ,[<i>number of buffers</i>] ,[<i>buffer length</i>] ,[<i>record area address</i>] ,[<i>record area length</i>] ,MF=(E,{ <i>control program list address</i> (1)})
-------------------	-----------------	---

area address—RX-Type Address or (2-12)

number of buffers—absexp

buffer length—absexp

record area address—RX-Type Address or (2-12)

record area length—absexp

MF=(E,{*control program list address* |(1)})

This operand specifies that the execute form of the BUILDRCD macro instruction is used, and an existing control program parameter list (created by a list-form instruction) will be used. The MF= operand is coded as described in the following:

E—Coded as shown

control program list address—RX-Type Address, (2-12), or (1)

CHECK—Wait for and Test Completion of a Read or Write Operation (BDAM, BISAM, BPAM, and BSAM)

The CHECK macro instruction causes the active task to be placed in the wait condition, if necessary, until the associated input or output operation is completed. The input or output operation is then tested for errors and exceptional conditions. If the operation is completed successfully, control is returned to the instruction following the CHECK macro instruction. If the operation is not completed successfully, the error analysis (SYNAD) routine is given control or, if no error analysis routine is provided, the task is abnormally terminated. The error analysis routine is discussed in the SYNAD operand of the DCB macro instruction.

The following conditions are also handled for BPAM and BSAM only:

When Reading: The end-of-data (EODAD) routine is given control if an input request is made after all the records have been retrieved. Volume switching is automatic for a BSAM data set that is not opened for UPDAT. For a BSAM data set that is opened for update, the end-of-data routine is entered at the end of each volume.

When Writing: Additional space on the device is obtained when the current space is filled and more WRITE macro instructions have been issued.

For BPAM and BSAM, a CHECK macro instruction must be issued for each input and output operation, and must be issued in the same order as the READ or WRITE macro instructions were issued for the data set. For BDAM or BISAM, either a CHECK or WAIT macro instruction can be used.

If the ASCII translation routines are included when the operating system is generated, translation can be requested by coding LABEL=(,AL) or (,AUL) in the DD statement, or it can be requested by coding OPTCD=Q in the DCB macro instruction or DCB subparameter of the DD statement. If translation is requested, the Check routine automatically translates BSAM records, as they are read, from ASCII code to EBCDIC code, provided that the record format is F, FB, D, DB, or U. Translation occurs as soon as the Check routine determines that the input buffer is full. For translation to occur correctly, all input data must be in ASCII code.

The CHECK macro instruction is written as follows:

[symbol]	CHECK	<i>decb address</i> [,DSORG={IS ALL}]
----------	-------	--

decb address—RX-Type Address, (2-12), or (1)

The *decb address* operand specifies the address of the data event control block created by the associated READ or WRITE macro instruction or used by the associated input or output operation.

DSORG={IS | ALL}

The **DSORG** operand specifies the type of data set organization. The following describes the characters that can be coded:

IS

Specifies that the program generated is for BISAM use only.

ALL

Specifies that the program generated is for BDAM, BISAM, BPAM, or BSAM use.

If the **DSORG** operand is omitted, the program generated is for BDAM, BPAM, or BSAM use only.

CHKPT—Take a Checkpoint for Restart Within a Job Step (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)

The CHKPT macro instruction establishes a checkpoint for the job step. If the step terminates abnormally, it is automatically restarted from the checkpoint. On restart, execution resumes with the instruction that follows the CHKPT instruction. If the step again terminates abnormally (before taking another checkpoint), it is again restarted from the checkpoint. When several checkpoints are taken, the step is automatically restarted from the most recent checkpoint.

Automatic restart from a checkpoint is suppressed if:

1. The job step completion code is not one of a set of codes specified at system generation.
2. The operator does not authorize the restart.
3. The restart definition parameter of the JOB or EXEC statement specifies no restart (RD=NR) or no checkpoint (RD=NC or RD=RNC).
4. The CANCEL operand appears in the last CHKPT macro instruction issued before abnormal termination.

Under any of these conditions, automatic checkpoint restart does not occur. Automatic step restart (restart from the beginning of the job step) can occur, except under condition 1 or 2, or when the job step was restarted from a checkpoint prior to abnormal termination. Automatic step restart is requested through the restart definition parameter of the JOB or EXEC statement (RD=R or RD=RNC).

When automatic restart is suppressed or unsuccessful, a deferred restart can be requested by submitting a new job. The new job can specify restart from the beginning of the job step or from any checkpoint for which there is an entry in the checkpoint data set.

The checkpoint data set contains the information necessary to restart the job step from a checkpoint. The control program records this information when the CHKPT macro instruction is issued. The macro refers to the data control block for the data set, which must be on a magnetic tape or direct-access volume. A tape can have standard labels, nonstandard labels, or no labels.

If the checkpoint data set is not open when CHKPT is issued, the control program opens the data set and then closes it after writing the checkpoint entry. If the data set is physically sequential and is opened by the control program, the checkpoint entry is written over the previous entry in the data set, unless the DD statement specifies DISP=MOD. By writing entries alternately into two checkpoint data sets, it is possible to keep the entries for the two most recent checkpoints while deleting those for earlier checkpoints.

The data control block for the checkpoint data set must specify:

DSORG=PS or PO, RECFM=U or UT, MACRF=(W), BLKSIZE= *nnn*, and DDNAME= *any name*

where *nnn* is at least 600 bytes, but not more than 32,760 bytes for magnetic tape and not more than the track length for direct access. (If the data set is opened by the control program, block size need not be specified; the device-determined maximum block size is assumed if no block size is specified.) For seven-track tape, the data control block must specify TRTCH=C; for direct access, it must specify or imply KEYLEN=0. To request chained scheduling, OPTCD=C and NCP=2 must be specified. With direct access,

OPTCD=W can be specified to request validity checking for write operations, and OPTCD=WC can be specified to combine validity checking and chained scheduling.

The standard form of the CHKPT macro instruction is written as follows (information about the list and execute forms follows this description):

[<i>symbol</i>]	CHKPT	$\left\{ \begin{array}{l} dcbaddr [, checkid\ addr [, checkid\ length [, 'S']] \\ \text{CANCEL} \end{array} \right\}$
-------------------	--------------	---

dcbaddr

The *dcb address* operand specifies the address of the data control block for the checkpoint data set.

checkid address

The *checkid address* operand specifies the address of the checkpoint identification field. The contents of the field are used when the job step is to be restarted from the checkpoint. They are used by the control program in requesting operator authorization for automatic restart. You can use it for requesting deferred restart.

If the next operand specifies the length of the field (*checkid length*), or if it is omitted to imply a length of eight bytes, the field must contain the checkpoint identification when the CHKPT macro instruction is issued. If the next operand is written as 'S', the identification is generated and placed in the field by the control program. If both operands are omitted, the control program generates the identification, but does not make it available to the problem program. In each case, the identification is written in a message to the operator.

The control program writes the checkpoint identification as part of the entry in the checkpoint data set. For a sequential data set, the identification can be any combination of up to 16 letters, digits, printable special characters, and blanks. For a partitioned data set, it must be a valid member name of up to 8 letters and digits, starting with a letter. The identification for each checkpoint should be unique.

If the control program generates the identification, the identification is 8 bytes in length. It consists of the letter C followed by a 7-digit decimal number. The number is the total number of checkpoints taken by the job, including the current checkpoint, checkpoints taken earlier in the job step, and checkpoints taken by any previous job steps.

checkid length

The *checkid length* operand specifies the length in bytes of the checkpoint identification field. The maximum length is 16 bytes if the checkpoint data set is physically sequential, 8 bytes if it is partitioned. For a partitioned data set, the field can be longer than the actual identification, if the unused portion is blank. If the operand is omitted, the implied length is 8 bytes.

If you code 'S' the control program supplies the checkpoint identification. The implied field length is 8 bytes.

CANCEL

The **CANCEL** operand cancels the request for automatic restart from the most recent checkpoint. If another checkpoint is taken before abnormal termination, the job step can be restarted at that checkpoint.

When control is returned, register 15 contains one of the following return codes:

Hexadecimal Meaning

Code	
00	<i>Successful completion.</i> Code 00 is also returned if the RD parameter was coded as RD=NC or RD=RNC to totally suppress the function of CHKPT.
04	<i>Restart has occurred</i> at the checkpoint taken by the CHKPT macro instruction during the original execution of the job. A request for another restart of the same checkpoint is normally in effect. If a deferred restart was performed and RD=NC, NR, or RNC was specified in the resubmitted deck, a request for another restart is not in effect.
08	<i>Unsuccessful completion.</i> A checkpoint entry was not written, and a restart from this checkpoint was not requested. A request for an automatic restart from a previous checkpoint remains in effect. One of the following conditions exists: <ul style="list-style-type: none">• The parameters passed by the CHKPT macro instruction are invalid.• The CHKPT macro instruction was executed in an exit routine other than the end-of-volume exit routine.• A STIMER macro instruction has been issued, and the time interval has not been completed.• A WTOR macro instruction has been issued, and the reply has not been received.• The checkpoint data set is on a direct-access volume and is full. Secondary space allocation was requested and performed. (Secondary space allocation is performed for a checkpoint data set, but the allocated space is not used. However, had secondary allocation not been requested, the job step would have been abnormally terminated.)• A graphics-type DSORG has been found in an open DCB. Graphic devices are not supported in checkpoint/restart.• The job step contains more than one task.
0C	<i>Unsuccessful completion.</i> An uncorrectable error occurred in writing the checkpoint entry or in completing queued access method input/output operations that were begun before the CHKPT macro instruction was issued. A partial, invalid checkpoint entry may have been written. If the entry has a programmer-specified <i>checkid</i> , and the checkpoint data set is sequential, a different <i>checkid</i> should be specified the next time CHKPT is executed. If the data set is partitioned, a different <i>checkid</i> need not be specified. This code is also returned if the checkpoint routine tries to open the checkpoint data set and the DD statement for the data set is missing.
10	<i>Successful completion with possible error condition.</i> The task has control, by means of an explicit or implied use of the ENQ macro instruction, of a serially reusable resource; if the task terminates abnormally, it will not have control of the resource when the job step is restarted. The user's program must, therefore, reissue the ENQ macro instruction.
14	<i>Checkpoint not taken.</i> End of volume occurred while writing the checkpoint entry on a tape data set. The checkpoint was canceled, but processing of the user's program continues.

When one of the errors indicated by code 08, 0C, 10, or 14 occurs, the system prints an error message on the operator's console. The message indicating code 08 or 0C contains a code that further identifies the error. The operator should report the message contents to the programmer.

Note: Successful use of the CHKPT macro instruction requires some care in the selection of checkpoints. For a detailed discussion of checkpoint requirements, refer to *OS/VS Checkpoint/Restart*.



CHKPT—List Form

The list form of the CHKPT instruction is used to construct a control program parameter list.

The description of the standard form of the CHKPT macro provides the explanation of the function of each operand. The description of the standard form also indicates which operands are optional and which are required in at least one of the list and execute forms. The format description below indicates the optional and required operands in the list form only. Note that the CANCEL operand, which can be coded in the standard form, cannot be coded in the list form.

The list form of the CHKPT macro instruction is written as follows:

[<i>symbol</i>]	CHKPT	[<i>dcb address</i>] ,[<i>checkid address</i>] ,[<i>checkid length</i> 'S'] , MF=L
-------------------	--------------	---

address

The *address* operand specifies any address that may be written in an A-type address constant.

length

The *length* operand specifies any absolute expression that is valid in the assembler language.

MF=L

The **MF=L** operand indicates the list form of the CHKPT macro instruction.

CHKPT—Execute Form

A control program parameter list is referred to, and can be modified by, the execute form of the CHKPT macro.

The description of the standard form of the CHKPT macro provides the explanation of the function of each operand. The description of the standard form also indicates which operands are optional and which are required in at least one of the list and execute forms. The format description below indicates the optional and required operands for the execute form only. Note that the CANCEL operand, which can be coded in the standard form, cannot be coded in the execute form.

The execute form of the CHKPT macro instruction is written as follows:

[<i>symbol</i>]	CHKPT	[<i>dcb address</i>] ,[<i>checkid address</i>] ,[<i>checkid length</i> 'S'] ,MF=(E,{ <i>control program list address</i> (1)})
-------------------	--------------	--

address

The *address* operand specifies any address that is valid in an RX-type instruction, or one of the general registers 2 through 12, previously loaded with the indicated address. You may designate the register symbolically or with an absolute expression; always code it in parentheses.

length

The *length* operand specifies any absolute expression that is valid in assembler language, or one of the general registers 2 through 12, previously loaded with the indicated value. You may designate the register symbolically or with an absolute expression; always code it in parentheses.

MF=(E,{*control program list address* | (1)})

This operand specifies the execute form of the macro instruction using a control program parameter list. The address of the control program parameter list can be coded as described under *address*, or can be loaded into register 1, in which case code MF=(E,(1)).

CLOSE—Logically Disconnect a Data Set (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)

The CLOSE macro instruction causes output data set labels to be created, and volumes to be positioned as specified by the user. The fields of the data control block are restored to the condition that existed before the OPEN macro instruction was issued, and the data set is disconnected from the processing program. Final volume positioning for the current volume can be specified to override the positioning implied by the DD control statement DISP parameter. Any number of *dcb address* operands and associated options may be specified in the CLOSE macro instruction.

Associated data sets for a 3525 card punch can be closed in any sequence, but if one data set is closed, I/O operations cannot be initiated for any of its associated data sets. Additional information about closing associated data sets is contained in *OS/VS Data Management Services Guide*.

A FREEPool macro instruction should normally follow a CLOSE macro instruction (without TYPE=T) to regain the buffer pool storage space and to allow a new buffer pool to be built if the DCB is reopened with different record size attributes.

A special operand, TYPE=T, is provided for processing with BSAM.

The standard form of the CLOSE macro instruction is written as follows (the list and execute forms are shown following the description of the standard form):

[<i>symbol</i>]	CLOSE	(<i>dcb address</i> , [<i>option</i>], ...) [,TYPE=T]
-------------------	-------	---

dcb address—A-Type Address or (2-12)

The *dcb address* operand specifies the address of the data control block for the opened data set that is to be closed.

option

One of these options indicate the volume positioning that is to occur when the data set is closed. The *option* operand is ignored for ISAM, BDAM, SYSIN, and SYSOUT data sets and also for data sets on other than magnetic tape or direct-access devices. If the option specified is FREE, this operand is not ignored for BDAM, SYSIN, and SYSOUT data sets. The options are:

REREAD

Specifies that the current volume is to be positioned to reprocess the data set. If processing was forward, the volume is positioned to the beginning of the data set; if processing was backwards (RDBACK), the volume is positioned to the end of the data set.

LEAVE

Specifies that the current volume is to be positioned to the logical end of the data set. If processing was forward, the volume is positioned to the end of the data set; if processing was backwards (RDBACK), the volume is positioned to the beginning of the data set.

REWIND

Specifies that the current magnetic tape volume is to be positioned at the load point, regardless of the direction of processing. REWIND cannot be specified when TYPE=T is specified. In VS2 systems, if FREE=CLOSE has been coded on the DD statement associated with the data set being closed, coding the REWIND option will result in the data set being freed at the time it is closed rather than at the termination of the job step.

FREE

For VS2 systems only, specifies that the current data set is to be freed at the time the data set is closed, rather than at the time the task is terminated. For tape data sets, this means that the volume is eligible for use by other tasks or to be demounted. Direct-access volumes may also be freed for use by other tasks. They may be freed for demounting if (1) no other data sets on the volume are open and (2) the volume is otherwise demountable. Do not use this option with **CLOSE TYPE=T**.

DISP

Specifies that a tape volume is to be disposed of in the manner implied by the DD statement associated with the data set. Direct-access volume positioning and disposition are not affected by this parameter of the **CLOSE** macro instruction. There are several dispositions that can be specified in the **DISP** parameter of the DD statement; **DISP** can be **PASS**, **DELETE**, **KEEP**, **CATLG**, or **UNCATLG**.

VS1 Systems: Depending on how the **DISP** option is coded in the DD statement, the current magnetic tape volume will be positioned as follows:

DISP Parameter	Action
PASS	Forward space to the end of data set on the current volume.
DELETE	Rewind the current volume.
KEEP, CATLG, or UNCATLG	Rewind and unload the current volume.

VS2 Systems: Depending on how the **DISP** option is coded in the DD statement, the current magnetic tape volume will be positioned as follows:

DISP Parameter	Action
PASS	Forward space to the end of the data set on the current volume.
DELETE	Rewind the current volume.
KEEP, CATLG, or UNCATLG	The volume is positioned the same as for CLOSE REREAD . Note that the volume is not rewound and unloaded.

In VS2 systems, if **FREE=CLOSE** has been coded in the DD statement associated with this data set, coding the **DISP** option in the **CLOSE** macro will result in the data set being freed when the data set is closed, rather than at the time the job step is terminated.

Note: When the *option* operand is omitted, **DISP** is assumed. For **TYPE=T**, this is processed as **LEAVE** during execution.

The **LEAVE** and **REREAD** options are meaningless except for magnetic tape and **CLOSE TYPE=T**.

TYPE=T—Coded as shown

You can code **CLOSE TYPE=T** and temporarily close sequential data sets on magnetic tape and direct-access volumes processed with **BSAM**. When you use **TYPE=T**, the DCB used to process the data set maintains its open status, and you don't have to issue another **OPEN** macro instruction to continue processing the same data set. This option cannot be used in a **SYNAD** routine nor can it be used in conjunction with the **FREE** option.

A request to temporarily close a data set causes the system control program to process labels, modify some of the fields in the system control blocks for that data set, and reposition the volume (or *current* volume in the case of multivolume data sets) in much the same way that the normal **CLOSE** macro does. When you code **TYPE=T**, you can specify that the volume either be positioned at the end of data (the **LEAVE**

option) or be repositioned at the beginning of data (the **REREAD** option). Magnetic-tape volumes are repositioned either immediately before the first data record or immediately after the last data record; the presence of tape labels has no effect on repositioning.

| If you code the release (**RLSE**) operand on the **DD** statement for an output data set, it is ignored by temporary close (**CLOSE TYPE=T**), but any unused space will be released when you finally issue the normal **CLOSE** (without **TYPE=T**) macro instruction.

Refer to *OS/VS Data Management Services Guide* for additional information and coding restrictions.

CLOSE—List Form

The list form of the CLOSE macro instruction is used to construct a data management parameter list. Any number of operands (data control block addresses and associated options) can be specified.

The list consists of a one-word entry for each DCB in the parameter list; the high-order byte is used for the options and the three low-order bytes are used for the DCB address. The end of the list is indicated by a one in the high-order bit of the last entry's option byte. The length of a list generated by a list-form instruction must be equal to the maximum length required by an execute-form instruction that refers to the same list. A maximum length list can be constructed by one of two methods:

- Code a list-form instruction with the maximum number of parameters that are required by an execute-form instruction that refers to the list.
- Code a maximum length list by using commas in a list-form instruction to acquire a list of the appropriate size. For example, coding CLOSE (,,,,,,),MF=L would provide a list of five fullwords (five dcb addresses and five options).

Entries at the end of the list that are not referenced by the execute-form instruction are assumed to have been filled in when the list was constructed or by a previous execute-form instruction. Before using the execute-form instruction, you may shorten the list by placing a one in the high-order bit of the last DCB entry to be processed.

A zeroed work area on a word boundary is equivalent to CLOSE (,DISP,...),MF=L and can be used in place of a list-form instruction. The high-order bit of the last DCB entry must contain a one before this list can be used with the execute-form instruction.

A parameter list constructed by a CLOSE macro instruction, list form, can be referred to by either an OPEN or CLOSE execute-form instruction.

The description of the standard form of the CLOSE macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates which operands are completely optional and those required in at least one of the pair of list and execute forms. The format description below indicates the optional and required operands in the list form only.

The list form of the CLOSE macro instruction is written as follows:

[<i>symbol</i>]	CLOSE	([<i>dcb address</i>], [<i>option</i>], ...) [,TYPE=T] ,MF=L
-------------------	-------	--

dcb address—A-Type Address

option—Same as standard form

TYPE=T—Coded as shown

The TYPE=T operand can be coded in the list-form instruction to allow the specified option to be checked for validity when the program is assembled.

MF=L—Coded as shown

The MF=L operand specifies that the CLOSE macro instruction is used to create a data management parameter list that will be referred to by an execute-form instruction.

CLOSE—Execute Form

A remote data management parameter list is used in and can be modified by the execute form of the CLOSE macro instruction. The parameter list can be generated by the list form of either an OPEN macro instruction or a CLOSE macro instruction.

The description of the standard form of the CLOSE macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates which operands are totally optional and those required in at least one of the pair of list and execute forms. The format description below indicates the optional and required operands in the execute form only.

The execute form of the CLOSE macro instruction is written as follows:

[<i>symbol</i>]	CLOSE	[[<i>dcb address</i>], <i>option</i>], ...] [, TYPE=T] , MF=(E, { <i>data management list address</i> (1)}
-------------------	--------------	--

dcb address—RX-Type Address or (2-12)

option—Same as standard form

TYPE=T—Same as standard form

MF=(E,{ *data management list address* | (1)}

This operand specifies that the execute form of the CLOSE macro instruction is being used, and an existing data management parameter list (created by a list-form instruction) will be used. The **MF=** operand is coded as described in the following:

E—Coded as shown

data management list address—RX-Type Address, (2-12), or (1)

CNTRL—Control Online Input/Output Device (BSAM and QSAM)

The CNTRL macro instruction is used to control magnetic tape drives (BSAM only for a data set that is not open for output), online card readers, 3525 card punches (read and print features, VS2 only), printers (BSAM and QSAM), the 3886 Optical Character Reader (BSAM only), and the 3890 Document Processor (QSAM only). For information on additional operands for the CNTRL macro instruction for the 3886 and 3890, see *OS/VS IBM 3886 Optical Character Reader Model 1 Reference* and *IBM 3890 Document Processor Machine and Programming Description*.

For information on additional operands for the CNTRL macro for the 1275 or 1419, see *OS Data Management Services and Macro Instructions for IBM 1419/1275*.

The MACRF operand of the DCB macro instruction must specify a C. The CNTRL macro instruction is ignored for SYSIN or SYSOUT data sets. For BSAM, all input and output operations must be tested for completion before the CNTRL macro instruction is issued. The control facilities available are as follows:

Card Reader: Provides stacker selection, as follows:

QSAM—The CNTRL macro instruction is issued whenever it is necessary to read a new card. For unblocked records, a CNTRL macro instruction should be issued after every input request. For blocked records, a CNTRL macro instruction is issued after the last logical record on each card that is retrieved. The move mode of the GET macro instruction must be used, and the number of buffers (BUFNO field of the DCB) must be one.

BSAM—The CNTRL macro instruction should be issued after every input request.

Printer: Provides line spacing or a skip to a specific carriage control channel. A CNTRL macro instruction cannot be used if carriage control characters are provided in the record. If the printer contains the universal character set feature, data checks should be blocked (OPTCD=U should not appear in the data control block).

Magnetic Tape: Provides method of forward spacing and backspacing (BSAM only for a data set that is not open for output). If OPTCD=H is indicated in the data control block, the CNTRL macro instruction can be used to perform record positioning on DOS tapes that contain embedded checkpoint records. Embedded checkpoint records encountered during the record positioning are bypassed and are not counted as blocks spaced over. OPTCD=H must be specified in a job control language DD statement. The CNTRL macro instruction cannot be used to backspace DOS 7-track tapes that are written in data convert mode that contain embedded checkpoint records (BSAM).

Note: The CNTRL macro should not be used with output operations on BSAM tape data sets.

3525 Printing: Provides line spacing or a skip to a specific printing line on the card. The card contains 25 printing lines; the odd numbered lines 1 through 23 correspond to the printer skip channels 1 through 12 (see the SK operand). For additional information about 3525 printing operations, refer to *OS and OS/VS Programming Support for the IBM 3505 Card Reader and IBM 3525 Card Punch*.

The CNTRL macro instruction is written as follows:

[<i>symbol</i>]	CNTRL	<i>dcb address</i> ,SS,{1 2} ,SP,{1 2 3} ,SK,{1 2 ... 11 12} ,BSM ,FSM ,BSR[, <i>number of blocks</i>] ,FSR[, <i>number of blocks</i>]
-------------------	-------	---

dcb address

The *dcb address* operand specifies the address of the data control block for the data set opened for the online device.

SS,{1 | 2}

The **SS** operand is coded as shown to indicate that the control function requested is stacker selection on a card reader; either 1 or 2 must be coded to indicate which stacker is to be selected.

SP,{1 | 2 | 3}

The **SP** operand is coded as shown to indicate that the control function requested is printer line spacing or 3525 card punch line spacing; either 1, 2, or 3 must be coded to indicate the number of spaces for each print line.

SK,{1 | 2 | ... | 11 | 12}

The **SK** operand is coded as shown to indicate that the control function requested is a skip operation on the printer or 3525 card punch, print feature; a number (1 through 12) must be coded to indicate the channel or print line to which the skip is to be taken.

BSM—Coded as shown

The **BSM** operand indicates that the control function requested is to backspace the magnetic tape past a tapemark, then forward space over the tapemark. When this operand is specified, the DCBBLKCT field in the data control block is set to zero.

FSM—Coded as shown

The **FSM** operand indicates that the control function requested is to forward space the magnetic tape over a tapemark, then backspace past the tapemark. When this operand is specified, the DCBBLKCT field in the data control block is set to zero.

BSR—Coded as shown

The **BSR** operand indicates that the control function requested is to backspace the magnetic tape the number of blocks indicated in the *number-of-blocks* operand.

FSR—Coded as shown

The **FSR** operand indicates that the control function requested is to forward space the magnetic tape the number of blocks indicated in the *number-of-blocks* operand.

number of blocks—symbol, decimal digit, absexp, or (2-12)

The *number-of-blocks* operand specifies the number of blocks to backspace (see **BSR** operand) or forward space (see **FSR** operand) the magnetic tape. The maximum value that can be specified is 32,767. If the *number-of-blocks* operand is omitted, one is assumed.

If the forward space or backspace operation is not completed successfully, control is passed to the error analysis (SYNAD) routine; if no SYNAD routine is designated, the task is abnormally terminated. Register contents, when control is passed to the error analysis routine, are shown in Appendix A. If a tapemark is encountered for **BSR** or **FSR**, control is returned to the processing program, and register 15 contains a count of the uncompleted forward spaces or backspaces. If the operation is completed normally, register 15 contains the value zero.

DCB—Construct a Data Control Block (BDAM)

The data control block for a basic direct access method (BDAM) data set is constructed during assembly of the problem program. The DCB macro instruction must not be coded within the first 16 bytes of addressability for the control section (CSECT). The **DSORG** and **MACRF** operands must be coded in the DCB macro instruction, but the other operands can be supplied from other sources. Each of the BDAM DCB operand descriptions contains a heading, "Source." The information under this heading describes the sources from which an operand can be supplied to the data control block.

Before a DCB macro instruction for a BDAM data set is coded, the following characteristics of direct data sets should be considered:

- The problem program must synchronize I/O operations by issuing a **CHECK** or **WAIT** macro instruction to test for completion of read and write operations.
- A BDAM data set is created using the basic sequential access method (BSAM). A special operand (**MACRF=WL**) specifies that BSAM is being used to create a BDAM data set. Operand descriptions for the BDAM DCB macro instruction include information about both creating and processing a BDAM data set.
- Although a BDAM data set can contain blocked records, the problem program must perform all blocking and deblocking of records. BDAM provides only the capability to read or write a data block, but the data block can contain multiple logical records assembled by the problem program.
- When a BDAM data set is being created, buffers can be acquired automatically, but buffer control must be provided by the problem program. The problem program must place data in the output buffer before issuing a **WRITE** macro instruction to write the data block.
- When a BDAM data set is being processed, the problem program can control all buffering, or dynamic buffering can be specified in the DCB macro instruction and subsequently requested in a **READ** macro instruction.
- The actual organization of a direct data set is determined by the programmer to meet the needs of the application. The data set can be processed by using one of the following addressing methods:
 - Actual device addresses (in the form **MBBCCHHR**).
 - Relative track addresses (in the form **TTR**). These addresses specify a track (and a record on the track) of the direct-access device relative to the beginning of the data set.
 - Relative block addresses can be used with fixed-length records. These addresses specify a data block relative to the beginning of the data set.

For additional information about the characteristics of BDAM data sets, refer to *OS/VS Data Management Services Guide*.

The DCB macro for BDAM is written as follows:

[<i>symbol</i>]	DCB	<pre> [BFALN={F D}] [BFTEK=R] [BLKSIZE= <i>absexp</i>] [BUFCB= <i>relexp</i>] [BUFL= <i>absexp</i>] [BUFNO= <i>absexp</i>] [DDNAME= <i>symbol</i>]¹ DSORG={DA DAU} [EXLST= <i>relexp</i>] [KEYLEN= <i>absexp</i>] [LIMCT= <i>absexp</i>] MACRF= {(R{K[I] I}{X}[S][C])} {(W{A[K][I] K[I] I}{C})} {(R{K[I] I}{X}[S][C],W{A[K][I] K[I] I}{C})} [OPTCD=[R A][E][F][W]] [RECFM={U V[S BS] F[T]}] [SYNAD= <i>relexp</i>] </pre>
-------------------	-----	---

¹This parameter must be supplied before an OPEN macro is issued for this DCB; it cannot be supplied in the open exit routine.

The following describes the DCB operands that can be specified for creating and processing a BDAM data set:

BFALN={F | D}

The **BFALN** operand specifies the boundary alignment for each buffer in the buffer pool. The **BFALN** operand can be specified when (1) BSAM is being used to create a BDAM data set and buffers are acquired automatically, (2) when an existing BDAM data set is being processed and dynamic buffering is requested, or (3) when the GETPOOL macro instruction is used to construct the buffer pool. If the **BFALN** operand is omitted, the system provides doubleword alignment for each buffer. The following describes the characters that can be specified:

F

Specifies that each buffer is aligned on a fullword boundary that is not also a doubleword boundary.

D

Specifies that each buffer is aligned on a doubleword boundary.

If the BUILD macro instruction is used to construct the buffer pool or if the problem program controls all buffering, the problem program must provide the area for the buffers and control buffer alignment.

Source: The **BFALN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. If both the **BFALN** and **BFTEK** operands are specified, they must be supplied from the same source.

BFTEK=R

The **BFTEK** operand specifies that the data set is being created for or contains variable-length spanned records. The **BFTEK** operand can be coded only when the record format is specified as **RECFM=VS**.

When variable-length spanned records are written, the data length can exceed the total capacity of a single track on the direct-access device being used, or it can exceed

the remaining capacity on a given track. The system divides the data block into segments (if necessary), writes the first segment on a track, and writes the remaining segment(s) on the following track(s).

When a variable-length spanned record is read, the system reads each segment and assembles a complete data block in the buffer designated in the area address operand of a READ macro instruction.

Note: Variable-length spanned records can also be read using BSAM. When BSAM is used to read a BDAM variable-length spanned record, the record is read one segment at a time, and the problem program must assemble the segments into a complete data block. This operation is described in the section for the BSAM DCB macro instruction.

Source: The **BFTEK** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. If both the **BFTEK** and **BFALN** operands are specified, they must be supplied from the same source.

BLKSIZE=*absexp* (maximum value is 32,760)

The **BLKSIZE** operand specifies the length, in bytes, of each data block for fixed-length records, or it specifies the maximum length, in bytes, of each data block for variable-length or undefined-length records. If keys are used, the length of the key is not included in the value specified for the **BLKSIZE** operand.

The actual value that can be specified in the **BLKSIZE** operand depends on the record format and the type of direct-access device being used. If the track-overflow feature is being used or if variable-length spanned records are being used, the value specified in the **BLKSIZE** operand can be up to the maximum. For all other record formats (F, V, VBS, and U), the maximum value that can be specified in the **BLKSIZE** operand is determined by the track capacity of a single track on the direct-access device being used. Device capacity for direct-access devices is described in Appendix C of this publication. For additional information about device capacity and space allocation, refer to *OS/VS Data Management Services Guide*.

Source: The **BLKSIZE** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

BUFCB=*relexp*

The **BUFCB** operand specifies the address of the buffer pool control block when the buffer pool is constructed by a BUILD macro instruction.

If the buffer pool is constructed automatically, dynamically, or by a GETPOOL macro instruction, the system places the address of the buffer pool control block into the data control block, and the **BUFCB** operand is not required. The **BUFCB** operand is not required if the problem program controls all buffering.

Source: The **BUFCB** operand can be supplied in the DCB macro instruction or by the problem program before completion of the data control block exit routine.

BUFL=*absexp* (maximum value is 32,760)

The **BUFL** operand specifies the length, in bytes, of each buffer in the buffer pool when the buffers are acquired automatically (create BDAM) or dynamically (existing BDAM).

When buffers are acquired automatically (create BDAM), the **BUFL** operand is optional; if specified, the value must be at least as large as the sum of the values specified for the **KEYLEN** and **BLKSIZE** operands. If the **BUFL** operand is omitted, the system constructs buffers with a length equal to the sum of the values specified in the **KEYLEN** and **BLKSIZE** operands.

The **BUFL** operand must be specified when an existing BDAM data set is being processed and dynamic buffering is requested. Its value must be at least as large as the value specified for the **BLKSIZE** operand when the **READ** or **WRITE** macro instruction specifies a key address, or the value specified in the **BUFL** operand must be at least as large as the sum of the values specified in the **KEYLEN** and **BLKSIZE** operands if the **READ** and **WRITE** macro instructions specify 'S' for the key address.

The **BUFL** operand can be omitted if the buffer pool is constructed by a **BUILD** or **GETPOOL** macro instruction or if the problem program controls all buffering.

Source: The **BUFL** operand can be supplied in the **DCB** macro instruction, in the **DCB** subparameter of a **DD** statement, or by the problem program before completion of the data control block exit routine.

BUFNO=*absexp* (maximum value is 255)

The **BUFNO** operand specifies the number of buffers to be constructed by a **BUILD** macro instruction, or it specifies the number of buffers and/or segment work areas to be acquired by the system.

If the buffer pool is constructed by a **BUILD** macro instruction or if buffers are acquired automatically when **BSAM** is used to create a BDAM data set, the number of buffers must be specified in the **BUFNO** operand.

If dynamic buffering is requested when an existing BDAM data set is being processed, the **BUFNO** operand is optional; if omitted, the system acquires two buffers.

If variable-length spanned records are being processed and dynamic buffering is requested, the system also acquires a segment work area for each buffer. If dynamic buffering is not requested, the system acquires the number of segment work areas specified in the **BUFNO** operand. If the **BUFNO** operand is omitted when variable-length spanned records are being processed and dynamic buffering is not requested, the system acquires two segment work areas.

If the buffer pool is constructed by a **GETPOOL** macro instruction or if the problem program controls all buffering, the **BUFNO** operand can be omitted, unless it is required to acquire additional segment work areas for variable-length spanned records.

Source: The **BUFNO** operand can be supplied in the **DCB** macro instruction, in the **DCB** subparameter of a **DD** statement, or by the problem program before completion of the data control block exit routine.

DDNAME=*symbol*

The **DDNAME** operand specifies the name used to identify the job control language data definition (**DD**) statement that defines the data set being created or processed.

Source: The **DDNAME** operand can be supplied in the **DCB** macro instruction or by the problem program before an **OPEN** macro instruction is issued to open the data set.

DSORG={**DA** | **DAU**}

The **DSORG** operand specifies the data set organization and if the data set contains any location-dependent information that would make it unmovable. For example, if actual device addresses are used to process a BDAM data set, the data set may be unmovable. The following describes the characters that can be specified:

DA

Specifies a direct organization data set.

DAU

Specifies a direct organization data set that contains location-dependent information.

When a BDAM data set is created, the basic sequential access method (BSAM) is used. The **DSORG** operand in the DCB macro instruction must be coded as **DSORG=PS** or **PSU** when the data set is created, and the DCB subparameter in the corresponding DD statement must be coded as **DSORG=DA** or **DAU**. This creates a data set with a data set label identifying it as a BDAM data set.

Source: The **DSORG** operand must be specified in the DCB macro instruction. See the above comment about creating a BDAM data set.

EXLST=*relexp*

The **EXLST** operand specifies the address of the problem program exit list. The **EXLST** operand must be specified if the problem program processes user labels during the Open or Close routine, if the data control block exit routine is used for additional processing, or if the DCB ABEND exit is used for ABEND condition analysis.

Refer to Appendix D of this publication for the format and requirements of exit list processing. For additional information about exit list processing, refer to *OS/VS Data Management Services Guide*.

Source: The **EXLST** operand can be supplied in the DCB macro instruction or by the problem program before the exit is needed.

KEYLEN=*absexp* (maximum value is 255)

The **KEYLEN** operand specifies the length, in bytes, of all keys used in the data set. When keys are used, a key is associated with each data block in the data set. If the key length is not supplied by any source, no input or output requests that require a key can be specified in a **READ** or **WRITE** macro instruction.

Source: The **KEYLEN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before the completion of the data control block exit routine, or by an existing data set label. If **KEYLEN=0** is specified in the DCB macro instruction, a special indicator is set in **RECFM** so that **KEYLEN** cannot be supplied from the DCB subparameter of a DD statement or data set label of an existing data set. **KEYLEN=0** can be coded only in the DCB macro instruction and will be ignored if specified in the DD statement.

LIMCT=*absexp*

The **LIMCT** operand specifies the number of blocks or tracks to be searched when the extended search option (**OPTCD=E**) is requested.

When the extended search option is requested and relative block addressing is used, the records must be fixed-length record format. The system converts the number of blocks specified in the **LIMCT** operand into the number of tracks required to contain the blocks, then proceeds in the manner described below for relative track addressing.

When the extended search option is requested and relative track addressing is used (or the number of blocks has been converted to the number of tracks), the system searches for the block specified in a **READ** or **WRITE** macro instruction (type **DK**), or it searches for available space in which to add a block (**WRITE** macro instruction, type **DA**). The search is as follows:

- The search begins at the track specified by the *block address* operand of a **READ** or **WRITE** macro instruction.
- The search continues until the search is satisfied, the number of tracks specified in the **LIMCT** operand have been searched, or the entire data set has been searched.

If the search has not been satisfied when the last track of the data set is reached, the system continues the search by starting at the first track of the data set if the EOF marker is on the last track that was allocated to the data set. (This operation allows the number specified in the **LIMCT** operand to exceed the size of the data set, causing the entire data set to be searched.) You can insure that the EOF marker is on the last allocated track by determining the size of the data set and allocating space in blocks, or by allocating space in tracks and including the **RLSE** parameter on the **SPACE** operand of the **DD** statement (**RLSE** specifies that all unused tracks be returned to the system).

The problem program can change the **DCBLIMCT** field in the data control block at any time, but if the extended search option is used, the **DCBLIMCT** field must not be zero when a **READ** or **WRITE** macro instruction is issued.

If the extended search option is not requested, the system ignores the **LIMCT** operand, and the search for a data block is limited to a single track.

Source: The **LIMCT** operand can be supplied in the **DCB** macro instruction, the **DCB** subparameter of a **DD** statement, or by the problem program before the count is required by a **READ** or **WRITE** macro instruction.

MACRF = **{(R{K[I] | I}[X][S][C])}**
{(W{A[K][I] | K[I] | I}[C])}
{(R{K[I] | I}[X][S][C],W{A[K][I] | K[I] | I}[C])}

The **MACRF** operand specifies the type of macro instructions (**READ**, **WRITE**, **CHECK**, and **WAIT**) used when the data set is processed. The **MACRF** operand also specifies the type of search argument and **BDAM** functions used with the data set. When **BSAM** is used to create a **BDAM** data set, the **BSAM** operand **MACRF=WL** is specified. This special operand invokes the **BSAM** routine that can create a **BDAM** data set. The following describes the characters that can be specified for **BDAM**:

- A**
Specifies that data blocks are to be added to the data set.
- C**
Specifies that **CHECK** macro instructions are used to test for completion of read and write operations. If **C** is not specified, **WAIT** macro instructions must be used to test for completion of read and write operations.
- I**
Specifies that the search argument is to be the block identification portion of the data block. If relative addressing is used, the system converts the relative address to a full device address (**MBBCHHR**) before the search.
- K**
Specifies that the search argument is to be the key portion of the data block. The location of the key to be used as a search argument is specified in a **READ** or **WRITE** macro instruction.
- R**
Specifies that **READ** macro instructions are used. **READ** macro instructions can be issued when the data set is opened for **INPUT**, **OUTPUT**, or **UPDAT**.
- S**
Specifies that dynamic buffering is requested by specifying '**S**' in the area address operand of a **READ** or **WRITE** macro instruction.
- W**
Specifies that **WRITE** macro instructions are used. **WRITE** macro instructions can be issued only when the data set is opened for **OUTPUT** or **UPDAT**.

X

Specifies that READ macro instructions request exclusive control of a data block. When exclusive control is requested, the data block must be released by a subsequent WRITE or RELEX macro instruction.

Source: The MACRF operand must be supplied in the DCB macro instruction.

OPTCD=[R | A][E][F][W]

The OPTCD operand specifies the optional services that are to be used with the BDAM data set. These options are related to the type of addressing used, the extended search option, block position feedback, and write-validity checking. The following describes the characters that can be specified (the characters can be specified in any order and no commas are allowed between characters):

A

Specifies that actual device addresses (MBBCHHR) are provided to the system when READ or WRITE macro instructions are issued.

E

Specifies that the extended search option is used to locate data blocks or available space into which a data block can be added. When the extended search option is specified, the number of blocks or tracks to be searched must be specified in the LIMCT operand. The extended search option is ignored if actual addressing (OPTCD=A) is also specified. The extended search option requires that the data set have keys and that the search be made by key (by specifying DK in the READ or WRITE macro or DA in the WRITE macro).

F

Specifies that block position feedback requested by a READ or WRITE macro instruction is to be in the same form that was originally presented to the system in the READ or WRITE macro instruction. If the F operand is omitted, the system provides feedback, when requested, in the form of an 8-byte actual device address. (Feedback is always provided if exclusive control is requested.)

R

Specifies that relative block addresses (in the form of a 3-byte binary number) are provided to the system when a READ or WRITE macro instruction is issued.

W

Specifies that the system performs a validity check for each record written.

Note: Relative track addressing can only be specified by omitting both A and R from the OPTCD operand. If you want to specify relative track addressing after your data set has been accessed using another addressing scheme (OPTCD=A or R), you should either specify a valid OPTCD operand (E, F, or W) in the DCB macro or DD card when you reopen your data set, or zero out the OPTCD=A or R bits in the data control block exit routine. Note that the first method will prevent the open routines from merging any of the other OPTCD bits from the format-1 DSCB in the DCB. Both methods will update the OPTCD in the DSCB if the open is for OUTPUT, OUTIN, or UPDAT.

Source: The OPTCD operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before an OPEN macro instruction is issued to open the data set.

RECFM={U | V[S | BS] | F[T]}

The **RECFM** operand specifies the format and characteristics of the records in the data set. The following describes the characters that can be coded (if the optional characters are coded, they must be coded in the order shown above):

B

Specifies that the data set contains blocked records. The record format **RECFM=VBS** is the only combination in which **B** can be specified. **RECFM=VBS** does not cause the system to process spanned records; the problem program must block and segment the records. **RECFM=VBS** is treated as a variable-length record by BDAM.

F

Specifies that the data set contains fixed-length records.

S

Specifies that the data set contains variable-length spanned records when it is coded as **RECFM=VS**. When **RECFM=VBS** is coded, the records are treated as variable-length records, and the problem program must block and segment the records.

T

Specifies that the track-overflow feature is used with the data set. The track-overflow feature allows a record to be partially written on one track and the remainder is written on the following track (if required).

U

Specifies that the data set contains undefined-length records.

V

Specifies that the data set contains variable-length records.

Source: The **RECFM** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

SYNAD=*relexp*

The **SYNAD** operand specifies the address of the error analysis routine to be given control when an uncorrectable input/output error occurs. The contents of the registers when the error analysis routine is given control are described in Appendix A of this publication.

The error analysis routine must not use the save area pointed to by register 13 because this area is used by the system. The system does not restore registers when it regains control from the error analysis routine. The error analysis routine can issue a **RETURN** macro instruction which uses the address in register 14 to return control to the system. When control is returned in this manner, the system returns control to the problem program and proceeds as though no error had been encountered. When a BDAM data set is being created, a return from the error analysis routine to the system causes abnormal termination of the task.

If the **SYNAD** operand is omitted, the task is abnormally terminated when an uncorrectable input/output error occurs.

Source: The **SYNAD** operand can be supplied in the DCB macro instruction or by the problem program. The problem program can also change the error routine address at any time.

DCB—Construct a Data Control Block (BISAM)

The data control block for the basic indexed sequential access method (BISAM) is constructed during assembly of the problem program. The DCB macro instruction must not be coded within the first 16 bytes of addressability for the control section (CSECT). The **DSORG** and **MACRF** operands must be coded in the DCB macro instruction, but the other DCB operands can be supplied from other sources. Each BISAM DCB operand description contains a heading, "Source." The information under this heading describes the sources from which the operand can be supplied to the data control block.

Before a DCB macro instruction for a BISAM data set is coded, the following characteristics of BISAM data sets should be considered:

- BISAM cannot be used to create an indexed sequential data set.
- BISAM performs the functions of direct retrieval of a logical record by key, direct update-in-place for a block of records, direct insertion of a new record in its correct key sequence.
- Buffering can be controlled by the problem program, or dynamic buffering can be specified in the DCB macro instruction and subsequently requested in a READ macro instruction.
- The problem program must synchronize I/O operations by issuing a CHECK or WAIT macro instruction to test for completion of Read and Write operations.
- Additional DCB operands provide the capability of reducing input/output operations by defining work areas to contain the highest level master index and the records being processed.

For additional information about the characteristics of BISAM processing, refer to *OS/VS Data Management Services Guide*.

The DCB macro for BISAM is written as follows:

[symbol]	DCB	[BFALN={F D}] [BUFCB= relexp] [BUFL= absexp] [BUFNO= absexp] [DDNAME= symbol]¹ DSORG=IS [EXLST= relexp] MACRF= {(R[S][C])} {(W{U[A] A}[C])} {(R[U[S] S][C],W{U[A] A}[C])} [MSHI= relexp] [MSWA= relexp] [NCP= absexp] [SMSI= absexp] [SMSW= absexp] [SYNAD= relexp]
----------	------------	--

¹This parameter must be supplied before an OPEN macro is issued for this DCB; it cannot be supplied in the open exit routine.

The following describes the DCB operands that can be supplied when the basic indexed sequential access method is used:

BFALN=**{F | D}**

The **BFALN** operand specifies the boundary alignment for each buffer in the buffer pool when the buffer pool is acquired for use with dynamic buffering or when the buffer pool is constructed by a **GETPOOL** macro instruction. If the **BFALN** operand is omitted, the system provides doubleword alignment for each buffer. The following describes the characters that can be specified:

F

Specifies that each buffer is on a fullword boundary that is not also a doubleword boundary.

D

Specifies that each buffer is on a doubleword boundary.

If the **BUILD** macro instruction is used to construct the buffer pool or the problem program controls all buffering, the problem program must provide an area for the buffers and control buffer alignment.

Source: The **BFALN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

BUFCB=*relexp*

The **BUFCB** operand specifies the address of the buffer pool control block when the buffer pool is constructed by a **BUILD** macro instruction.

If dynamic buffering is requested or the buffer pool is constructed by a **GETPOOL** macro instruction, the system places the address of the buffer pool control block into the data control block, and the **BUFCB** operand must be omitted. The **BUFCB** operand must be omitted if the problem program controls all buffering.

Source: The **BUFCB** operand can be supplied in the DCB macro instruction or by the problem program before completion of the data control block exit routine.

BUFL=*absexp* (maximum value is 32,760)

The **BUFL** operand specifies the length of each buffer to be constructed by a **BUILD** or **GETPOOL** macro instruction. When the data set is opened, the system computes the minimum length required and verifies that the length in the buffer pool control block is equal to or greater than the minimum required. The system then inserts the computed length into the **BUFL** field of the data control block.

If dynamic buffering is requested, the system computes the buffer length required, and the **BUFL** operand is not required.

If the problem program controls all buffering, the **BUFL** operand is not required. However, an ISAM data set requires additional buffer space for system use. For a description of the buffer length required for various ISAM operations, refer to *OS/VS Data Management Services Guide*.

Source: The **BUFL** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

BUFNO=*absexp* (maximum value is 255)

The **BUFNO** operand specifies the number of buffers requested for use with dynamic buffering, or it specifies the number of buffers to be constructed by a **BUILD** macro instruction. If dynamic buffering is requested but the **BUFNO** operand is omitted, the system automatically acquires two buffers for use with dynamic buffering.

If the GETPOOL macro instruction is used to construct the buffer pool, the **BUFNO** operand is not required.

Source: The **BUFNO** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

DDNAME=*symbol*

The **DDNAME** operand specifies the name used to identify the job control language data definition statement that defines the ISAM data set to be processed.

Source: The **DDNAME** operand can be supplied in the DCB macro instruction or by the problem program before an OPEN macro instruction is issued to open the data set.

DSORG=IS

The **DSORG** operand specifies the indexed sequential organization of the data set. **IS** is the only combination of characters that can be coded for BISAM.

Source: The **DSORG** operand must be coded in the DCB macro instruction as well as in the DCB subparameter of a DD statement unless it is for a data set passed from a previous job step. In this case, **DSORG** may be omitted from the DD statement.

EXLST=*relexp*

The **EXLST** operand specifies the address of the problem program exit list. The **EXLST** operand is required if the problem program uses the data control block exit routine for additional processing or if the DCB ABEND exit is used for ABEND condition analysis.

Refer to Appendix D of this publication for the format and requirements for exit list processing. For additional information about exit list processing, refer to *OS/VS Data Management Services Guide*.

Source: The **EXLST** operand can be supplied in the DCB macro instruction or by the problem program before the associated exit is required.

MACRF= {(R[S][C])}

{(W{U[A] | A}[C])}

{(R[U[S] | S][C],W{U[A] | A}[C])}

The **MACRF** operand specifies the type of macro instructions (READ, WRITE, CHECK, WAIT, and FREEDBUF) and type of processing (add records, dynamic buffering, and update records) to be used with the data set being processed. The operand can be coded in any of the combinations shown above; the following describes the characters that can be coded:

A

Specifies that new records are to be added to the data set. This character must be coded if WRITE KN macro instructions are used with the data set.

C

Specifies that the CHECK macro instruction is used to test I/O operations for completion. If C is not coded, WAIT macro instructions must be used.

R

Specifies that READ macro instructions are used.

S

Specifies that dynamic buffering is requested in READ macro instructions. S should not be specified if the problem program provides the buffer pool.

U

Specifies that records in the data set will be updated in place. If **U** is coded in combination with **R**, it must also be coded in combination with **W**. For example, **MACRF=(RU,WU)**.

W

Specifies that **WRITE** macro instructions are used.

Source: The **MACRF** operand must be coded in the **DCB** macro instruction.

MSHI=relexp

The **MSHI** operand specifies the address of the storage area used to contain the highest level master index for the data set. The system uses this area to reduce the search time required to find a given record in the data set. The **MSHI** operand is coded only when the **SMSI** operand is coded.

Source: The **MSHI** operand can be supplied in the **DCB** macro instruction or by the problem program before completion of the data control block exit routine.

MSWA=relexp

The **MSWA** operand specifies the address of the storage work area to be used by the system when new records are being added to the data set. This operand is optional, but the system acquires a minimum-size work area if the operand is omitted. The **MSWA** operand is coded only when the **SMSW** operand is coded.

Processing efficiency can be increased if more than a minimum-size work area is provided. For more detailed information about work area size, refer to *OS/VS Data Management Services Guide*.

Note: **QISAM** uses the **DCBMSWA**, **DCBSMSI**, and **DCBSMSW** fields in the data control block as a work area; these fields contain meaningful information only when the data set is opened for **BISAM**.

Source: The **MSWA** operand can be supplied in the **DCB** macro instruction or by the problem program before completion of the data control block exit routine.

NCP=absexp (maximum value is 99)

The **NCP** operand specifies the maximum number of **READ/WRITE** macro instructions that are issued before the first **CHECK** (or **WAIT**) macro instruction is issued to test for completion of the I/O operation. The maximum number that can be specified may be less than 99 depending on the amount of virtual storage available in the region or partition. If the **NCP** operand is omitted, one is assumed. If dynamic buffering is used, the value specified for the **NCP** operand must not exceed the number of buffers specified in the **BUFNO** operand.

Source: The **NCP** operand can be supplied in the **DCB** macro instruction, in the **DCB** subparameter of a **DD** statement, or by the problem program before completion of the data control block open exit routine.

SMSI=absexp (maximum value is 65,535)

The **SMSI** operand specifies the length, in bytes, required to contain the highest level master index for the data set being processed. The size required can be determined from the **DCBNCRHI** field of the data control block. When an **ISAM** data set is created (with **QISAM**), the size of the highest level index is inserted into the **DCBNCRHI** field. If the value specified in the **SMSI** operand is less than the value in the **DCBNCRHI** field, the task is abnormally terminated.

Note: **QISAM** uses the **DCBMSWA**, **DCBSMSI**, and **DCBSMSW** fields as a work area; these fields contain meaningful information only when the data set is opened for **BISAM**.

Source: The **SMSI** operand can be supplied in the DCB macro instruction or by the problem program before completion of the data control block exit routine.

SMSW=absexp (maximum value is 65,535)

The **SMSW** operand specifies the length, in bytes, of a work area that is used by **BISAM**. This operand is optional, but the system acquires a minimum-size work area if the operand is omitted. The **SMSW** operand is coded only when the **MSWA** operand is also coded. If the **SMSW** operand is coded but the size specified is less than the minimum required, the task is abnormally terminated. *OS/VS Data Management Services Guide* describes the methods of calculating the size of the work area.

If unblocked records are used, the work area must be large enough to contain all the count fields (eight bytes each), key fields, and data fields contained on one direct-access device track.

If blocked records are used, the work area must be large enough to contain all the count fields (eight bytes each) and data fields contained on one direct-access device track plus additional space for one logical record (**LRECL** value).

Note: **QISAM** uses the **DCBMSWA**, **DCBSMSI**, and **DCBSMSW** fields in the data control block as a work area; these fields contain meaningful information only when the data set is opened for **BISAM**.

Source: The **SMSW** operand can be supplied in the DCB macro instruction or by the problem program before completion of the data control block exit routine.

SYNAD=relexp

The **SYNAD** operand specifies the address of the error analysis routine given control when an uncorrectable input/output error occurs. The contents of the registers when the error analysis routine is given control are described in Appendix A of this publication.

The error analysis routine must not use the save area pointed to by register 13 because this area is used by the system. The system does not restore registers when it regains control from the error analysis routine. The error analysis routine can issue a **RETURN** macro instruction which uses the address in register 14 to return control to the system. When control is returned in this manner, the system returns control to the problem program and proceeds as though no error had been encountered. If the error analysis routine continues processing, the results are unpredictable.

If the **SYNAD** operand is omitted, the task is abnormally terminated when an uncorrectable input/output error occurs.

Source: The **SYNAD** operand can be supplied in the DCB macro instruction or by the problem program. The problem program can also change the error analysis routine address at any time.

DCB—Construct a Data Control Block (BPAM)

The data control block for the basic partitioned access method (BPAM) is constructed during assembly of the problem program. The DCB macro instruction can be coded at any point in a control section (CSECT). The **DSORG** and **MACRF** operands must be specified in the DCB macro instruction, but the other DCB operands can be supplied from other sources. Each of the BPAM DCB operand descriptions contains a heading, "Source." The information under this heading describes the sources which can supply the operand to the data control block.

Before a DCB macro instruction for a BPAM data set is coded, the following characteristics of partitioned data sets should be considered:

- The entire partitioned data set must reside on one direct-access volume, but several such data sets, on the same or different volumes, can be concatenated for input.
- When a partitioned data set is being created, the first (or only) DD statement for the data set must contain a **SPACE** parameter defining the size of the entire data set and its directory. From this information, the system allocates space for the data set and pre-formats the data set directory. As subsequent data set members are added, they are added in the space originally allocated.
- A single member of a partitioned data set can be added or retrieved using **BSAM** or **QSAM** without using the **BLDL**, **FIND**, or **STOW** macro instructions. In this case, the data set member is being processed as a sequential data set (**DSORG=PS**). Processing a member in this manner does not provide the full capability of the basic partitioned access method. For more information about processing a member using **BSAM** or **QSAM**, refer to *OS/VS Data Management Services Guide*.
- A single member or multiple members can be added, retrieved, or updated using **BPAM** (many of the routines used by **BPAM** are actually **BSAM** routines).
- Buffers for a **BPAM** data set can be acquired automatically, but buffer control must be provided by the problem program. The problem program must issue a **READ** macro instruction that provides a buffer address to fill an input buffer, and it must place the data in an output buffer before issuing a **WRITE** macro instruction to write a data block.
- Although a **BPAM** data set can contain blocked records, the problem program must perform all blocking and deblocking of records. **BPAM** provides only the capability to read or write a data block, but the data block can contain multiple logical records assembled by the problem program.
- The **STOW** macro instruction can be used to add, delete, change, or replace a member name or alias in the directory.
- Multiple members of the data set can be processed by building a list of member locations (with a **BLDL** macro instruction) and using the **FIND** macro instruction (in conjunction with the list) to locate the beginning of each member.
- The problem program must synchronize I/O operations by issuing a **CHECK** macro instruction for each **READ** or **WRITE** macro instruction issued.

These characteristics of partitioned data sets and the basic partitioned access method are described in more detail in *OS/VS Data Management Services Guide*.

The DCB macro for BPAM is written as follows:

[<i>symbol</i>]	DCB	<pre> [BFALN={F D}] [BLKSIZE=<i>absexp</i>] [BUFCB=<i>relexp</i>] [BUFL=<i>absexp</i>] [BUFNO=<i>absexp</i>] [DDNAME=<i>symbol</i>]¹ DSORG={PO POU} [EODAD=<i>relexp</i>] [EXLST=<i>relexp</i>] [KEYLEN=<i>absexp</i>] [LRECL=<i>absexp</i>] MACRF={(R W R,W)}¹ [NCP=<i>absexp</i>] [OPTCD={C W[C]}] [RECFM={U[T][A M]} {V[B[T] T][A M]} {F[B[T] T][A M]}] [SYNAD=<i>relexp</i>] </pre>
-------------------	-----	--

¹This parameter must be supplied before an OPEN macro is issued for this DCB; it cannot be supplied in the open exit routine.

The following describes the DCB operands that can be specified when a BPAM data set is being created or processed:

BFALN={F | D}

The **BFALN** operand specifies the boundary alignment for each buffer in the buffer pool when the buffer pool is constructed automatically or by a GETPOOL macro instruction. If the **BFALN** operand is omitted, the system provides doubleword alignment for each buffer. The following describes the characters that can be specified in the **BFALN** operand:

F

Specifies that each buffer is aligned on a fullword boundary that is not also a doubleword boundary.

D

Specifies that each buffer is aligned on a doubleword boundary.

If the BUILD macro instruction is used to construct the buffer pool or if the problem program controls all buffering, the problem program must provide an area for the buffers and control buffer alignment.

Source: The **BFALN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

BLKSIZE=*absexp* (maximum value is 32,760)

The **BLKSIZE** operand specifies the length, in bytes, of each data block for fixed-length records, or it specifies the maximum length, in bytes, for variable-length or undefined-length records. If keys are used, the length of the key is not included in the value specified for the **BLKSIZE** operand.

The actual block size that can be specified depends on the record format and the type of direct-access device being used. If the track-overflow feature is used, the block size can be up to the maximum. If the track-overflow feature is not used, the maximum

block size is determined by the track capacity of a single track on the direct-access device being used. Device capacity for direct-access devices is described in Appendix C of this publication. For additional information about device capacity and space allocation, refer to *OS/VS Data Management Services Guide*.

For variable-length records, the value specified in the **BLKSIZE** operand must include the maximum logical record length (up to 32,756 bytes) plus four bytes for the block descriptor word (BDW).

For undefined-length records, the value specified for the **BLKSIZE** operand can be altered by the problem program when the actual length becomes known to the problem program. The value can be inserted into the DCBBLKSI field of the data control block or specified in the *length* operand of a READ/WRITE macro instruction.

Source: The **BLKSIZE** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

BUF*CB=relexp*

The **BUF***CB* operand specifies the address of the buffer pool control block when the buffer pool is constructed by a BUILD macro instruction.

If the buffer pool is constructed automatically or by a GETPOOL macro instruction, the system places the address of the buffer pool control block into the data control block and the **BUF***CB* operand can be omitted. Also, if the problem program controls all buffering, the **BUF***CB* operand should be omitted.

Source: The **BUF***CB* operand can be supplied in the DCB macro instruction or by the problem program before completion of the data control block exit routine.

BUFL=absexp (maximum value is 32,760)

The **BUFL** operand specifies the length, in bytes, of each buffer in the buffer pool when the buffer pool is acquired automatically. If the **BUFL** operand is omitted and the buffer pool is acquired automatically, the system acquires buffers with a length that is equal to the sum of the values specified in the **KEYLEN** and **BLKSIZE** operands. If the problem program requires longer buffers, the **BUFL** operand should be specified.

If the problem program controls all buffering, the **BUFL** operand is not required.

Source: The **BUFL** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

BUFNO=absexp (maximum value is 255)

The **BUFNO** operand specifies the number of buffers to be constructed by a BUILD macro instruction, or it specifies the number of buffers to be acquired automatically by the system.

If the problem program controls all buffering or if the buffer pool is constructed by a GETPOOL macro instruction, the **BUFNO** operand should be omitted.

Source: The **BUFNO** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

DDNAME=*symbol*

The **DDNAME** operand specifies the name used to identify the job control language data definition (DD) statement that defines the data set being created or processed.

Source: The **DDNAME** operand can be supplied in the DCB macro instruction or by the problem program before an OPEN macro instruction is issued to open the data set.

DSORG={PO | POU}

The **DSORG** operand specifies the data set organization and if the data set contains any location-dependent information that would make it unmovable. The following describes the characters that can be specified:

PO

Specifies a partitioned data set organization.

POU

Specifies a partitioned data set organization and that the data set contains location-dependent information.

Note: If BSAM or QSAM is used to add or retrieve a single member of a partitioned data set, a sequential access method is being used, and the **DSORG** operand is specified as **PS** or **PSU**. The name of the member being processed in this manner is supplied in a DD statement.

Source: The **DSORG** operand must be specified in the DCB macro instruction.

EODAD=*relexp*

The **EODAD** operand specifies the address of the routine given control when the end of the input data set is reached. Control is given to this routine when an input request is made (READ macro instruction) and there are no additional input records to retrieve. The routine is entered when a CHECK macro instruction is issued and the end of the data set is reached. If the end of the data set is reached and no **EODAD** address has been supplied, the task is abnormally terminated. For additional information on the EODAD routine, see *OS/VS Data Management Services Guide*.

Source: The **EODAD** operand can be supplied in the DCB macro instruction or by the problem program before the end of the data set is reached.

EXLST=*relexp*

The **EXLST** operand specifies the address of the problem program exit list. The **EXLST** operand is required if the problem program uses the data control block exit routine for additional processing or if the DCB ABEND exit is used for ABEND condition analysis.

Refer to Appendix D of this publication for the format and requirements of the exit list processing. For additional information about exit list processing, refer to *OS/VS Data Management Services Guide*.

Source: The **EXLST** operand can be supplied in the DCB macro instruction or by the problem program before the OPEN macro instruction is issued to open the data set.

KEYLEN=*absexp* (maximum value is 255)

The **KEYLEN** operand specifies the length, in bytes, of the key associated with each data block in the direct-access device data set. If the key length is not supplied from any source by the end of the data control block exit routine, a key length of zero (no keys) is assumed.

Source: The **KEYLEN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before the completion of the data control block exit routine, or by the data set label of an existing data set. If **KEYLEN=0** is specified in the DCB macro instruction, a special indicator is set in RECFM so that **KEYLEN** cannot be supplied from the DCB subparameter of a DD statement or data set label of an existing data set. **KEYLEN=0**

can be coded only in the DCB macro instruction and will be ignored if specified in the DD statement.

LRECL=absexp (maximum value is 32,760)

The **LRECL** operand specifies the length, in bytes, of each fixed-length logical record in the data set; It is required only for fixed-length records. The value specified in the **LRECL** operand cannot exceed the value specified in the **BLKSIZE** operand.

If the records are unblocked, the value specified in the **LRECL** operand must equal the value specified in the **BLKSIZE** operand. If the records are blocked, the value specified in the **LRECL** operand must be evenly divisible into the value specified in the **BLKSIZE** operand.

Source: The **LRECL** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

MACRF={R | W | R,W}

The **MACRF** operand specifies the type of macro instructions (**READ**, **WRITE**, and **NOTE/POINT**) that are used to process the data set. The following describes the characters that can be specified:

R

Specifies that **READ** macro instructions are used. This operand automatically provides the capability to use both the **NOTE** and **POINT** macro instructions with the data set.

W

Specifies that **WRITE** macro instructions are used. This operand automatically provides the capability to use both the **NOTE** and **POINT** macro instructions with the data set.

All BPAM **READ** and **WRITE** macro instructions issued must be tested for completion using a **CHECK** macro instruction. The **MACRF** operand does not require any coding to specify that a **CHECK** macro instruction will be used.

Source: The **MACRF** operand must be specified in the DCB macro instruction.

NCP=absexp (maximum value is 99)

The **NCP** operand specifies the maximum number of **READ** and **WRITE** macro instructions that will be issued before the first **CHECK** macro instruction is issued. The maximum number may be less than 99 depending on the amount of virtual storage available in the region or partition. If chained scheduling is specified, the value of **NCP** determines the maximum number of channel program segments that can be chained and must be specified as more than one. If the **NCP** operand is omitted, one is assumed.

Source: The **NCP** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block open exit routine.

OPTCD={C | W[C]}

The **OPTCD** operand specifies the optional services performed by the system. The following describes the characters that can be specified; they can be specified in any order and no commas are allowed between characters:

C

Specifies that chained scheduling is used. OS/VS1 supports chained scheduling in nonpageable storage only. If chained scheduling is requested in pageable storage, the request is ignored and normal scheduling is substituted.

For OS/VS2, chained scheduling is supported for pageable and nonpageable storage.

W

Specifies that the system performs a validity check for each record written.

Source: The **OPTCD** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before an OPEN macro instruction is issued to open the data set. However, all optional services must be requested from the same source.

RECFM={U[T][A | M]}

{V[B[T] | T][A | M]}

{F[B[T] | T][A | M]}

The **RECFM** operand specifies the record format and characteristics of the data set being created or processed. All the record formats shown above can be specified, but in those formats that show blocked records, the problem program must perform the blocking and deblocking of logical records; BPAM recognizes only data blocks. The following describes the characters that can be specified:

A

Specifies that the records in the data set contain American National Standards Institute (ANSI) control characters. Refer to Appendix E for a description of control characters.

B

Specifies that the data set contains blocked records.

F

Specifies that the data set contains fixed-length records.

M

Specifies that the records in the data set contain machine code control characters. Refer to Appendix E for a description of control characters.

T

Specifies that the track-overflow feature is used with the data set. The track-overflow feature allows a record to be written partially on one track of a direct-access device and the remainder of the record written on the following track (if required). Chained scheduling (**OPTCD=C**) cannot be used if the track-overflow feature is used.

U

Specifies that the data set contains undefined-length records.

V

Specifies that the data set contains variable-length records.

Source: The **RECFM** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

SYNAD=relexp

The **SYNAD** operand specifies the address of the error analysis (**SYNAD**) routine to be given control when an uncorrectable input/output error occurs. The contents of the registers when the error analysis routine is given control are described in Appendix A.

The error analysis routine must not use the save area pointed to by register 13, because this area is used by the system. The system does not restore registers when it regains control from the error analysis routine. The error analysis routine can return control to the system by issuing a **RETURN** macro instruction. If control is returned to the system, the system returns control to the problem program and proceeds as though no error had been encountered.

If the **SYNAD** operand is omitted, the task is abnormally terminated when an uncorrectable input/output error occurs.

Source: The **SYNAD** operand can be supplied in the **DCB** macro instruction or by the problem program. The problem program can also change the error routine address at any time.



DCB—Construct a Data Control Block (BSAM)

The data control block for the basic sequential access method (BSAM) is constructed during assembly of the problem program. The **DSORG** and **MACRF** operands must be coded in the DCB macro instruction, but the other DCB operands can be supplied, to the data control block, from other sources. Each DCB operand description contains a heading, "Source." The information under this heading describes the sources from which an operand can be supplied.

Before a DCB macro instruction for creating or processing a BSAM data set is coded, the following characteristics of BSAM data sets should be considered:

- Although several record formats with blocked records can be specified for BSAM, the problem program must perform all blocking and deblocking of records. BSAM provides only the capability to read or write a data block, but the block can contain one or more logical records assembled by the problem program.
- Buffers for a BSAM data set can be acquired automatically, but buffer control must be provided by the problem program. The problem program must issue a **READ** macro instruction that provides a buffer address to fill an input buffer, and it must place the data in an output buffer before issuing the **WRITE** macro instruction to write a data block.
- The problem program must synchronize I/O operations by issuing a **CHECK** macro instruction for each **READ** and **WRITE** macro instruction issued.
- BSAM provides capability for nonsequential processing by using the **NOTE** and **POINT** macro instructions.
- Keys for direct-access device records can be read or written using BSAM.
- Specifying the **DEVD** operand in the DCB macro instruction can make the program device dependent.

These characteristics of basic sequential access method data sets are described in more detail in *OS/VS Data Management Services Guide*.

For information on additional operands for the DCB macro for the 1275 or 1419, see *OS Data Management Services and Macro Instructions for IBM 1419/1275*.

For information on additional operands for the DCB macro for the 3886, see *OS/VS IBM 3886 Optical Character Reader Model 1 Reference*.

The DCB macro for BSAM is written as follows:

[symbol]	DCB	<pre> [BFALN={F D}] [BFTEK=R] [BLKSIZE=absexp] [BUFCB=relexp] [BUFL=absexp] [BUFNO=absexp] [BUFOFF={absexp L}] [DDNAME=symbol]¹ [DEVD= {DA [,KEYLEN=absexp]} {TA [,DEN={0 1 2 3 4}] [,TRTCH={C E ET T}}] {PT [,CODE={A B C F I N T}}] {PR [,PRTSP={0 1 2 3}}] {PC [,MODE=[C E][R]] [,STACK={1 2}] [,FUNC={I P PW[XT] R RP[D] RW[T] RWP[XT][D] W[T]}}] {RD [,MODE=[C E][O R]] [,STACK={1 2}] [,FUNC={I P PW[XT] R RP[D] RW[T] RWP[XT][D] W[T]}}] DSORG={PS PSU} [EODAD=relexp] [EXLST=relexp] [KEYLEN=absexp] [LRECL={absexp X}] MACRF= {(R[C P])} {(W[C P L])} {(R[C],W[C])}¹ [NCP=absexp] </pre>
----------	-----	--

¹This parameter must be supplied before an OPEN macro is issued for this DCB; it cannot be supplied in the open exit routine.

Continued on next page.

		<p>[OPTCD= {B} {T} {U[C]} {C[T][B]} {H[Z][B]} {W[C][T][B]} {Z[C][T][B]} {Q[C][B][T Z]}]</p> <p>[RECFM={U[T][A M]} {V[B S T BS BT][A M]} {D[B][A]} {F[B S T BS BT][A M]}]</p> <p>[SYNAD= <i>relexp</i>]</p>
--	--	---

The following describes the operands that can be specified in the DCB macro instruction for a BSAM data set:

BFALN={F | D}

The **BFALN** operand specifies the boundary alignment for each buffer in the buffer pool when the buffer pool is constructed automatically or by a **GETPOOL** macro instruction. If the **BFALN** operand is omitted, the system provides doubleword alignment for each buffer.

If the data set being created or processed contains ASCII tape records with a block prefix, the block prefix is entered at the beginning of the buffer, and data alignment depends on the length of the block prefix. For a description of how to specify the block prefix length, refer to the DCB **BUFOFF** operand.

The following describes the characters that can be specified:

F

Specifies that each buffer is on a fullword boundary that is not also a doubleword boundary.

D

Specifies that each buffer is on a doubleword boundary.

If the **BUILD** macro instruction is used to construct the buffer pool or if the problem program controls all buffering, the problem program must provide an area for the buffers and control buffer alignment.

Source: The **BFALN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. If both the **BFALN** and **BFTEK** operands are specified, they must be supplied by the same source.

BFTEK=R

The **BFTEK=R** operand specifies that BSAM is used to read unblocked variable-length spanned records with keys from a BDAM data set. Each read operation reads one segment of the record and places it in the area designated in the **READ** macro instruction. The first segment enters at the beginning of the area, but all

subsequent segments are offset by the length of the key (only the first segment has a key). The problem program must provide an area in which to assemble a record, identify each segment, and assemble the segments into a complete record.

Source: The **BFTEK** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. If both the **BFTEK** and **BFALN** operands are specified, they must be supplied from the same source.

BLKSIZE=absexp (maximum value is 32,760)

The **BLKSIZE** operand specifies the maximum block length in bytes. For fixed-length, unblocked records, this operand specifies the record length. The **BLKSIZE** operand includes only the data block length; if keys are used, the length of the key is not included in the value specified for the **BLKSIZE** operand.

The actual value that can be specified in the **BLKSIZE** operand depends on the device type and the record format being used. Device capacity is shown in Appendix C of this publication. For additional information about device capacity, refer to *OS/VS Data Management Services Guide*. For direct-access devices when the track-overflow feature is used or variable-length spanned records are being processed, the value specified in the **BLKSIZE** operand can be up to the maximum value. For other record formats used with direct-access devices, the value specified for **BLKSIZE** cannot exceed the capacity of a single track.

If fixed-length records are used for a SYSOUT data set, the value specified in the **BLKSIZE** operand must be an integral multiple of the value specified for the logical record length (**LRECL**); otherwise the system will adjust the block size downward to the nearest multiple.

If variable-length records are used, the value specified in the **BLKSIZE** operand must include the maximum logical record length (up to 32,756 bytes) plus the four bytes required for the block descriptor word (BDW). For format-D variable-length records (ASCII data sets), the minimum value for **BLKSIZE** is 18 bytes and the maximum value is 2,048 bytes.

If ASCII tape records with a block prefix are processed, the value specified in the **BLKSIZE** operand must also include the length of the block prefix.

If BSAM is used to read variable-length spanned records from a BDAM data set, the value specified for the **BLKSIZE** operand must be as large as the longest possible record segment in the BDAM data set, including four bytes for the segment descriptor word (SDW) and four bytes for the block descriptor word (BDW).

If undefined-length records are used, the value specified for the **BLKSIZE** operand can be altered by the problem program when the actual length becomes known to the problem program. The value can be inserted directly into the DCBBLKSI field of the data control block or specified in the *length* operand of a READ/WRITE macro instruction.

Source: The **BLKSIZE** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

BUFCB=relexp

The **BUFCB** operand specifies the address of the buffer pool control block in a buffer pool constructed by a BUILD macro instruction.

If the buffer pool is constructed automatically or by a GETPOOL macro instruction, the system places the address of the buffer pool control block into the data control block, and the **BUFCB** operand should be omitted. If the problem program controls all buffering, the **BUFCB** operand is not required.

Source: The **BUFCB** operand can be supplied in the DCB macro instruction or by the problem program before completion of the data control block exit routine.

BUFL=absexp (maximum value is 32,760)

The **BUFL** operand specifies the length, in bytes, for each buffer in the buffer pool when the buffer pool is acquired automatically. The system acquires buffers with a length equal to the sum of the values specified in the **KEYLEN** and **BLKSIZE** operands if the **BUFL** operand is omitted; if the problem program requires larger buffers, the **BUFL** operand must be specified. If the **BUFL** operand is specified, it must be at least as large as the value specified in the **BLKSIZE** operand. If the data set is for card image mode, the **BUFL** operand should be specified as 160. The description of the **DEVD** operand contains a description of card image mode.

If the data set contains ASCII tape records with a block prefix, the value specified in the **BUFL** operand must include the block length plus the length of the block prefix.

If the problem program controls all buffering or if the buffer pool is constructed by a **GETPOOL** or **BUILD** macro instruction, the **BUFL** operand is not required.

Source: The **BUFL** operand can be supplied in the DCB macro instruction, in the **DCB** subparameter of a **DD** statement, or by the problem program before completion of the data control block exit routine.

BUFNO=absexp (maximum value is 255)

The **BUFNO** operand specifies the number of buffers constructed by a **BUILD** macro instruction or the number of buffers to be acquired automatically by the system.

If the problem program controls all buffering or if the buffer pool is constructed by a **GETPOOL** macro instruction, the **BUFNO** operand should be omitted.

Source: The **BUFNO** operand can be supplied in the DCB macro instruction, in the **DCB** subparameter of a **DD** statement, or by the problem program before completion of the data control block exit routine.

BUFOFF={ absexp | L }

The **BUFOFF** operand specifies the length, in bytes, of the block prefix used with an ASCII tape data set. When **BSAM** is used to read an ASCII tape data set, the problem program must use the block prefix length to determine the location of the data in the buffer. When **BSAM** is used to write an output ASCII tape data set, the problem program must insert the block prefix into the buffer followed by the data (**BSAM** considers the block prefix as data). The block prefix and data can consist of any characters that can be translated into ASCII code; any character that cannot be translated is replaced with a substitute character. For format-D records, the **RDW** must be binary; if **RECFM=D** and **BUFOFF=L**, then the **RDW** and **BDW** must be binary. On output, the control program translates the **BDW** and **RDW** to zoned decimal and on input, the control program converts them to binary. The following can be specified in the **BUFOFF** operand:

absexp

Specifies the length, in bytes, of the block prefix. This value can be from 0 to 99 for an input data set. The value must be 0 for writing an output data set with fixed-length or undefined-length records (**BSAM** considers the block prefix part of the data record).

L

Specifies that the block prefix is 4 bytes long and contains the block length. **BUFOFF=L** is used when format-D records (ASCII) are processed. When **BUFOFF=L** is specified, the **BSAM** problem program can process the data records (using **READ** and **WRITE** macro instructions) in the same manner as if the data were in format-V variable-length records. For further information on this operand,

see "Variable-Length Records—Format D" in *OS/VS Data Management Services Guide*.

If the **BUFOFF** operand is omitted for an input data set with format-D records, the system inserts the record length into the DCBLRECL field of the data control block; the problem program must obtain the length from this field to process the record.

If the **BUFOFF** operand is omitted from an output data set with format-D records, the problem program must insert the actual record length into the DCBBLKSI field of the data control block or specify the record length in the length operand of a **WRITE** macro instruction.

Source: The **BUFOFF** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before an **OPEN** macro instruction is issued to open the data set. **BUFOFF=absexp** can also be supplied by the label of an existing data set; **BUFOFF=L** cannot be supplied by the label of an existing data set.

DDNAME=*symbol*

The **DDNAME** operand specifies the name used to identify the job control language data definition (DD) statement that defines the data set being created or processed.

Source: The **DDNAME** operand can be supplied in the DCB macro instruction or by the problem program before an **OPEN** macro instruction is issued to open the data set.

DEVD={DA | TA | PT | PR | PC | RD}[, *options*]

The **DEVD** operand specifies the device type on which the data set can or does reside. The device types above are shown with the optional operand(s) that can be coded when a particular device is used. The devices are listed in order of device-independence. For example, if **DEVD=DA** is coded in a DCB macro instruction (or the **DEVD** operand is omitted, which causes a default to **DA**), the data control block constructed during assembly could later be used for any of the other devices, but if **DEVD=RD** is coded, the data control block can be used only with a card reader or card reader punch. Unless you are certain that device interchangeability is not required, you should either code **DEVD=DA** or omit the operand and allow it to default to **DA**.

If system input is directed to an intermediate storage device, the **DEVD** operand is omitted, and the job control language for the problem program designates the system input device to be used. Likewise, if system output is directed to an intermediate storage device, the **DEVD** operand is omitted, and the job control language for the problem program designates the system output device to be used.

If **DEVD=PT** is coded, the DCB macro should not be coded within the first 8 bytes of addressability for the control section (CSECT). If **DEVD=PR**, **PC**, or **RD** is coded, the DCB macro should not be coded within the first 16 bytes of addressability for the control section.

The **DEVD** operand is discussed below according to individual device type:

DEVD=DA

[, **KEYLEN=** *absexp*]

Specifies that the data control block can be used for a direct-access device (or any of the other device types described following **DA**).

KEYLEN=*absexp*

The **KEYLEN** operand can be specified only for data sets that reside on direct-access devices. Since the **KEYLEN** is usually coded without a **DEVD** operand (default taken), the description of the **KEYLEN** operand is in alphabetic sequence with the other operands.

DEVD=TA

[,DEN={0 | 1 | 2 | 3 | 4}]

[,TRTCH={C | E | ET | T}]

Specifies that the data control block can be used for a magnetic tape data set (or any of the other device types described following TA). If TA is coded, the following optional operands can be coded:

DEN={0 | 1 | 2 | 3 | 4}

The DEN operand specifies the recording density in the number of bits-per-inch per track as shown in the following chart:

Recording Density

DEN	7-Track Tape	9-Track Tape
0	200	—
1	556	—
2	800	800 (NRZI) ¹
3	—	1600 (PE) ²
4	—	6250 (GCR) ³

¹ NRZI is for non-return-to-zero inverted mode² PE is for phase encoded mode³ GCR is for group coded recording mode

Note: Specifying DEN=0 for a 7-track 3420 tape attached to a 3803-1 will result in 556 bits-per-inch recording, but corresponding messages and tape labels will indicate 200 bits-per-inch recording density.

If the DEN operand is not supplied by any source, the highest applicable density is assumed.

TRTCH={C | E | ET | T}

The TRTCH operand specifies the recording technique for 7-track tape. One of the above four character combinations can be coded. If the TRTCH operand is omitted, odd parity with no translation or conversion is assumed. The following describes the characters that can be specified:

C

Specifies that the data-conversion feature is used with odd parity and no translation.

E

Specifies even parity with no translation or conversion.

ET

Specifies even parity with BCDIC to EBCDIC translation required and no data-conversion feature.

T

Specifies that BCDIC to EBCDIC translation is required with odd parity and no data-conversion feature.

DEVD=PT

[,CODE={A | B | C | F | I | N | T}]

Specifies that the data control block is used for a paper tape device (or any of the other devices following **PT**). If **PT** is coded, the following optional operand can be coded:

CODE={A | B | C | F | I | N | T}

The **CODE** operand specifies the code in which the data was punched. The system converts these codes to EBCDIC code. If the **CODE** operand is not supplied by any source, **CODE=I** is assumed. The following describes the characters that can be specified:

A

Specifies 8-track tape in ASCII code.

B

Specifies Burroughs 7-track tape.

C

Specifies National Cash Register 8-track tape.

F

Specifies Friden 8-track tape.

I

Specifies IBM BCD perforated tape and transmission code with 8 tracks.

N

Specifies that no conversion is required.

TSpecifies Teletype¹ 5-track tape.**DEVD=PR**

[,PRTSP={0 | 1 | 2 | 3}]

Specifies that the data control block is used for an on-line printer (or any of the other device types following **PR**). If **PR** is coded, the following optional operand can be coded:

PRTSP={0 | 1 | 2 | 3}

The **PRTSP** operand specifies the line spacing on the printer. This operand is not valid if the **RECFM** operand specifies either machine (**RECFM=M**) or ANSI (**RECFM=A**) control characters. If the **PRTSP** operand is not specified from any source, one is assumed. The following describes the characters that can be specified:

0

Specifies that spacing is suppressed (no space).

1

Specifies single-spacing.

2

Specifies double-spacing (one blank line between printed lines).

3

Specifies triple-spacing (two blank lines between printed lines).

¹Trademark of Teletype Corporation.

DEV D=PC[,**MODE**=[**C** | **E**][**R**]][,**STACK**={**1** | **2**}][,**FUNC**={**I** | **P** | **PW**[**XT**] | **R** | **RP**[**D**] | **RW**[**T**] | **RWP**[**XT**][**D**] | **W**[**T**]}]

Specifies that the data control block is used for a card punch (or any of the other device types following **PC**). If **PC** is coded, the following optional operands can be specified:

MODE=[**C** | **E**][**R**]

The **MODE** operand specifies the mode of operation for the card punch. The following describes the characters that can be specified (if the **MODE** operand is omitted, **E** is assumed):

C

Specifies that the cards are to be punched in card image mode. In card image mode, the 12 rows in each card column are punched from two consecutive bytes in virtual storage. Rows 12 through 3 are punched from the low-order 6 bits of one byte and rows 4 through 9 are punched from the low-order 6 bits of the following byte.

E

Specifies that cards are to be punched in EBCDIC code.

R

Specifies that the program runs in read-column-eliminate mode (3505 card reader or 3525 card punch, read feature).

Note: If the **MODE** operand is specified in the DCB subparameter of a DD statement, either **C** or **E** must be specified if **R** is specified.

STACK={**1** | **2**}

The **STACK** operand specifies the stacker bin into which the card is placed after punching is completed. If this operand is omitted, stacker number 1 is used. The following describes the characters that can be specified:

1

Specifies stacker number 1.

2

Specifies stacker number 2.

FUNC={**I** | **P** | **PW**[**XT**] | **R** | **RP**[**D**] | **RW**[**T**] | **RWP**[**XT**][**D**] | **W**[**T**]}

The **FUNC** operand defines the type of 3525 card punch data sets that are used. If the **FUNC** operand is omitted from all sources, a data set opened for input defaults to read only, and a data set opened for output defaults to punch only. The following describes the characters that can be specified in the **FUNC** operand:

D

Specifies that the data protection option is to be used. The data protection option prevents punching information into card columns that already contain data. When the data protection option is used, an 80-byte data protection image (DPI) must have been previously stored in SYS1.IMAGELIB. Data protection applies only to the output/punch portion of a read and punch or read punch and print operation.

I

Specifies that the data in the data set is to be punched into cards and printed on the cards; the first 64 characters are printed on line 1 of the card and the remaining 16 characters are printed on line 3.

P
Specifies that the data set is for punching cards. See the description of the character **X** for associated punch and print data sets.

R
Specifies that the data set is for reading cards.

T
Specifies that the two-line print option is used. The two-line print option allows two lines of data to be printed on the card (lines 1 and 3). If **T** is not specified, the multiline print option is used; this allows printing on all 25 possible print lines. In either case, the data printed may be the same as the data punched in the card, or it may be entirely different data.

W
Specifies that the data set is for printing. See the description of the character **X** for associated punch and print data sets.

X
Specifies that an associated data set is opened for output for both punching and printing. Coding the character **X** is used to distinguish the 3525 printer output data set from the 3525 punch output data set.

Note: If data protection is specified, the data protection image (DPI) must be specified in the FCB parameter of the DD statement for the data set.

DEV D=RD

[,MODE=[C | E][O | R]]

[,STACK={1 | 2}]

[,FUNC={I | P | PW[XT] | R | RP[D] | RW[T] | RWP[XT][D] | W[T]}]

Specifies that the data control block is used with a card reader or card read punch. If **RD** is specified, the data control block cannot be used with any other device type. When **RD** is coded, the following optional operands can be specified:

MODE=[C | E][O | R]

The **MODE** operand specifies the mode of operation for the card reader. The following describes the characters that can be specified:

C
Specifies that the cards to be read are in card image mode. In card image mode, the 12 rows in each card column are read into two consecutive bytes of virtual storage. Rows 12 through 3 are read into one byte and rows 4 through 9 are read into the following byte.

E
Specifies that the cards to be read contain data in EBCDIC code.

O
Specifies that the program runs in optical-mark-read mode (3505 card reader).

R
Specifies that the program runs in read-column-eliminate mode (3505 card reader or 3525 card punch, read feature).

Note: If the **MODE** operand for a 3505 or 3525 is specified in the DCB subparameter of a DD statement, either **C** or **E** must be specified if **R** or **O** is specified.

STACK={1 | 2}

The **STACK** operand specifies the stacker bin into which the card is placed after reading is completed. If this operand is omitted, stacker number 1 is used. The following describes the characters that can be specified:

1

Specifies stacker number 1.

2

Specifies stacker number 2.

FUNC={**I** | **P** | **PW**[**XT**] | **R** | **RP**[**D**] | **RW**[**T**] | **RWP**[**XT**][**D**] | **W**[**T**]}

The **FUNC** operand defines the type of 3525 card punch data sets that are used. If the **FUNC** operand is omitted from all sources, a data set opened for input defaults to read only, and a data set opened for output defaults to punch only. The following describes the characters that can be specified in the **FUNC** operand:

D

Specifies that the data protection option is to be used. The data protection option prevents punching information into card columns that already contain data. When the data protection option is used, an 80-byte data protection image (DPI) must have been previously stored in SYS1.IMAGELIB. Data protection applies only to the output/punch portion of a read and punch or read punch and print operation.

I

Specifies that the data in the data set is to be punched into cards and printed on the cards; the first 64 characters are printed on line 1 of the card and the remaining 16 characters are printed on line 3.

P

Specifies that the data set is for punching cards. See the description of the character **X** for associated punch and print data sets.

R

Specifies that the data set is for reading cards.

T

Specifies that the two-line print option is used. The two-line print option allows two lines of data to be printed on the card (lines 1 and 3). If **T** is not specified, the multiline print option is used; this allows printing on all 25 possible print lines. In either case, the data printed may be the same as the data punched in the card, or it may be entirely different data.

W

Specifies that the data set is for printing. See the description of the character **X** for associated punch and print data sets.

X

Specifies that an associated data set is opened for output for both punching and printing. Coding the character **X** is used to distinguish the 3525 printer output data set from the 3525 punch output data set.

Note: If data protection is specified, the data protection image (DPI) must be specified in the FCB subparameter of the DD statement for the data set.

Source: The **DEVD** operand can be supplied only in the DCB macro instruction. However, the optional operands can be supplied in the DCB macro instruction, the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

DSORG={PS | PSU}

The **DSORG** operand specifies the organization of the data set and if the data set contains any location-dependent information that would make it unmovable. The following can be specified:

PS

Specifies a physical sequential data set.

PSU

Specifies a physical sequential data set that contains location-dependent information that would make it unmovable.

Source: The **DSORG** operand must be coded in the DCB macro instruction.

EODAD=*relexp*

The **EODAD** operand specifies the address of the routine given control when the end of an input data set is reached. If the record format is **RECFM=FS** or **FBS**, the end-of-data condition is sensed when a file mark is read or when more data is requested after reading a truncated block. The end of data routine is entered when the **CHECK** macro instruction determines that the **READ** macro instruction reached the end of the data. If the end of the data set is reached but no **EODAD** address has been supplied, the task is abnormally terminated. See *OS/VS Data Management Services Guide* for additional information on the **EODAD** routine.

When the data set has been opened for **UPDAT** and volumes are to be switched, the problem program should issue a **FEOV** macro instruction after the **EODAD** routine has been entered.

Source: The **EODAD** operand can be supplied in the DCB macro instruction or by the problem program before the end of the data set is reached.

EXLST=*relexp*

The **EXLST** operand specifies the address of the problem program exit list. The **EXLST** operand is required if the problem program requires additional processing for user labels, user totaling, data control block exit routine, end-of-volume, block count exits, to define a forms control buffer (FCB) image, or to use the DCB **ABEND** exit for **ABEND** condition analysis.

Refer to Appendix D of this publication for the format and requirements of exit list processing. For additional information about exit list processing, refer to *OS/VS Data Management Services Guide*.

Source: The **EXLST** operand can be supplied in the DCB macro instruction or by the problem program any time before the exit is required by the problem program.

KEYLEN=*absexp* (maximum value is 255)

The **KEYLEN** operand specifies the length, in bytes, for the key associated with each data block in a direct-access device data set. If the key length is not supplied from any source before completion of the data control block exit routine, a key length of zero (no keys) is assumed.

Source: The **KEYLEN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a **DD** statement, by the problem program before the completion of the data control block exit routine, or by the data set label of an existing data set. If **KEYLEN=0** is specified in the DCB macro instruction, a special indicator is set in **RECFM** so that **KEYLEN** cannot be supplied from the DCB subparameter of a **DD** statement or data set label of an existing data set. **KEYLEN=0** can be coded only in the DCB macro instruction and will be ignored if specified in the **DD** statement.

LRECL={ *absexp* | **X**}

The **LRECL** operand specifies the length, in bytes, for fixed-length records, or it specifies the maximum length, in bytes, for variable-length records. **LRECL=X** is used for variable-length spanned records that exceed 32,756 bytes. Except when variable-length spanned records are used, the value specified for the **LRECL** operand cannot exceed the value specified for the **BLKSIZE** operand.

Except when variable-length spanned records are used, the **LRECL** operand can be omitted for BSAM; the system uses the value specified in the **BLKSIZE** operand. If the **LRECL** value is coded, it is coded as described in the following.

For fixed-length records that are unblocked, the value specified in the **LRECL** operand should be equal to the value specified in the **BLKSIZE** operand. For blocked fixed-length records, the value specified in the **LRECL** operand should be evenly divisible into the value specified in the **BLKSIZE** operand.

For variable-length records, the value specified in **LRECL** must include the maximum data length (up to 32,752 bytes) plus 4 bytes for the RDW.

For undefined-length records, the **LRECL** operand should be omitted; the actual length can be supplied dynamically in a READ/WRITE macro instruction. When an undefined-length record is read, the actual length of the record is returned by the system in the DCBLRECL field of the data control block.

When BSAM is used to create a BDAM data set with variable-length spanned records, the **LRECL** value should be the maximum data length (up to 32,752) plus four bytes for the record descriptor word (RDW), or if the logical record length is greater than 32,756 bytes, **LRECL=X** is specified.

Source: The **LRECL** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

MACRF={ (R[C | P]) }

{ (W[C | P | L]) }

{ (R[C], W[C]) }

The **MACRF** operand specifies the type of macro instructions (READ, WRITE, CNTRL, and NOTE/POINT) that are used with the data set being created or processed. The BSAM **MACRF** operand also provides the special form (**MACRF=WL**) for creating a BDAM data set. The **MACRF** operand can be coded in any of the forms shown above. The following characters can be coded:

C

Specifies that the CNTRL macro instruction is used with the data set. If **C** is specified to be used with a card reader, a CNTRL macro instruction must follow every input request.

L

Specifies that BSAM is used to create a BDAM data set. This character can be specified only in the combination **MACRF=WL**.

P

Specifies that POINT macro instructions are used with the data set being created or processed. Specifying **P** in the **MACRF** operand also automatically provides the capability of using NOTE macro instructions with the data set. For VS2, **P** must not be coded for SYSIN or SYSOUT data sets.

R

Specifies that READ macro instructions are used.

W

Specifies that WRITE macro instructions are used.

Note: Each READ and WRITE macro instruction issued in the problem program must be checked for completion by a CHECK macro instruction.

Source: The MACRF operand must be specified in the DCB macro instruction.

NCP=absexp (maximum value is 99)

The NCP operand specifies the maximum number of READ/WRITE macro instructions that will be issued before the first CHECK macro instruction is issued to test for completion of the I/O operation. The maximum number may be less than 99 depending on the amount of virtual storage available in the region or partition. If chained scheduling is specified (**OPTCD=C**), the value of NCP determines the maximum number of channel program segments that can be chained and must be specified as more than one. If the NCP operand is omitted, one is assumed.

Source: The NCP operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block open exit routine.

OPTCD= {B}

{T}

{U[C]}

{C[T][B]}

{H[Z][B]}

{W[C][T][B]}

{Z[C][T][B]}

{Q[C][B][T | Z]}

The **OPTCD** operand specifies the optional services that are used with the BSAM data set. Two of the optional services, **OPTCD=B** and **OPTCD=H**, cannot be specified in the DCB macro instruction. They are requested in the DCB subparameter of a DD statement. Since all optional services requests must be supplied by the same source, the **OPTCD** operand must be omitted from the DCB macro instruction if either of these options is requested in a DD statement. The following describes the characters that can be specified—these characters can be specified in any order (in one of the combinations shown above), and no commas are allowed between characters:

C

Requests that chained scheduling be used. **OPTCD=C** cannot be specified if **BFTEK=R** is specified for the same data control block. Also, chained scheduling cannot be specified for associated data sets or printing on a 3525. OS/VS1 supports chained scheduling in nonpageable storage only. If chained scheduling is requested in pageable storage, the request is ignored and normal scheduling is substituted.

For OS/VS2, chained scheduling is supported for pageable and nonpageable storage.

Q

Requests that ASCII tape records in an input data set be converted to EBCDIC code after the input record has been read. Translation is done at CHECK time for input. It also requests that an output record in EBCDIC code be converted to ASCII code before the record is written. For further information on this conversion, see "Variable-Length Records—Format D" in *OS/VS Data Management Services Guide*.

T

Requests the user totaling facility. If this facility is requested, the **EXLST** operand should specify the address of an exit list to be used. **T** cannot be specified for **SYSIN** and **SYSOUT** data sets.

U

Specified only for a printer with the universal character set (UCS) feature. This option unblocks data checks (permits them to be recognized as errors) and allows analysis by the appropriate error analysis routine (**SYNAD** routine). If the **U** option is omitted, data checks are not recognized as errors.

W

Specifies that the system performs a validity check on each record written on a direct-access device.

Z

For magnetic tape, input only, the **Z** option requests the system to shorten its normal error recovery procedure to consider a data check as a permanent I/O error after five unsuccessful attempts to read a record. This option is available only if it is selected when the operating system is generated. **OPTCD=Z** is used when a tape is known to contain errors and there is no need to process every record. The error analysis routine (**SYNAD**) should keep a count of permanent errors and terminate processing if the number becomes excessive.

For direct-access devices only, the **Z** option requests the system to use the search direct option to accelerate the input operations for a data set. **OPTCD=Z** cannot be specified when **RECFM=UT, FS, FBT, VS, or VBS**.

Note: The following describes the optional services that can be requested in the **DCB** subparameter of a **DD** statement. If either of these options is requested, the complete **OPTCD** operand must be supplied in the **DD** statement.

B

If **OPTCD=B** is specified in the **DCB** subparameter of a **DD** statement, it forces the end-of-volume (EOV) routine to disregard the end-of-file recognition for magnetic tape. When this occurs, the EOV routine uses the number of volume serial numbers to determine end of file.

H

If **OPTCD=H** is specified in the **DCB** subparameter of a **DD** statement, it specifies that the DOS/OS interchange feature is being used with the data set.

Source: The **OPTCD** operand can be supplied in the **DCB** macro instruction, in the **DCB** subparameter of a **DD** statement, in the data set label for direct-access devices, or by the problem program before an **OPEN** macro instruction is issued to open the data set. However, all optional services must be requested from the same source.

RECFM= {U[T][A | M]}
 {V[B | S | T | BS | BT][A | M]}
 {D[B][A]}
 {F[B | S | T | BS | BT][A | M]}

The **RECFM** operand specifies the record format and characteristics of the data set being created or processed. All the record formats shown above can be specified, but in those record formats that specify blocked records, the problem program must perform the blocking and deblocking of logical records; BSAM recognizes only data blocks. The following describes the characters that can be specified:

- A**
Specifies that the records in the data set contain American National Standards Institute (ANSI) control characters. Refer to Appendix E for a description of control characters.
- B**
Specifies that the data set contains blocked records.
- D**
Specifies that the data set contains variable-length ASCII tape records. See **OPTCD=Q** and the **BUFOFF** operand for a description of how to specify ASCII data sets.
- F**
Specifies that the data set contains fixed-length records.
- M**
Specifies that the records in the data set contain machine code control characters. Refer to Appendix E for a description of control characters. **RECFM=M** cannot be used with ASCII data sets.
- S**
For fixed-length records, **S** specifies that the records are written as standard blocks; the data set does not contain any truncated blocks or unfilled tracks, with the exception of the last block or track in the data set.

For variable-length records, **S** specifies that a record can span more than one block. Spanned records can be read (reading a BDAM data set) or written (creating a BDAM data set) using BSAM.
- T**
Specifies that the track-overflow feature is used with the data set. The track-overflow feature allows a record to be written partially on one track of a direct-access device and the remainder of the record written on the following track (if required). Chained scheduling cannot be used if the track-overflow feature is used.
- U**
Specifies that the data set contains undefined-length records.
- V**
Specifies that the data set contains variable-length records.

Notes:

- **RECFM=V** cannot be specified for a card reader data set or an ASCII tape data set.
- **RECFM=VBS** does not provide the spanned record function; if this format is used, the problem program must block and segment the records.

- **RECFM=VS** or **VBS** cannot be specified for a **SYSIN** data set.
- **RECFM=V** cannot be used for a 7-track tape unless the data conversion feature (**TRTCH=C**) is used.

Source: The **RECFM** operand can be supplied in the **DCB** macro instruction, in the **DCB** subparameter of a **DD** statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

SYNAD=*relexp*

The **SYNAD** operand specifies the address of the error analysis (**SYNAD**) routine to be given control when an uncorrectable input/output error occurs. The contents of the registers when the error analysis routine is given control are described in Appendix A of this publication.

The error analysis routine must not use the save area pointed to by register 13, because this area is used by the system. The system does not restore registers when it regains control from the error analysis routine. The error analysis routine can issue a **RETURN** macro instruction which uses the address in register 14 to return control to the system. If control is returned to the system, the system returns control to the problem program and proceeds as though no error had been encountered.

If the **SYNAD** operand is omitted, the task is abnormally terminated when an uncorrectable input/output error occurs.

Source: The **SYNAD** operand can be supplied in the **DCB** macro instruction or by the problem program. The problem program can also change the error routine address at any time.

DCB—Construct a Data Control Block (QISAM)

The data control block for a queued indexed sequential access method (QISAM) data set is constructed during assembly of the problem program. The DCB macro instruction must not be coded within the first 16 bytes of addressability for the control section (CSECT). The **DSORG** and **MACRF** operands must be coded in the DCB macro instruction, but the other DCB operands can be supplied from other sources. Each QISAM DCB operand description contains a heading, "Source." The information under this heading describes the sources which can supply the operand to the data control block.

Before a DCB macro instruction for a QISAM data set is coded, the following characteristics of QISAM should be considered:

- The characteristics of a QISAM data set are established when the data set is created; these characteristics cannot be changed without reorganizing the data set. The following DCB operands establish the characteristics of the data set and can be coded only when creating the data set: **BLKSIZE**, **CYLOFL**, **KEYLEN**, **LRECL**, **NTM**, **OPTCD**, **RECFM**, and **RKP**.
- The data set can contain the following record formats: Unblocked fixed-length records (**F**), blocked fixed-length records (**FB**), unblocked variable-length records (**V**), or blocked variable-length records (**VB**).
- QISAM can create an indexed sequential data set (QISAM, load mode), add additional data records at the end of the existing data set (QISAM, resume load mode), update a record in place, or retrieve records sequentially (QISAM, scan mode).
- The track-overflow feature cannot be used to create an ISAM data set.
- When an indexed sequential data set is being created, space for the prime area of the data set, the overflow area of the data set, and the cylinder/master index(es) for the data set can be allocated on the same or separate volumes. For information about space allocation, refer to *OS/VS1 JCL Reference* or *OS/VS2 JCL*.
- The system automatically creates one track index for each cylinder in the data set and one cylinder index for the entire data set. The DCB **NTM** and **OPTCD** operands can be specified to indicate that the data set requires a master index(es); the system creates and maintains up to three levels of master indexes. *OS/VS Data Management Services Guide* contains additional information about indexes for indexed sequential data sets.
- A record deletion option can be specified (**OPTCD=L**) when the ISAM data set is created. This option allows a record to be flagged for deletion by placing a hexadecimal value of 'FF' in the first data byte of the record (first byte of a fixed-length record or fifth byte of a variable-length record). Records marked for deletion are ignored during sequential retrieval by QISAM.
- Reorganization statistics can be obtained by specifying **OPTCD=R** when the ISAM data set is created. These statistics can be used by the problem program to determine the status of the overflow areas allocated to the data set. Reorganization of ISAM data sets is described in *OS/VS Data Management Services Guide*.
- When an ISAM data set is created, the records must be written with the keys in ascending order.

These characteristics of queued indexed sequential access method data sets are described in more detail in *OS/VS Data Management Services Guide*.

The DCB macro for QISAM is written as follows:

[<i>symbol</i>]	DCB	<pre> [BFALN={F D}] [BLKSIZE=<i>absexp</i>] [BUFCB=<i>relexp</i>] [BUFL=<i>absexp</i>] [BUFNO=<i>absexp</i>] [CYLOFL=<i>absexp</i>] [DDNAME=<i>symbol</i>]¹ DSORG={IS ISU} [EODAD=<i>relexp</i>] [EXLST=<i>relexp</i>] [KEYLEN=<i>absexp</i>] [LRECL=<i>absexp</i>] MACRF= {(PM)} {(PL)} {(GM[,S{K I}]}) {(GL[,S{K I}][,PU])} [NTM=<i>absexp</i>] [OPTCD=[I][L][M][R][U][W][Y]] [RECFM={V[B] F[B]}] [RKP=<i>absexp</i>] [SYNAD=<i>relexp</i>] </pre>
-------------------	------------	---

¹This parameter must be supplied before an OPEN macro is issued for this DCB; it cannot be supplied in the open exit routine.

The following describes the DCB operands that can be specified when a QISAM data set is being created or processed:

BFALN={F | D}

The **BFALN** operand specifies the alignment of each buffer in the buffer pool when the buffer pool is constructed automatically or by a GETPOOL macro instruction. If the **BFALN** operand is omitted, the system provides doubleword alignment for each buffer. The following describes the characters that can be specified:

F

Specifies that each buffer is on a fullword boundary that is not also a doubleword boundary.

D

Specifies that each buffer is on a doubleword boundary.

If the **BUILD** macro instruction is used to construct the buffer pool, the problem program must provide a storage area for the buffers and control buffer alignment.

Source: The **BFALN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

BLKSIZE=*absexp* (maximum value is device-dependent)

The **BLKSIZE** operand specifies the length, in bytes, for each data block when fixed-length records are used, or it specifies the maximum length in bytes, for each data block when variable-length records are used. The **BLKSIZE** operand must be specified when an ISAM data set is created. When an existing ISAM data set is processed, the **BLKSIZE** operand must be omitted (it is supplied by the data set label).

Track capacity of the direct-access device being used must be considered when the **BLKSIZE** for an ISAM data set is specified. For fixed-length records, the sum of the key length, data length, and device overhead plus 10 bytes (for ISAM use) must not exceed the capacity of a single track on the direct-access device being used. For variable-length records the sum of the key length, block-descriptor word length, record-descriptor word length, data length, and device overhead plus 10 bytes (for ISAM use) must not exceed the capacity of a single track on the direct-access device being used. Device capacity and device overhead are described in Appendix C of this publication. For additional information about device capacity and space allocation, refer to *OS/VS Data Management Services Guide*.

If fixed-length records are used, the value specified in the **BLKSIZE** operand must be an integral multiple of the value specified in the **LRECL** operand.

Source: When an ISAM data set is created, the **BLKSIZE** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. When an existing ISAM data set is processed, the **BLKSIZE** operand must be omitted from the other sources, allowing the data set label to supply the value.

BUFCB=*relexp*

The **BUFCB** operand specifies the address of the buffer pool control block constructed by a **BUILD** macro instruction.

If the system constructs the buffer pool automatically or if the buffer pool is constructed by a **GETPOOL** macro instruction, the system places the address of the buffer pool control block into the data control block, and the **BUFCB** operand should be omitted.

Source: The **BUFCB** operand can be supplied in the DCB macro instruction or by the problem program before completion of the data control block exit routine.

BUFL=*absexp* (maximum value is 32,760)

The **BUFL** operand specifies the length, in bytes, of each buffer in the buffer pool when the buffer pool is constructed by a **BUILD** or **GETPOOL** macro instruction. When the data set is opened, the system computes the minimum buffer length required and verifies that the length in the buffer pool control block is equal to or greater than the minimum length required. The system then inserts the computed length into the data control block.

The **BUFL** operand is not required for **QISAM** if the system acquires buffers automatically; the system computes the minimum buffer length required and inserts the value into the data control block.

If the buffer pool is constructed with a **BUILD** or **GETPOOL** macro instruction, additional space is required in each buffer for system use. For a description of the buffer length required for various ISAM operations, refer to *OS/VS Data Management Services Guide*.

Source: The **BUFL** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

BUFNO=*absexp* (maximum value is 255)

The **BUFNO** operand specifies the number of buffers to be constructed by a **BUILD** macro instruction, or it specifies the number of buffers to be acquired automatically by the system. If the **BUFNO** operand is omitted, the system automatically acquires two buffers.

If the **GETPOOL** macro instruction is used to construct the buffer pool, the **BUFNO** operand is not required.

Source: The **BUFNO** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

CYLOFL=*absexp* (maximum value is 99)

The **CYLOFL** operand specifies the number of tracks on each cylinder that is reserved as an overflow area. The overflow area is used to contain records that are forced off prime area tracks when additional records are added to the prime area track in ascending key sequence. ISAM maintains pointers to records in the overflow area so that the entire data set is logically in ascending key sequence. Tracks in the cylinder overflow area are used by the system only if **OPTCD=Y** is specified. For a more complete description of cylinder overflow area, refer to the space allocation section of *OS/VS Data Management Services Guide*.

Source: When an ISAM data set is created, the **CYLOFL** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. When an existing ISAM data set is processed, the **CYLOFL** operand should be omitted, allowing the data set label to supply the operand.

DDNAME=*symbol*

The **DDNAME** operand specifies the name used to identify the job control language data definition (DD) statement that defines the data set being created or processed.

Source: The **DDNAME** operand can be supplied in the DCB macro instruction or by the problem program before an OPEN macro instruction is issued to open the data set.

DSORG=**{IS | ISU}**

The **DSORG** operand specifies the organization of the data set and if the data set contains any location-dependent information that would make it unmovable. The following characters can be specified:

IS

Specifies an indexed sequential data set organization.

ISU

Specifies an indexed sequential data set that contains location-dependent information. **ISU** can be specified only when an ISAM data set is created.

Source: The **DSORG** operand must be specified in the DCB macro instruction. When an ISAM data set is created, **DSORG=IS** or **ISU** must also be specified in the DCB subparameter of the corresponding DD statement.

EODAD=*relexp*

The **EODAD** operand specifies the address of the routine to be given control when the end of an input data set is reached. For ISAM, this operand would apply only to scan mode when a data set is open for an input operation. Control is given to this routine when a GET macro instruction is issued and there are no more input records to retrieve. For additional information on the EODAD routine, see *OS/VS Data Management Services Guide*.

Source: The **EODAD** operand can be supplied in the DCB macro instruction or by the problem program before the end of the data set is reached.

EXLST=*relexp*

The **EXLST** operand specifies the address of the problem program exit list. The **EXLST** operand is required only if the problem program uses the data control block exit routine for additional processing or if the DCB ABEND exit is used for ABEND condition analysis.

Refer to Appendix D of this publication for the format and requirements for exit list processing. For additional information about exit list processing, refer to *OS/VS Data Management Services Guide*.

Source: The **EXLST** operand can be supplied in the DCB macro instruction or by the problem program before the associated exit is required.

KEYLEN=absexp (maximum value is 255)

The **KEYLEN** operand specifies the length, in bytes, of the key associated with each record in an indexed sequential data set. When blocked records are used, the key of the last record in the block (highest key) is used to identify the block. However, each logical record within the block has its own identifying key which ISAM uses to access a given logical record.

Source: When an ISAM data set is created the **KEYLEN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. When an existing ISAM data set is processed, the **KEYLEN** operand must be omitted, allowing the data set level to supply the key length value. **KEYLEN=0** is not valid for an ISAM data set.

LRECL=absexp (maximum value is device-dependent)

The **LRECL** operand specifies the length, in bytes, for fixed-length records, or it specifies the maximum length, in bytes, for variable-length records. The value specified in the **LRECL** operand cannot exceed the value specified in the **BLKSIZE** operand. When fixed, unblocked records are used and the relative key position (as specified in the **RKP** operand) is zero, the value specified in the **LRECL** operand should include only the data length (the key is not written as part of the fixed, unblocked record when **RKP=0**).

The track capacity of the direct-access device being used must be considered if maximum length logical records are being used. For fixed-length records, the sum of the key length, data length, and device overhead plus 10 bytes (for ISAM use) must not exceed the capacity of a single track on the direct-access device being used. For variable-length records, the sum of the key length, data length, device overhead, block-descriptor-word length, and record-descriptor-word length plus 10 bytes (for ISAM use) must not exceed the capacity of a single track on the direct-access device being used. Device capacity and device overhead are described in Appendix C of this publication. For additional information about device capacity and space allocation, refer to *OS/VS Data Management Services Guide*.

Source: When an ISAM data set is created, the **LRECL** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. When an existing ISAM data set is processed, the **LRECL** operand must be omitted, allowing the data set label to supply the value.

MACRF= {(PM)}
{(PL)}
{{(GM[,S{K | I}]}}
{{(GL[,S{K | I}],PU)}

The **MACRF** operand specifies the type of macro instructions, the transmittal mode, and type of search to be used with the data set being processed. The operand can be coded in any of the combinations shown above; the following describes the characters that can be coded.

The following characters can be specified only when the data set is being created (load mode) or additional records are being added to the end of the data set (resume load):

PL

Specifies that **PUT** macro instructions are used in the locate transmittal mode; the system provides the problem program with the address of a buffer containing the data to be written into the data set.

PM

Specifies that **PUT** macro instructions are used in the move transmittal mode; the system moves the data to be written from the problem program work area to the buffer being used.

The following characters can be specified only when the data set is being processed (scan mode) or when records in an ISAM data set are being updated in place:

GL

Specifies that **GET** macro instructions are used in the locate transmittal mode; the system provides the problem program with the address of a buffer containing the logical record read.

GM

Specifies that **GET** macro instructions are used in the move mode; the system moves the logical record from the buffer to the problem program work area.

I

Specifies that actual device addresses (**MBBCHHR**) are used to search for a record (or the first record) to be read.

K

Specifies that a key or key class is used to search for a record (or the first record) to be read.

PU

Specifies that **PUTX** macro instructions are used to return updated records to the data set.

S

Specifies that **SETL** macro instructions are used to set the beginning location for processing the data set.

Source: The **MACRF** operand must be coded in the **DCB** macro instruction.

NTM=absexp (maximum value is 99)

The **NTM** operand specifies the number of tracks to be created in a cylinder index before a higher-level index is created. If the cylinder index exceeds this number, a master index is created by the system; if a master index exceeds this number, the next level of master index is created. The system creates up to three levels of master

indexes. The **NTM** operand is ignored unless the master index option (**OPTCD=M**) is selected.

Source: When an ISAM data set is being created, the **NTM** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. When an ISAM data set is being processed, master index information is supplied to the data control block from the data set label, and the **NTM** operand must be omitted.

OPTCD=[I][L][M][R][U][W][Y]

The **OPTCD** operand specifies the optional services performed by the system when an ISAM data set is being created. The following describes the characters that can be specified (these characters can be specified in any order, and no commas are allowed between characters):

I

Specifies that the system uses the independent overflow areas to contain overflow records. Note that it is only the use of the allocated independent overflow area that is optional. Under certain conditions, the system designates an overflow area that was not allocated for independent overflow by the problem program. See "Allocating Space for an Indexed Sequential Data Set" in *OS/VS Data Management Services Guide*.

L

Specifies that the data set will contain records flagged for deletion. A record is flagged for deletion by placing a hexadecimal value of 'FF' in the first data byte. Records flagged for deletion remain in the data set until the space is required for another record to be added to the track. Records flagged for deletion are ignored during sequential retrieval of the ISAM data set (QISAM, scan mode). This option cannot be specified for blocked fixed-length records if the relative key position is zero (**RKP=0**), or it cannot be specified for variable-length records if the relative key position is four (**RKP=4**).

When an ISAM data set is being processed with BISAM, a record with a duplicate key can be added to the data set (WRITE KN macro instruction, only when **OPTCD=L** has been specified and the original record (the one whose key is being duplicated) has been flagged for deletion.

M

Specifies that the system creates and maintains a master index(es) according to the number of tracks specified in the **NTM** operand.

R

Specifies that the system places reorganization statistics in the DCBRORG1, DCBRORG2, and DCBRORG3 fields of the data control block. The problem program can analyze these statistics to determine when to reorganize the data set. If the **OPTCD** operand is omitted completely, the reorganization statistics are automatically provided. However, if the **OPTCD** operand is supplied, **OPTCD=R** must be specified to obtain the reorganization statistics.

U

Specifies that the system accumulates track index entries in storage and writes them as a group for each track of the track index. **OPTCD=U** can be specified only for fixed-length records. The entries are written in fixed-length unblocked format.

W

Specifies that the system performs a validity check on each record written.

Y

Specifies that the system uses the cylinder overflow area(s) to contain overflow records. If **OPTCD=Y** is specified, the **CYLOFL** operand specifies the number of tracks to be used for the cylinder overflow area. The reserved cylinder overflow area is not used unless **OPTCD=Y** is specified.

Source: When an ISAM data set is created, the **OPTCD** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before an OPEN macro instruction is issued to open the data set. However, all optional services must be requested from the same source. When an existing ISAM data set is processed, the optional service information is supplied to the data control block from the data set label, and the **OPTCD** operand should be omitted.

RECFM={V[B] | F[B]}

The **RECFM** operand specifies the format and characteristics of the records in the data set. If the **RECFM** operand is omitted, variable-length records (unblocked) are assumed. The following describes the characters that can be specified:

B

Specifies that the data set contains blocked records.

F

Specifies that the data set contains fixed-length records.

V

Specifies that the data set contains variable-length records.

Source: When an ISAM data set is created, the **RECFM** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before an OPEN macro instruction is issued to open the data set. When an existing ISAM data set is processed, the record format information is supplied by the data set label, and the **RECFM** operand should be omitted.

RKP=absexp

The **RKP** operand specifies the relative position of the first byte of the key within each logical record. For example, if **RKP=9** is specified, the key starts in the tenth byte of the record. The delete option (**OPTCD=L**) cannot be specified if the relative key position is the first byte of a blocked fixed-length record or the fifth byte of a variable-length record. If the **RKP** operand is omitted, **RKP=0** is assumed.

If unblocked fixed-length records with **RKP=0** are used, the key is not written as a part of the data record, and the delete option can be specified. If blocked fixed-length records are used, the key is written as part of each data record; either **RKP** must be greater than zero or the delete option must not be used.

If variable-length records (blocked or unblocked) are used, **RKP** must be four or greater if the delete option is not specified; if the delete option is specified, **RKP** must be specified as five or greater. The four additional bytes allow for the block descriptor word in variable-length records.

Source: When an ISAM data set is created, the **RKP** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. When an existing ISAM data set is processed, the **RKP** information is supplied by the data set label and the **RKP** operand should be omitted.

SYNAD=*relexp*

The **SYNAD** operand specifies the address of the error analysis routine given control when an uncorrectable input/output error occurs. The contents of the registers when the error analysis routine is given control are described in Appendix A of this publication.

The error analysis routine must not use the save area pointed to by register 13, because this area is used by the system. The system does not restore registers when it regains control from the error analysis routine. The error analysis routine can issue a **RETURN** macro instruction which uses the address in register 14 to return control to the system. When control is returned in this manner, the system returns control to the problem program and proceeds as though no error had been encountered; if the error analysis routine continues processing, the results may be unpredictable.

For additional information on error analysis routine processing for indexed sequential data sets, see *OS/VS Data Management Services Guide*.

Source: The **SYNAD** operand can be supplied in the DCB macro instruction or by the problem program. The problem program can also change the error analysis routine address at any time.

DCB—Construct a Data Control Block (QSAM)

The data control block for the queued sequential access method (QSAM) is constructed during assembly of the problem program. The **DSORG** and **MACRF** operands must be coded in the DCB macro instruction, but the other DCB operands can be supplied, to the data control block, from other sources. Each DCB operand description contains a heading, "Source." The information under this heading describes the sources from which the operand can be supplied.

Before a DCB macro instruction for creating or processing a QSAM data set is coded, the following characteristics of QSAM data sets should be considered.

- All record formats can be processed.
- Automatic blocking and deblocking of records is provided.
- Automatic buffer control is provided; this function fills input buffers when they are empty and writes output buffers when they are full.
- A logical record interface is provided; a GET macro instruction retrieves the next sequential logical record from the input buffer, and a PUT macro instruction places the next sequential logical record in the output buffer.
- I/O operations are synchronized automatically.
- Four transmittal modes (move, locate, data, and substitute) are provided. These transmittal modes provide flexibility in buffer management and data movement between buffers.
- Keys for direct-access device records cannot be read or written using QSAM.
- Specifying the **DEVD** operand in the DCB macro instruction can cause the program to be device-dependent.

These characteristics of queued sequential access method data sets are described in more detail in *OS/VS Data Management Services Guide*.

For information on additional operands for the DCB macro for the 3890, see *IBM 3890 Document Processor Machine and Programming Description*.

The DCB macro for QSAM is written as follows:

[symbol]	DCB	<pre> [BFALN={F D}] [BFTEK={S E A}] [BLKSIZE=absexp] [BUFCB=relexp] [BUFL=absexp] [BUFNO=absexp] [BUFOFF={absexp L}] [DDNAME=symbol]¹ [DEVD= {DA} {TA [,DEN={0 1 2 3 4}] [,TRTCH={C E ET T}}] {PT [,CODE={A B C F I N T}}] {PR [,PRTSP={0 1 2 3}}] {PC [,MODE=[C E][R]] [,STACK={1 2}] [,FUNC={I P PW[XT] R RP[D] RW[T] RWP[XT][D] W[T}}]} {RD [,MODE=[C E][O R]] [,STACK={1 2}] [,FUNC={I P PW[XT] R RP[D] RW[T] RWP[XT][D] W[T}}]} DSORG={PS PSU} [EODAD=relexp] [EROPT={ACC SKP ABE}] [EXLST=relexp] [LRECL={absexp X}] MACRF= {(G{M L T D}{C})} {(P{M L T D}{C})} {(G{M L T D}{C},P{M L T D}{C})} </pre>
----------	-----	--

¹This parameter must be supplied before an OPEN macro is issued for this DCB; it cannot be supplied in the open exit routine.

Continued on next page.

		<p>[OPTCD= {B}</p> <p>{T}</p> <p>{U[C]}</p> <p>{C[T][B]}</p> <p>{H[Z][B]}</p> <p>{W[C][T][B]}</p> <p>{Z[C][T][B]}</p> <p>{Q[C][B][T Z]}</p> <p>[RECFM={U[T][A M]}</p> <p>{V[B][S][T] S[T] T}[A M]}</p> <p>{D[B][A]}</p> <p>{F[B S T BS BT][A M]}</p> <p>[SYNAD=<i>relexp</i>]</p>
--	--	--

The following describes the operands that can be specified in the DCB macro instruction for a QSAM data set:

BFALN={F | D}

The **BFALN** operand specifies the boundary alignment of each buffer in the buffer pool when the buffer pool is constructed automatically or by a GETPOOL macro instruction. If the **BFALN** operand is omitted, the system provides doubleword alignment for each buffer.

If the data set being created or processed contains ASCII tape records with a block prefix, the block prefix is entered at the beginning of the buffer, and data alignment depends on the length of the block prefix. For a description of how to specify the block prefix length, refer to the **BUFOFF** operand.

The following describes the characters that can be specified:

F

Specifies that each buffer is on a fullword boundary that is not also a doubleword boundary.

D

Specifies that each buffer is on a doubleword boundary.

When exchange buffering (**BFTEK=E**) is specified and the records are in blocked fixed-length format, each buffer segment is aligned as specified in the **BFALN** operand (VS1 systems only).

If the **BUILD** macro instruction is used to construct the buffer pool, the problem program must control buffer alignment.

Source: The **BFALN** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. If both the **BFALN** and **BFTEK** operands are specified, they must be supplied from the same source.

BFTEK={S | E | A}

The **BFTEK** operand specifies the buffering technique that is used when the QSAM data set is created or processed. If the **BFTEK** operand is omitted, simple buffering is assumed. The following describes the characters that can be specified:

S

Specifies that simple buffering is used.

E

Specifies that exchange buffering is used. Exchange buffering can be used only with record formats (**RECFM** operand) **F**, **FB**, **FBS**, or **FS**; the track-overflow feature cannot be used with exchange buffering. If exchange buffering is used with ASCII tape records, the **BUFOFF** operand must be zero (no block prefix). **BFTEK=E** is ignored by VS2 systems.

A

Specifies that a logical record interface is used for variable-length spanned records. When **BFTEK=A** is specified, the Open routine acquires a record area equal to the length specified in the **LRECL** field plus 32 additional bytes for control information. When a logical record interface is requested, the system uses the simple buffering technique.

To use the simple or exchange buffering technique efficiently, the user should be familiar with the four transmittal modes for QSAM and the buffering techniques as described in *OS/VS Data Management Services Guide*.

Source: The **BFTEK** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine. If both the **BFTEK** and **BFALN** operands are specified, they must be supplied from the same source.

BLKSIZE=*absexp* (maximum value is 32,760)

The **BLKSIZE** operand specifies the length, in bytes, of a data block for fixed-length records, or it specifies the maximum length, in bytes, of a data block for variable-length or undefined-length records.

The actual value that can be specified in the **BLKSIZE** operand depends on the device type and record format being used. Device capacity is shown in Appendix C of this publication. For additional information about device capacity, refer to *OS/VS Data Management Services Guide*. For direct-access devices when the track-overflow feature is used or variable-length spanned records are being processed, the **BLKSIZE** operand can be up to the maximum value. For other record formats used with direct-access devices, the value specified in the **BLKSIZE** operand cannot exceed the capacity of a single track.

Since QSAM provides a logical record interface, the device capacities shown in Appendix C also apply to a maximum length logical record. One exception to the device capacity for a logical record is the size of variable-length spanned records. Their length can exceed the value specified in the **BLKSIZE** operand (see the description of the **LRECL** operand).

If fixed-length records are used for a SYSOUT data set, the value specified in the **BLKSIZE** operand must be an integral multiple of the value specified in the **LRECL** operand; otherwise, the system will adjust the block size downward to the nearest multiple. If the records are unblocked fixed-length records, the value specified in the **BLKSIZE** operand must equal the value specified in the **LRECL** operand if the **LRECL** operand is specified.

If variable-length records are used, the value specified in the **BLKSIZE** operand must include the data length (up to 32,756 bytes) plus four bytes required for the block descriptor word (BDW). For format-D variable-length records, the minimum **BLKSIZE** is 18 bytes and the maximum is 2,048 bytes.

If ASCII tape records with a block prefix are processed, the value specified in the **BLKSIZE** operand must also include the length of the block prefix.

If variable-length spanned records are used, the value specified in the **BLKSIZE** operand can be the best one for the device being used or the processing being done. When unit record devices (card or printer) are used, the system assumes records are unblocked; the value specified for the **BLKSIZE** operand is equivalent to one print line or one card. A logical record that spans several blocks is written one segment at a time.

If undefined-length records are used, the problem program can insert the actual record length into the **DCBLRECL** field. See the description of the **LRECL** operand.

Source: The **BLKSIZE** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

BUFCB=*relexp*

The **BUFCB** operand specifies the address of the buffer pool control block constructed by a **BUILD** or **BUILDRCD** macro instruction.

If the buffer pool is constructed automatically or by a **GETPOOL** macro instruction, the system places the address of the buffer pool control block into the data control block, and the **BUFCB** operand should be omitted.

Source: The **BUFCB** operand can be supplied in the DCB macro instruction or by the problem program before completion of the data control block exit routine.

BUFL=*absexp* (maximum value is 32,760)

The **BUFL** operand specifies the length, in bytes, of each buffer in the buffer pool when the buffer pool is acquired automatically. The system acquires buffers with a length equal to the value specified in the **BLKSIZE** operand if the **BUFL** operand is omitted; if the problem program requires larger buffers, the **BUFL** operand is required. If the data set is for card image mode, the **BUFL** operand is specified as 160 bytes. The description of the **DEVD** operand contains a description of card image mode.

If the data set contains ASCII tape records with a block prefix, the value specified in the **BUFL** operand must also include the length of the block prefix.

If the buffer pool is constructed by a **BUILD**, **BUILDRCD**, or **GETPOOL** macro instruction, the **BUFL** operand is not required.

Source: The **BUFL** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

BUFNO=*absexp* (maximum value is 255)

The **BUFNO** operand specifies the number of buffers in the buffer pool constructed by a **BUILD** or **BUILDRCD** macro instruction, or it specifies the number of buffers to be acquired automatically. If chained scheduling is specified, the value of **BUFNO** determines the maximum number of channel program segments that can be chained and must be specified as more than one. If the **BUFNO** operand is omitted and the buffers are acquired automatically, the system acquires three buffers if the device is a 2540 card read punch or two buffers for any other device type. For VS2, the system acquires five buffers.

If the buffer pool is constructed by a GETPOOL macro instruction, the **BUFNO** operand is not required.

Source: The **BUFNO** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

BUFOFF={ *absexp* | **L**}

The **BUFOFF** operand specifies the length, in bytes, of the block prefix used with ASCII tape data sets. When QSAM is used to read ASCII tape records, only the data portion (or its address) is passed to the problem program; the block prefix is not available to the problem program. Block prefixes (except **BUFOFF=L**) cannot be included in QSAM output records. The following can be specified in the **BUFOFF** operand:

absexp

Specifies the length, in bytes, of the block prefix. This value can be from 0 to 99 for an input data set. The value must be 0 for writing an output data set with fixed-length or undefined-length records.

L

Specifies that the block prefix is 4 bytes long and contains the block length.

BUFOFF=L is used when format-D records (ASCII) are processed. QSAM uses the four bytes as a block-descriptor word (BDW). For further information on this operand, see “Variable-Length Records—Format D” in *OS/VS Data Management Services Guide*.

Source: The **BUFOFF** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, or by the problem program before an OPEN macro instruction is issued to open the data set. **BUFOFF=absexp** can also be supplied by the label of an existing data set; **BUFOFF=L** cannot be supplied by the label of an existing data set.

DDNAME=*symbol*

The **DDNAME** operand specifies the name used to identify the job control language data definition (DD) statement that defines the data set being created or processed.

Source: The **DDNAME** operand can be supplied in the DCB macro instruction or by the problem program before an OPEN macro instruction is issued to open the data set.

DEVD={**DA** | **TA** | **PT** | **PR** | **PC** | **RD**}[, *options*]

The **DEVD** operand specifies the device type on which the data set can or does reside. The device types above are shown with the optional operand(s) that can be coded when a particular device is used. The devices are listed in order of device-independence. For example, if **DEVD=DA** is coded in a DCB macro instruction (or the **DEVD** operand is omitted, which causes a default to **DA**), the data control block constructed during assembly could later be used for any of the other devices, but if **DEVD=RD** is coded, the data control block can be used only with a card reader or card reader punch. Unless you are certain that device interchangeability is not required, you should either code **DEVD=DA** or omit the operand and allow it to default to **DA**.

If system input is directed to an intermediate storage device, the **DEVD** operand is omitted, and the job control language for the problem program must designate the system input to be used. Similarly, if system output is directed to an intermediate storage device, the **DEVD** operand is omitted, and the job control language for the problem program must designate the system output to be used.

If **DEVD=PT** is coded, the **DCB** macro should not be coded within the first 8 bytes of addressability for the control section (**CSECT**). If **DEVD=PR, PC, or RD** is coded, the **DCB** macro should not be coded within the first 16 bytes of addressability for the control section.

The **DEVD** operand is discussed below according to individual device type:

DEVD=DA

Specifies that the data control block can be used for a direct-access device (or any of the other device types described following **DA**).

DEVD=TA

[, **DEN**={0 | 1 | 2 | 3 | 4}]

[, **TRTCH**={C | E | ET | T}]

Specifies that the data control block can be used for a magnetic tape data set (or any of the other device types described following **TA**). If **TA** is coded, the following optional operands can be coded:

DEN={0 | 1 | 2 | 3 | 4}

The **DEN** operand specifies the recording density in the number of bits-per-inch per track as shown in the following chart:

Recording Density

DEN	7-Track Tape	9-Track Tape
0	200	—
1	556	—
2	800	800 (NRZI) ¹
3	—	1600 (PE) ²
4	—	6250 (GCR) ³

¹ NRZI is for non-return-to-zero inverted mode

² PE is for phase encoded mode

³ GCR is for group coded recording mode

Note: Specifying **DEN=0** for a 7-track 3420 tape attached to a 3803-1 will result in 556 bits-per-inch recording, but corresponding messages and tape labels will indicate 200 bits-per-inch recording density.

If the **DEN** operand is not supplied by any source, the highest applicable density is assumed.

TRTCH={C | E | ET | T}

The **TRTCH** operand specifies the recording technique for 7-track tape. One of the above character combinations can be coded. If the **TRTCH** operand is omitted, odd parity with no translation or conversion is assumed. The following describes the characters that can be specified:

C

Specifies that the data-conversion feature is used with odd parity and no translation.

E

Specifies even parity with no translation or conversion.

ET

Specifies even parity with BCDIC to EBCDIC translation required, but no data-conversion feature.

T

Specifies that BCDIC to EBCDIC translation is required with odd parity and no data-conversion feature.

DEVD=PT[**CODE**={**A** | **B** | **C** | **F** | **I** | **N** | **T**}]

Specifies that the data control block is used for a paper tape device (or any of the other devices following **PT**). If **PT** is coded, the following optional operand can be coded:

CODE={**A** | **B** | **C** | **F** | **I** | **N** | **T**}

The **CODE** operand specifies the code in which the data was punched. The system converts these codes to EBCDIC code. If the **CODE** operand is not supplied by any source, **CODE=I** is assumed. The following describes the characters that can be specified:

A

Specifies 8-track tape in ASCII code.

B

Specifies Burroughs 7-track tape.

C

Specifies National Cash Register 8-track tape.

F

Specifies Friden 8-track tape.

I

Specifies IBM BCD perforated tape and transmission code with 8-tracks.

N

Specifies that no conversion is required.

TSpecifies Teletype¹ 5-track tape.**DEVD=PR**[**PRTSP**={**0** | **1** | **2** | **3**}]

Specifies that the data control block is used for an on-line printer (or any of the other device types following **PR**). If **PR** is coded, the following optional operand can be coded:

PRTSP={**0** | **1** | **2** | **3**}

The **PRTSP** operand specifies the line spacing on the printer. This operand is not valid if the **RECFM** operand specifies either machine (**RECFM=M**) or ANSI (**RECFM=A**) control characters. If the **PRTSP** operand is not specified from any source, one is assumed. The following describes the characters that can be specified:

0

Specifies that spacing is suppressed (no space).

1

Specifies single-spacing.

2

Specifies double-spacing (one blank line between printed lines).

3

Specifies triple-spacing (two blank lines between printed lines).

¹Trademark of Teletype Corporation.

DEVD=PC[,**MODE**=[**C** | **E**][**R**]][,**STACK**={**1** | **2**}][,**FUNC**={**I** | **P** | **PW**[**XT**] | **R** | **RP**[**D**] | **RW**[**T**] | **RWP**[**XT**][**D**] | **W**[**T**]}]

Specifies that the data control block is used for a card punch (or any of the other device types following **PC**). If **PC** is coded, the following optional operands can be specified:

MODE=[**C** | **E**][**R**]

The **MODE** operand specifies the mode of operation for the card punch. If the **MODE** operand is omitted, **E** is assumed. The following describes the characters that can be specified:

C

Specifies that the cards are punched in card image mode. In card image mode, the 12 rows in each card column are punched from two consecutive bytes of virtual storage. Rows 12 through 3 are punched from the low-order 6 bits of one byte, and row 4-9 are punched from the 6 low-order bits of the following byte.

E

Specifies that cards are punched in EBCDIC code.

R

Specifies that the program runs in read-column-eliminate mode (3505 card reader or 3525 card punch, read feature).

Note: If the **MODE** operand is specified in the DCB subparameter of a DD statement, either **C** or **E** must be specified if **R** is specified.

STACK={**1** | **2**}

The **STACK** operand specifies the stacker bin into which the card is placed after punching is completed. If this operand is omitted, stacker number 1 is used. The following describes the characters that can be specified:

1

Specifies stacker number 1.

2

Specifies stacker number 2.

FUNC={**I** | **P** | **PW**[**XT**] | **R** | **RP**[**D**] | **RW**[**T**] | **RWP**[**XT**][**D**] | **W**[**T**]}

The **FUNC** operand defines the type of 3525 card punch data sets that are used. If the **FUNC** operand is omitted from all sources, a data set opened for input defaults to read only, and a data set opened for output defaults to punch only. The following describes the characters that can be specified in the **FUNC** operand:

D

Specifies that the data protection option is to be used. The data protection option prevents punching information into card columns that already contain data. When the data protection option is used, an 80-byte data protection image (DPI) must have been previously stored in SYS1.IMAGELIB. Data protection applies only to the output punch portion of a read and punch or read, punch, and print operation.

I

Specifies that the data in the data set is to be punched into cards and printed on the cards; the first 64 characters are printed on line 1 of the card and the remaining 16 characters are printed on line 3.

P
Specifies that the data set is for punching cards. See the description of the character **X** for associated punch and print data sets.

R
Specifies that the data set is for reading cards.

T
Specifies that the two-line option is used. The two-line print option allows two lines of data to be printed on the card (lines 1 and 3). If **T** is not specified, the multiline print option is used; this allows printing on all 25 possible print lines. In either case, the data printed may be the same as the data punched in the card, or it may be entirely different data.

W
Specifies that the data set is for printing. See the description of the character **X** for associated punch and print data sets.

X
Specifies that an associated data set is opened for output for both punching and printing. Coding the character **X** is used to distinguish the 3525 printer output data set from the 3525 punch output data set.

Note: If data protection is specified, the data protection image (DPI) must be specified in the FCB subparameter of the DD statement for the data set.

DEV D=RD

[,MODE=[C | E][O | R]]

[,STACK={1 | 2}]

[,FUNC={I | P | PW[XT] | R | RP[D] | RW[T] | RWP[XT][D] | W[T]}]

RD

Specifies that the data control block is used with a card reader or card read punch. If **RD** is specified, the data control block cannot be used with any other device type. When **RD** is coded, the following optional operands can be specified:

MODE=[C | E][O | R]

The **MODE** operand specifies the mode of operation for the card reader. The following describes the characters that can be specified:

C
Specifies that the cards to be read are in card image mode. In card image mode, the 12 rows of each card column are read into two consecutive bytes of virtual storage. Rows 12 through 3 are read into the low-order 6 bits of one byte, and rows 4 through 9 are read into the low-order 6 bits of the following byte.

E
Specifies that the cards to be read contain data in EBCDIC code.

O
Specifies that the program runs in optical mark read mode (3505 card reader).

R
Specifies that the program runs in read-column-eliminate mode (3505 card reader and 3525 card punch, read feature).

Note: If the **MODE** operand for a 3505 or 3525 is specified in the DCB subparameter of a DD statement, either **C** or **E** must be specified if **R** or **O** is specified.

STACK={1 | 2}

The **STACK** operand specifies the stacker bin into which the card is placed after reading is completed. If this operand is omitted, stacker number 1 is used. The following describes the characters that can be specified:

1

Specifies stacker number 1.

2

Specifies stacker number 2.

FUNC={I | P | PW[XT] | R | RP[D] | RW[T] | RWP[XT][D] | W[T]}

The **FUNC** operand defines the type of 3525 card punch data sets that are used. If the **FUNC** operand is omitted from all sources, a data set opened for input defaults to read only, and a data set opened for output defaults to punch only. The following describes the characters that can be specified in the **FUNC** operand:

D

Specifies that the data protection option is to be used. The data protection option prevents punching information into card columns that already contain data. When the data protection option is used, an 80-byte data protection image (DPI) must have been previously stored in SYS1.IMAGELIB. Data protection applies only to the output punch portion of a read and punch or read, punch, and print operation.

I

Specifies that the data in the data set is to be punched into cards and printed on the cards; the first 64 characters are printed on line 1 of the card and the remaining 16 characters are printed on line 3.

P

Specifies that the data set is for punching cards. See the description of the character **X** for associated punch and print data sets.

R

Specifies that the data set is for reading cards.

T

Specifies that the two-line option is used. The two-line print option allows two lines of data to be printed on the card (lines 1 and 3). If **T** is not specified, the multiline print option is used; this allows printing on all 25 possible print lines. In either case, the data printed may be the same as the data punched in the card, or it may be entirely different data.

W

Specifies that the data set is for printing. See the description of the character **X** for associated punch and print data sets.

X

Specifies that an associated data set is opened for output for both punching and printing. Coding the character **X** is used to distinguish the 3525 printer output data set from the 3525 punch output data set.

Note: If data protection is specified, the data protection image (DPI) must be specified in the FCB subparameter of the DD statement for the data set.

Source: The **DEV** operand can be supplied only in the DCB macro instruction. However, the optional operands can be supplied in the DCB macro instruction, the DCB subparameter of a DD statement, or by the problem program before completion of the data control block exit routine.

DSORG={PS | PSU}

The **DSORG** operand specifies the organization of the data set and if the data set contains any location-dependent information that would make it unmovable. The following can be specified in the **DSORG** operand:

PS

Specifies a physical sequential data set.

PSU

Specifies a physical sequential data set that contains location-dependent information.

Source: The **DSORG** operand must be coded in the DCB macro instruction.

EODAD=*relexp*

The **EODAD** operand specifies the address of the routine given control when the end of an input data set is reached. Control is given to this routine when a **GET** macro instruction is issued and there are no additional records to be retrieved. If the record format is **RECFM=FS** or **FBS** the end-of-data condition is sensed when file mark is read or if more data is requested after reading a truncated block. If the end of the data set has been reached but no **EODAD** address has been supplied to the data control block, or if a **GET** macro instruction is issued after an end-of-data exit is taken, the task is abnormally terminated. For additional information on the **EODAD** routine, see *OS/VS Data Management Services Guide*.

Source: The **EODAD** operand can be supplied in the DCB macro instruction or by the problem program before the end of the data set has been reached.

EROPT={ACC | SKP | ABE}

The **EROPT** operand specifies the action taken by the system when an uncorrectable input/output data validity error occurs and no error analysis (**SYNAD**) routine address has been provided, or it specifies the action taken by the system after the error analysis routine has returned control to the system with a **RETURN** macro instruction. The specified action is taken for input operations or for output operations to a printer.

Uncorrectable input/output errors resulting from channel operations or direct-access operations that make the next record inaccessible cause the task to be abnormally terminated regardless of the action specified in the **EROPT** operand.

ACC

Specifies that the problem program accepts the block causing the error. This action can be specified when a data set is opened for **INPUT**, **RDBACK**, **UPDAT**, or **OUTPUT** (**OUTPUT** applies to printer data sets only).

SKP

Specifies that the block that caused the error is skipped. Specifying **SKP** also causes the buffer associated with the data block to be released. This action can be specified when a data set is opened for **INPUT**, **RDBACK**, or **UPDAT**.

ABE

Specifies that the error results in the abnormal termination of the task. This action can be specified when the data set is opened for **INPUT**, **OUTPUT**, **RDBACK**, or **UPDAT**.

If the **EROPT** operand is omitted, the **ABE** action is assumed.

Source: The **EROPT** operand can be specified in the DCB macro instruction, in the DCB subparameter of a **DD** statement, or by the problem program at any time. The problem program can also change the action specified at any time.

EXLST=*relexp*

The **EXLST** operand specifies the address of the problem program exit list. The **EXLST** operand is required if the problem program requires additional processing for user labels, user totaling, data control block exit routine, end-of-volume, block count exits, to define a forms control buffer (FCB) image, or to use the DCB ABEND exit for ABEND condition analysis.

Refer to Appendix D of this publication for the format and requirements of exit list processing. For additional information about exit routine processing, refer to *OS/VS Data Management Services Guide*.

Source: The **EXLST** operand can be supplied in the DCB macro instruction or by the problem program any time before the exit is required by the problem program.

LRECL={ *absexp* | **X**}

The **LRECL** operand specifies the length, in bytes, for fixed-length logical records, or it specifies the maximum length, in bytes for variable-length or undefined-length (output only) logical records. The value specified in the **LRECL** operand cannot exceed the value specified in the **BLKSIZE** operand except when variable-length spanned records are used.

For fixed-length records that are unblocked, the value specified in the **LRECL** operand must be equal to the value specified in the **BLKSIZE** operand. For blocked fixed-length records, the value specified in the **LRECL** operand must be evenly divisible into the value specified in the **BLKSIZE** operand.

For variable-length logical records, the value specified in the **LRECL** operand must include the maximum data length (up to 32,752) plus four bytes for the record-descriptor word (RDW).

For undefined-length records, the problem program must insert the actual logical record length into the DCBLRECL field before writing the record, or the maximum length record will be written.

For variable-length spanned records, the logical record length (**LRECL**) can exceed the value specified in the **BLKSIZE** operand, and a variable-length spanned record can exceed the maximum block size (32,760 bytes). When the logical record length exceeds the maximum block size, **LRECL=X** must be specified and GET or PUT locate mode must be used.

Source: The **LRECL** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

MACRF= {(G|M|L|T|D){C}}

{(P|M|L|T|D){C}}

{(G|M|L|T|D){C},P{M|L|T|D}{C}}

The **MACRF** operand specifies the type of macro instructions (GET, PUT or PUTX, CNTRL, RELSE, and TRUNC) and the transmittal modes (move, locate, data, and substitute) that are used with the data set being created or processed. The operand can be coded in any of the combinations shown above; the following describes the characters that can be coded:

C

Specifies that the CNTRL macro instruction is used with the data set. If the CNTRL macro instruction is specified, the data set should be for a card reader (stacker selection) or printer (carriage and spacing control). The CNTRL option can be specified with GET in the move mode only.

D

Specifies that the data transmittal mode is used (only the data portion of a record is moved to or from the work area). Data mode is used only with variable-length spanned records.

G

Specifies that GET macro instructions are used. Specifying **G** also provides the routines that allow the problem program to issue RELSE macro instructions.

L

Specifies that the locate transmittal mode is used; the system provides the address of the buffer containing the data.

M

Specifies that the move transmittal mode is used; the system moves the data from the buffer to the work area in the problem program.

P

Specifies that PUT or PUTX macro instructions are used. Specifying **P** also provides the routines that allow the problem program to issue TRUNC macro instructions.

T

Specifies that the substitute transmittal mode is used; the system substitutes a buffer for a work area contained in the problem program.

Note: For data sets on paper tape that are processed by QSAM, only **MACRF=(GM)** can be specified.

Source: The **MACRF** operand can be supplied only in the DCB macro instruction.

OPTCD= {B}

{T}

{U[C]}

{C[T][B]}

{H[Z][B]}

{W[C][T][B]}

{Z[C][T][B]}

{Q[C][B][T | Z]}

The **OPTCD** operand specifies the optional services used with the QSAM data set. Two of the optional services, **OPTCD=B** and **OPTCD=H**, cannot be specified in the DCB macro instruction. They are requested in the DCB subparameter of a DD statement. Since all optional services codes must be supplied by the same source, the **OPTCD** operand must be omitted from the DCB macro instruction if either of these options is requested in a DD statement. The following describes the characters that can be specified:

C

Requests that chained scheduling be used. **OPTCD=C** cannot be specified when either **BFTEK=A** or **BFTEK=R** is specified for the same data control block. Also, chained scheduling cannot be specified for associated data sets or printing on a 3525. OS/VS1 supports chained scheduling in nonpageable storage only. If chained scheduling is requested in pageable storage, the request is ignored and normal scheduling is substituted.

For OS/VS2, chained scheduling is supported for pageable and nonpageable storage.

Q

Requests that ASCII tape records in an input data set be converted to EBCDIC code when the input record has been read, or an output record in EBCDIC code be converted to ASCII code before the record is written. For further information on this conversion, see “Variable-Length Records—Format D” in *OS/VS Data Management Services Guide*.

T

Requests the user totaling facility. If this facility is requested, the EXLST operand should specify the address of an exit list to be used. T cannot be specified for a SYSIN or SYSOUT data set.

U

Specified only for a printer with the universal-character-set feature. This option unblocks data checks (permits them to be recognized as errors) and allows analysis by the appropriate error analysis routine (SYNAD routine). If the U option is omitted, data checks are not recognized as errors.

W

Specifies that the system performs a validity check for each record written on the direct-access device being used.

Z

For magnetic tape, input only, the Z option requests the system to shorten its normal error recovery procedure to consider a data check as a permanent I/O error after five unsuccessful attempts to read a record. This option is available only if it is selected when the operating system is generated. **OPTCD=Z** is used when a tape is known to contain errors and there is no need to process every record. The error analysis routine (SYNAD) should keep a count of permanent errors and terminate processing if the number becomes excessive.

For direct-access devices only, the Z option requests the system to use the search direct option to accelerate the input operations for a data set. **OPTCD=Z** cannot be specified when **RECFM=UT, FS, FBT, VS, or VBS**.

Note: The following describes the optional services that can be specified in the DCB subparameter of a DD statement. If either of these options is requested, the complete **OPTCD** operand must be supplied in the DD statement.

B

If **OPTCD=B** is specified in the DCB subparameter of a DD statement, it forces the end-of-volume (EOV) routine to disregard the end-of-file recognition for magnetic tape. When this occurs, the EOV routine uses the number of volume serial numbers to determine end of file. For an input data set on a standard labeled (SL or AL) tape, the EOV routine will treat EOF labels as EOV labels until the volume serial list is exhausted. When all the volumes have been read, control is passed to the user's end-of-data routine. This option allows SL or AL tapes to be read out of volume sequence or to be concatenated to another tape using one DD statement.

H

If **OPTCD=H** is specified in the DCB subparameter of a DD statement, it specifies that the DOS/OS interchange feature is being used with the data set.

RECFM= {**U**[**T**][**A** | **M**]}
 {**V**[**B**[**S**][**T**] | **S**[**T**] | **T**][**A** | **M**]}
 {**D**[**B**][**A**]}
 {**F**[**B** | **S** | **T** | **BS** | **BT**][**A** | **M**]}

The **RECFM** operand specifies the record format and characteristics of the data set being created or processed. All record formats can be used in QSAM. The following describes the characters that can be specified:

A

Specifies that the records in the data set contain American National Standards Institute (ANSI) control characters. Refer to Appendix E for a description of control characters.

B

Specifies that the data set contains blocked records.

D

Specifies that the data set contains variable-length ASCII tape records. See **OPTCD=Q** and the **BUFOFF** operand for a description of how to specify ASCII data sets.

F

Specifies that the data set contains fixed-length records.

M

Specifies that the records in the data set contain machine code control characters. Refer to Appendix E for a description of control characters. **RECFM=M** cannot be used with ASCII data sets.

S

For fixed-length records, **S** specifies that the records are written as standard blocks; the data set does not contain any truncated blocks or unfilled tracks, with the exception of the last block or track in the data set.

For variable-length records, **S** specifies that a record can span more than one block. If spanned records are used, exchange buffering (**BFTEK=E**) cannot be specified.

Do not code **S** to retrieve records from a data set that was created using a **RECFM** other than standard.

T

Specifies that the track-overflow feature is used with the data set. The track-overflow feature allows a record to be written partially on one track and the remainder of the record on the following track (if required). Chained scheduling (**OPTCD=C**) and exchange buffering (**BFTEK=E**) cannot be used if the track-overflow feature is used.

U

Specifies that the data set contains undefined-length records.

V

Specifies that the data set contains variable-length records.

Notes:

- **RECFM=V** cannot be specified for a card reader data set or an ASCII tape data set.
- **RECFM=VS** or **VBS** cannot be specified for a SYSIN data set.

Source: The **RECFM** operand can be supplied in the DCB macro instruction, in the DCB subparameter of a DD statement, by the problem program before completion of the data control block exit routine, or by the data set label of an existing data set.

SYNAD=*relexp*

The **SYNAD** operand specifies the address of the error analysis routine given control when an uncorrectable input/output error occurs. The contents of the registers when the error analysis routine is given control are described in Appendix A of this publication.

The error analysis routine must not use the save area pointed to by register 13, because this area is used by the system. The system does not restore registers when it regains control from the error analysis routine. The error analysis routine can issue a **RETURN** macro instruction that uses the address in register 14 to return control to the system.

If the error condition was the result of a data-validity error, the control program takes the action specified in the **EROPT** operand; otherwise, the task is abnormally terminated. The control program takes these actions when the **SYNAD** operand is omitted or when the error analysis routine returns control.

Source: The **SYNAD** operand can be supplied in the DCB macro instruction or by the problem program. The problem program can also change the error routine address at any time.

DCBD—Provide Symbolic Reference to Data Control Blocks (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)

The DCBD macro instruction is used to generate a dummy control section that provides symbolic names for the fields in one or more data control blocks. The names and attributes of the fields appear as part of the description of each data control block in Appendix F of this publication. Attributes of the symbolically named fields in the dummy section are the same as the fields in the data control blocks, with the exception of fields containing 3-byte addresses. The symbolically named fields containing 3-byte addresses have length attributes of four and are aligned on fullword boundaries.

The labels generated by the DCBD macro should not be defined within a user program. The macro labels are structured as DCBxxxx where DCB are the first three characters and xxxxx are 1-5 alphameric characters.

The name of the dummy control section generated by a DCBD macro instruction is IHADCB. The use of any of the symbolic names provided by the dummy section must be preceded by a USING instruction specifying IHADCB and a dummy section base register (which contains the address of the actual data control block). The DCBD macro instruction can only be issued once within any assembled module; however, the resulting symbolic names can be used for any number of data control blocks by changing the address in the dummy section base register. The DCBD macro instruction can be coded at any point in a control section; if coded at any point other than at the end of a control section; however, the control section must be resumed by coding a CSECT instruction.

The DCBD macro instruction is written as follows:

b	DCBD	[DSORG=({GS [BS][,DA][,IS][,LR][,PO][,PS][,QS]}) [,DEVD=([DA][,PC][,PR][,PT][,RD][,TA] [,MR][,OR])]
---	------	--

DSORG=({GS | [BS][,DA][,IS][,LR][,PO][,PS][,QS]})

The **DSORG** operand specifies the types of data control blocks for which symbolic names are provided. If the **DSORG** operand is omitted, the **DEVD** operand is ignored, and symbolic names are provided only for the “foundation block” portion that is common to all data control blocks. One or more of the following pairs of characters can be specified (each pair of characters must be separated by a comma):

BS

Specifies a data control block for a sequential data set and basic access method.

DA

Specifies a data control block for a direct data set.

IS

Specifies a data control block for an indexed sequential data set.

LR

Specifies a dummy section for the logical record length field (DCBLRECL) only.

PO

Specifies a data control block for a partitioned data set.

PS

Specifies a data control block for a sequential data set. **PS** includes both **BS** and **QS**.

QS

Specifies a data control block for a sequential data set and queued access method.

GS

Specifies a data control block for graphics; this operand cannot be used in combination with any of the above.

DEVD=[DA],[PC],[PR],[PT],[RD],[TA],[MR],[OR]

The **DEVD** operand specifies the types of devices on which the data set can reside. If the **DEVD** operand is omitted and a sequential data set is specified in the **DSORG** operand, symbolic names are provided for all of the device types listed below. One or more of the following pairs of characters can be specified; each pair of characters must be separated by a comma:

DA

Direct-access device

PC

Online punch

PR

Online printer

PT

Paper tape

RD

Online card reader or read punch feed

TA

Magnetic tape

MR

Magnetic character reader

OR

Optical character reader

ESETL—End Sequential Retrieval (QISAM)

The ESETL macro instruction ends the sequential retrieval of data from an indexed sequential data set and causes the buffers associated with the specified data control block to be released. An ESETL macro instruction must separate SETL macro instructions issued for the same data control block.

The ESETL macro instruction is written as follows:

[<i>symbol</i>]	ESETL	<i>dcb address</i>
-------------------	-------	--------------------

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block opened for the indexed sequential data set being processed.

FEOV—Force End of Volume (BSAM and QSAM)

The FEOV macro instruction causes the system to assume an end-of-volume condition, and causes automatic volume switching. Volume positioning for magnetic tape can be specified by the option operand. If no option is coded, the positioning specified in the OPEN macro instruction is used. Output labels are created as required and new input labels are verified. The standard exit routines are given control as specified in the data control block exit list. For BSAM, all input and output operations must be tested for completion before the FEOV macro instruction is issued. The end-of-data-set (EODAD) routine is given control if an input FEOV macro instruction is issued for the last volume of an input data set. FEOV is ignored if issued for a SYSIN or SYSOUT data set.

The FEOV macro instruction is written as follows:

[<i>symbol</i>]	FEOV	<i>dcb address</i> [,REWIND ,LEAVE]
-------------------	-------------	--

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for an opened sequential data set.

The following operands request optional services:

REWIND

Requests that the system position the tape at the load point regardless of the direction of processing.

LEAVE

Requests that the system position the tape at the logical end of the data set on that volume; this option causes the tape to be positioned at a point after the tapemark that follows the trailer labels. Note that multiple tape units must be available to achieve this positioning. If only one tape unit is available, its volume is rewound and unloaded.

Note: If an FEOV macro is issued for a multivolume data set with spanned records that is being read using QSAM, errors may occur when the next GET macro is issued following an FEOV macro if the first segment on the new volume is not the first segment of a record. The errors include duplicate records, program checks in the user program, and invalid input from the variable spanned data set.

FIND—Establish the Beginning of a Data Set Member (BPAM)

The FIND macro instruction causes the system to use the address of the first block of a specified partitioned data set member as the starting point for the next READ macro instruction for the same set. All previous input and output operations that specified the same data control block must have been tested for completion before the FIND macro instruction is issued.

The FIND macro instruction is written as follows:

[<i>symbol</i>]	FIND	<i>dcb address</i> , { <i>name address</i> , D <i>relative address list</i> , C }
-------------------	-------------	--

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the opened partitioned data set being processed.

name address—RX-Type Address, (2-12), or (0)

The *name address* operand specifies the address of an 8-byte field that contains the data set member name. The name must start in the first byte and be padded on the right (if necessary) to complete the eight bytes.

D

Specifies that only a member name has been supplied, and the access method must search the directory of the data set indicated in the data control block to find the location of the member.

relative address list—RX-Type Address, (2-12), or (0)

The *relative address list* operand specifies the address of the area that contains the relative address (TTRK) for the beginning of a data set member. The relative address can be a list entry completed by using a BLDL macro instruction for the data set being processed, or the relative address can be supplied by the problem program.

C

Specifies that a relative address has been supplied, and no directory search is required. The relative address supplied is used directly by the access method for the next input operation.

Completion Codes

For *relative address list*, **C**, when the system returns control to the problem program, the low-order byte of register 15 contains the following return code; the three high-order bytes of register 15 are set to zero.

relative address list, **C**

00 — At all times. If the relative address is in error, execution of the next CHECK macro instruction causes control to be passed to the error analysis (SYNAD) routine.

For *name address, D*, when the system returns control to the problem program, the low-order byte of register 15 contains a *return* code and the low-order byte of register 0 contains a *reason* code. The three high-order bytes of both registers are set to zero.

name address, D

Hexadecimal Codes		
Return (15)	Reason (0)	Meaning
00	00	Successful execution.
04	00	Name not found.
08	00	Permanent I/O error found during directory search.
08	04	Insufficient virtual storage available.

FREEBUF—Return a Buffer to a Pool (BDAM, BISAM, BPAM, and BSAM)

The FREEBUF macro instruction causes the system to return a buffer to the buffer pool assigned to the specified data control block. The buffer must have been acquired using a GETBUF macro instruction.

The FREEBUF macro instruction is written as follows:

[<i>symbol</i>]	FREEBUF	<i>dcb address</i> , <i>register</i>
-------------------	----------------	---

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for an opened data set to which the buffer pool has been assigned.

register—(2-12)

The *register* operand specifies one of registers 2 through 12 that contains the address of the buffer being returned to the buffer pool.

FREEDBUF—Return a Dynamically Obtained Buffer (BDAM and BISAM)

The FREEDBUF macro instruction causes the system to return a buffer to the buffer pool assigned to the specified data control block. The buffer must have been acquired through dynamic buffering; that is, by coding 'S' for the *area address* operand in the associated READ macro instruction.

Note: A buffer acquired dynamically can also be released by a WRITE macro instruction; refer to the description of the WRITE macro instruction for BDAM or BISAM.

The FREEDBUF macro instruction is written as follows:

[<i>symbol</i>]	FREEDBUF	<i>decb address</i> ,{ K D } , <i>dcb address</i>
-------------------	-----------------	---

decb address—RX-Type Address, (2-12), or (0)

The *decb address* operand specifies the address of the data event control block (DECB) used or created by the READ macro instruction that acquired the buffer dynamically.

K

Specifies that BISAM is being used.

D

Specifies that BDAM is being used.

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the opened data set being processed.

FREEPOOL—Release a Buffer Pool (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)

The FREEPOOL macro instruction causes an area of storage, previously acquired for a buffer pool for a specified data control block, to be released. The area must have been acquired either automatically (except when dynamic buffer control is used) or by the execution of a GETPOOL macro instruction. For queued access methods, the FREEPOOL macro instruction must not be issued until after a CLOSE macro instruction has been issued for all the data control blocks using the buffer pool. For basic access methods, the FREEPOOL macro instruction can be issued as soon as the buffers are no longer required. A buffer pool should be released only once, regardless of the number of data control blocks sharing the buffer pool.

The FREEPOOL macro instruction is written as follows:

<i>[symbol]</i>	FREEPOOL	<i>dcb address</i>
-----------------	-----------------	--------------------

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of a data control block to which the buffer pool has been assigned.

GET—Obtain Next Logical Record (QISAM)

The GET macro instruction causes the system to retrieve the next record. Control is not returned to the problem program until the record is available.

The GET macro instruction is written as follows:

[<i>symbol</i>]	GET	<i>dcb address</i> [, <i>area address</i>]
-------------------	-----	--

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the opened input data set being retrieved.

area address—RX-Type Address, (2-12), or (0)

The *area address* operand specifies the storage address into which the system is to move the record (move mode only). Either the move or locate mode can be used with QISAM, but they must not be mixed within the specified data control block. The following describes operations for move and locate modes:

Locate Mode: If the locate mode has been specified in the data control block, the *area address* operand must be omitted. The system returns the address of the buffer segment containing the record in register 1.

Move Mode: If the move mode has been specified in the data control block, the *area address* operand must specify the address in the problem program into which the system will move the record. If the *area address* operand is omitted, the system assumes that register 0 contains the area address. When control is returned to the problem program, register 0 contains the area address, and register 1 contains the address of the data control block.

Notes:

1. The end-of-data-set (EODAD) routine is given control if the end of the data set is reached; the data set may be closed if processing is completed, or an ESETL macro must be issued before a SETL macro to continue further input processing.
2. The error analysis (SYNAD) routine is given control if the input operation could not be completed successfully. The contents of the general registers when control is given to the SYNAD routine are described in Appendix A.
3. When the key of an unblocked fixed-length record is retrieved with the data, the address of the key is returned as follows (see the SETL macro instruction):

Locate Mode: The address of the key is returned in register 0.

Move Mode: The key appears in front of the record in your buffer area.

4. If a GET macro instruction is issued for a data set and the previous request issued for the same data set was an OPEN, ESETL, or unsuccessful SETL (no record found), a SETL B (key and data) is invoked automatically, and the first record in the data set is returned.

GET—Obtain Next Logical Record (QSAM)

The GET macro instruction causes the system to retrieve the next record. Various modes are available and are specified in the DCB macro instruction. In the locate mode, the GET macro instruction locates the next sequential record or record segment to be processed. The system returns the address of the record in register 1 and places the length of the record or segment in the logical-record-length (DCBLRECL) field of the data control block. The user can process the record within the input buffer or move the record to a work area.

In the move mode, the GET macro instruction moves the next sequential record to the user's work area. This work area must be big enough to contain the largest logical record of the data set and its record-descriptor word (variable-length records). The system returns the address of the work area in register 1. (This feature provides compatibility with the substitute mode GET.) The record length is placed in the DCBLRECL field. The move mode can be used only with simple buffering.

In the data mode, which is available only for variable-length spanned records, the GET macro instruction moves only the data portion of the next sequential record to the user's work area. The **TYPE=P** operand cannot be used with data mode.

In the substitute mode, the GET macro instruction transfers ownership of the next sequential record in a data set from the system to the user. In return, the ownership of a work area is transferred from the user to the system for future use as an input buffer. There is no movement of data. The address of an input buffer containing the record is returned to the user in register 1 after the instruction is executed. The system returns the record length in the DCBLRECL field. For undefined-length records, the DCBLRECL field is equal to the BLKSIZE field for chained scheduling. The substitute mode can be used only with exchange buffering and cannot be used with variable-length records. The **TYPE=P** operand cannot be used with substitute mode.

If the ASCII translation routines are included when the operating system is generated, translation can be requested by coding LABEL=(,AL) or (,AUL) in the DD statement, or it can be requested by coding OPTCD=Q in the DCB macro instruction or DCB subparameter of the DD statement. When translation is requested, all QSAM records whose record format (RECFM operand) is F, FB, D, DB, or U are automatically translated from ASCII code to EBCDIC code as soon as the input buffer is full. For translation to occur correctly, all input data must be in ASCII code.

The GET macro instruction is written as follows:

[<i>symbol</i>]	GET	<i>dcb address</i> <i>pdab address</i> [, <i>area address</i>] [, TYPE=P]
-------------------	------------	--

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the opened input data set being retrieved.

pdab address—RX-Type Address, (2-12), or (1)

The *pdab address* operand specifies the address of the parallel data access block for the opened input data sets from which a record is to be retrieved. When *pdab address* is used, **TYPE=P** must be coded.

area address—RX-Type Address, (2-12), or (0)

The *area address* operand specifies the address of an area into which the system is to move the record (move or data mode), or it specifies the address of an area to be exchanged for the buffer containing the record (substitute mode). The move, locate, data, or substitute mode can be used with QSAM, but they must not be mixed within the specified data control block. If the *area address* operand is omitted in the move, data, or substitute mode, the system assumes that register 0 contains the area address. The following describes the operation of the four modes:

Locate Mode: If the locate mode has been specified in the data control block, the *area address* operand must be omitted. The system returns the address of the beginning buffer segment containing the record in register 1. If the data set is open for RDBACK, register 1 will point to the end of the buffer segment rather than the beginning.

When retrieving variable-length spanned records, the records are obtained one segment at a time. The problem program must retrieve additional segments by issuing subsequent GET macro instructions, except when a logical record interface is requested (by specifying BFTEK=A in the DCB macro instruction or by issuing a BUILDRCDD macro instruction.) In this case, the control program retrieves all record segments and assembles the segments into a complete logical record. The system returns the address of this record area in register 1. To process a record when the logical record length is greater than 32,756 bytes, LRECL=X must be specified in the data control block, and the problem program must assemble the segments into a complete logical record.

Move Mode: If the move mode has been specified in the data control block, the *area address* operand specifies the beginning address of an area in the problem program into which the system will move the record. If the data set is open for RDBACK, the *area address* operand specifies the ending address of an area in the problem program.

For variable-length spanned records, the system constructs the record-descriptor word in the first four bytes of the area and assembles one or more segments into the data portion of the logical record; the segment descriptor words are removed.

Data Mode: If the data mode has been specified in the data control block (data mode can be specified for variable-length spanned records only), the *area address* operand specifies the address of the area in the problem program into which the system will move the data portion of the logical record; a record-descriptor word is not constructed when data mode is used. The TYPE=P operand cannot be used with data mode.

Substitute Mode: If the substitute mode is specified in the data control block, the *area address* operand specifies the address of an area in the problem program that will be exchanged for the buffer containing the record. The system returns the address of the buffer containing the record in register 1. The TYPE=P operand cannot be used with substitute mode.

Note: If spanned records extend across volumes, errors may occur when using the GET macro if a volume which begins with a middle or last record segment is mounted first, or if an FEOV macro is issued followed by a GET macro. QSAM cannot begin reading from the middle of the record. (This applies to move mode, data mode, and locate mode if logical record interface is specified.)

TYPE=P—Coded as shown

The **TYPE=P** and *pdab address* operands are used to retrieve a record from a queue of input data sets that have been opened. The open and close routines add and delete DCB addresses in the queue. The DCB from which a record is retrieved can be located from information in the PDAB. For this purpose, the formatting macro, PDABD, should be used.

GET Routine Exits

The end-of-data-set (EODAD) routine is given control if the end of the data set is reached; the data set must be closed. Issuing a GET macro instruction in the EODAD routine results in abnormal termination of the task.

The error analysis (SYNAD) routine is given control if the input operation could not be completed successfully. The contents of the general registers when control is given to the SYNAD routine are described in Appendix A.

GETBUF—Obtain a Buffer (BDAM, BISAM, BPAM, and BSAM)

The GETBUF macro instruction causes the control program to obtain a buffer from the buffer pool assigned to the specified data control block and to return the address of the buffer in a designated register. The BUFCB field of the data control block must contain the address of the buffer pool control block when the GETBUF macro instruction is issued. The system returns control to the instruction following the GETBUF macro instruction. The buffer obtained must be returned to the buffer pool using a FREEBUF macro instruction.

The GETBUF macro instruction is written as follows:

[<i>symbol</i>]	GETBUF	<i>dcb address</i> , <i>register</i>
-------------------	---------------	---

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block that contains the buffer pool control block address.

register—(2-12)

The *register* operand specifies one of the registers 2 through 12 in which the system is to place the address of the buffer obtained from the buffer pool. If no buffer is available, the contents of the designated register are set to zero.

GETPOOL—Build a Buffer Pool (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)

The GETPOOL macro instruction causes a buffer pool to be constructed in a storage area acquired by the system. The system places the address of the buffer pool control block in the BUFCB field of the data control block. The GETPOOL macro instruction must be issued either before an OPEN macro instruction is issued or during the data control block exit routine for the specified data control block.

The GETPOOL macro instruction is written as follows:

[<i>symbol</i>]	GETPOOL	<i>dcb address</i> ,{ <i>number of buffers</i> , <i>buffer length</i> (0)}
-------------------	----------------	---

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block to which the buffer pool is assigned. Only one buffer pool can be assigned to a data control block.

number of buffers—symbol, decimal digit, absexp, or (2-12)

The *number-of-buffers* operand specifies the number of buffers in the buffer pool up to a maximum of 255.

buffer length—symbol, decimal digit, absexp, or (2-12)

The *buffer length* operand specifies the length, in bytes, of each buffer in the buffer pool. The value specified for the buffer length must be a doubleword multiple; otherwise the system rounds the value specified to the next higher doubleword multiple. The maximum length that can be specified is 32,760 bytes. For QSAM, the *buffer length* must be at least as large as the value specified in the block size (DCBBLKSI) field in the data control block.


(0)—Coded as shown

The number of buffers and buffer length can be specified in general register 0. If (0) is coded, register 0 must contain the binary values for the number of buffers and buffer length as shown in the following illustration:

Register 0

	Number of Buffers		Buffer Length	
Bits:	0	15	16	31

The following illustration shows the format of the buffer pool. The buffer pool and the associated storage area are released by issuing a **FREEPOOL** macro instruction after issuing a **CLOSE** macro instruction for the data set indicated in the specified data control block.

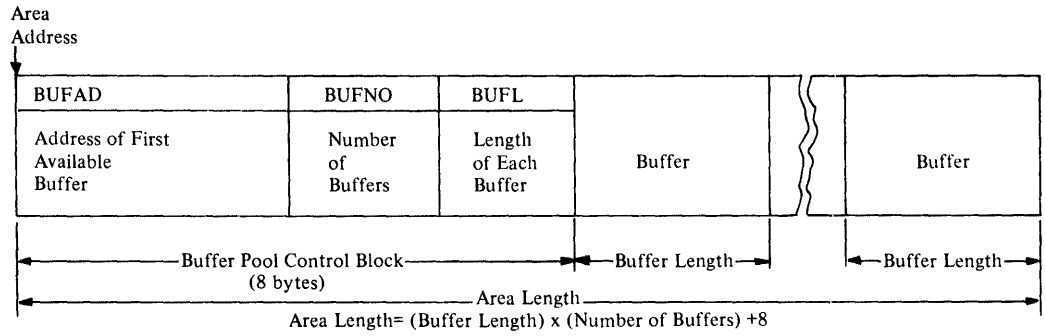

NOTE—Provide Relative Position (BPAM and BSAM—Tape and Direct Access Only)

The NOTE macro instruction causes the system to return the relative position of the last block read from or written into a data set. All input and output operations using the same data control block must be tested for completion before the NOTE macro instruction is issued.

The capability of using the NOTE macro instruction is automatically provided when a partitioned data set is used (DSORG=PO or POU), but when a sequential data set (BSAM) is used, the use of NOTE/POINT macro instructions must be indicated in the MACRF operand of the DCB macro instruction. The relative position, in terms of the current volume, is returned in register 1 as follows:

Magnetic Tape: The block number is in binary, right-adjusted in register 1 with high-order bits set to zero. Do not use a NOTE macro instruction for tapes without standard labels when:

- The data set is opened for RDBACK (specified in the OPEN macro instruction) or
- The DISP parameter of the DD statement for the data set specifies DISP=MOD.

Direct-Access Device: TTRz format, where:

TT is a 2-byte relative track number.

R is a 1-byte block (record) number on the track indicated by TT.

z is a byte set to zero.

For VS1 SYSIN data sets, register 1 returns a 4-byte relative block address for the last record read. The NOTE macro instruction cannot be used for VS2 SYSIN data sets, or for VS1 or VS2 SYSOUT data sets.

Note: When a direct-access device is being used, the amount of remaining space on the track is returned in register 0 if a NOTE macro instruction follows a WRITE macro instruction; if a NOTE macro instruction follows a READ or POINT macro instruction, the track capacity of the direct-access device is returned in register 0.

The NOTE macro instruction is written as follows:

[symbol]	NOTE	dcb address
----------	------	-------------

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block opened for the partitioned or sequential data set being processed.

OPEN—Logically Connect a Data Set (BDAM, BISAM, BPAM, BSAM, QISAM, and QSAM)

The OPEN macro instruction causes the specified data control block(s) to be completed and the data set(s) identified in the data control block(s) to be prepared for processing. Input labels are analyzed and output labels are created. Control is given to exit routines as specified in the data control block exit list. The processing method (option 1) is designated to provide correct volume positioning for the data set and define the processing mode (INPUT, OUTPUT, etc.) for the data set(s). Final volume positioning (when volume switching occurs) can be specified (option 2) to override the positioning implied by the DD statement DISP parameter. Option 2 applies only to volumes in a multivolume data set other than the last volume. Any number of data control block addresses and associated options may be specified in the OPEN macro instruction.

If associated data sets for a 3525 card punch are being opened, all associated data sets must be open before an I/O operation is initiated for any of the data sets. For a description of associated data sets, refer to *OS/VS Data Management Services Guide*.

To support DEB validity checking in OS/VS, an OPEN macro instruction must be issued for every data extent block (DEB) created.

The standard form of the OPEN macro instruction is written as follows (the list and execute forms are shown following the description of the standard form):

[symbol]	OPEN	(dcb address,[(options)], ...)
----------	------	--------------------------------

dcb address—A-Type Address or (2-12)

The *dcb address* operand(s) specifies the address of the data control block(s) for the data set(s) to be prepared for processing.

options

The *options* operands shown in the following illustration indicate the volume positioning available based on the device type and access method being used. If option 1 is omitted, INPUT is assumed. If option 2 is omitted, DISP is assumed. Option 1 must be coded if option 2 is coded. Option 2 is ignored for SYSIN and SYSOUT data sets. Options 1 and 2 are ignored for BISAM and QISAM (in the scan mode), and the data control block indicates the operation. OUTPUT or OUTIN must be specified when creating a data set.

3525 card punch
 his main DEB from
 an unauthorized program

ACCESS METHOD	DEVICE TYPE					
	Magnetic tape		Direct access		Other Types	
	Option 1	Option 2	Option 1	Option 2	Option 1	Option 2
QSAM	[INPUT] [OUTPUT] [RDBACK]	[,REREAD] [,LEAVE] [,DISP]	[INPUT] [OUTPUT] [UPDAT]	[,REREAD] [,LEAVE] [,DISP]	[INPUT] [OUTPUT]	—
BSAM	[INPUT] [OUTPUT] [INOUT] [OUTIN] [RDBACK]	[,REREAD] [,LEAVE] [,DISP]	[INPUT] [OUTPUT] [INOUT] [OUTIN] [UPDAT]	[,REREAD] [,LEAVE] [,DISP]	[INPUT] [OUTPUT]	—
QISAM (Load Mode)	—	—	[OUTPUT]	—	—	—
BPAM, BDAM	—	—	[INPUT] [OUTPUT] [UPDAT]	—	—	—

The following describes the options shown in the preceding illustration. All option operands are coded as shown.

Option 1	Meaning
INPUT	Input data set.
INOUT	The data set is first used for input and, without reopening, it is used as an output data set. The data set is processed as INPUT for a SYSIN data set or if LABEL=(,,IN) is specified in the DD statement.
OUTPUT	Output data set (for BDAM, OUTPUT is equivalent to UPDAT).
OUTIN	The data set is first used for output and, without reopening, it is used as an input data set. The data set is processed as OUTPUT for a SYSOUT data set or if LABEL=(,,OUT) is specified in the DD statement.
RDBACK	Input data set, positioned to read backward.
UPDAT	Data set to be updated in place or, for BDAM, blocks are to be updated or added.
Option 2	Meaning
LEAVE	Positions the current tape volume to the logical end of the data set when volume switching occurs. If processing was forward, the volume is positioned to the end of the data set; if processing was backwards (RDBACK), the volume is positioned to the beginning of the data set.
REREAD	Positions the current tape volume to reprocess the data set when volume switching occurs. If processing was forward, the volume is positioned to the beginning of the data set; if processing was backwards (RDBACK), the volume is positioned to the end of the data set.
DISP	Specifies that a tape volume is to be disposed of in the manner implied by the DD statement associated with the data set. Direct-access volume positioning and disposition are not affected by this parameter of the OPEN macro instruction. There are several dispositions that can be specified in the DISP parameter of the DD statement; DISP can be PASS, DELETE, KEEP, CATLG, or UNCATLG. This option has significance at the time an end-of-volume condition is encountered only when DISP is PASS. The end-of-volume condition may result from the issuance of an FEOV macro instruction or may be the result of reaching the end of a volume.

If DISP is PASS in the DD statement, the tape will be spaced forward to the end of the data set on the current volume.

VS1 Systems: If any DISP option is coded in the DD statement the current volume will be positioned as follows:

DISP Parameter	Action
PASS	Forward space to the end of the data set on the current volume
DELETE	Rewind the current volume
KEEP, CATLG, or UNCATLG	Rewind and unload the current volume

VS2 Systems: If any DISP option is coded in the DD statement (except when DISP is PASS), the resultant action at the time an end-of-volume condition arises depends on (1) how many tape units are allocated to the data set and (2) how many volumes are specified for the data set in the DD statement. This is determined by the UNIT and VOLUME parameters of the DD statement associated with the data set. If the number of volumes is greater than the number of units allocated, the current volume will be rewound and unloaded. If the number of volumes is less than or equal to the number of units, the current volume is merely rewound.

Note: When the DELETE option is specified, the system waits for the completion of the rewind operation before it continues processing subsequent reels of tape.

The LEAVE and REREAD options are meaningless except for magnetic tape and CLOSE TYPE=T. Any other options specified for CLOSE TYPE=T besides LEAVE and REREAD will be treated as LEAVE during execution.

After the OPEN macro instruction has been executed, bit 3 of the DCBOFLGS field in the data control block is set to 1 if the data control block has been opened successfully, but is set to 0 if the data control block has not been opened successfully.

The following errors cause the results indicated:

Error	Result
Attempting to open a data control block that is already open.	No action.
Attempting to open a data control block when the <i>dcb address</i> operand does not specify the address of a data control block.	Unpredictable.
Attempting to open a DCB for a printer with the UCS feature and an error occurred when attempting to block or unblock data checks (specified by the presence or absence of OPTCD=U in the DCB macro).	Unpredictable (VS1 only). Task abnormally terminated (VS2 only).
Attempting to open a data control block when a corresponding DD statement has not been provided.	A "DD STATEMENT MISSING" message is issued. An attempt to use the data set causes unpredictable results.

The last of these errors can be detected by testing bit 3 of the DCBOFLGS field in the data control block. Bit 3 is set to 0 in the case of an error and can be tested by the sequence:

```
TM DCBOFLGS,X'10'
```

```
BZ ERRORRTN      (Branch to user's error routine)
```

OPEN—List Form

The list form of the OPEN macro instruction is used to construct a data management parameter list. Any number of operands (data control block addresses and associated options) can be specified.

The list consists of a one-word entry for each DCB in the parameter list; the high-order byte is used for the options and the three low-order bytes are used for the DCB address. The end of the list is indicated by a one in the high-order bit of the last entry's option byte. The length of a list generated by a list form instruction must be equal to the maximum length list required by any execute form instruction that refers to the same list. A maximum length list can be constructed by one of two methods:

- Code a list-form instruction with the maximum number of parameters that are required by an execute form instruction that refers to the list.
- Code a maximum length list by using commas in a list-form instruction to acquire a list of the appropriate size. For example, coding OPEN (,,,,,,),MF=L would provide a list of five fullwords (five dcb addresses and five options).

Entries at the end of the list that are not referenced by the execute-form instruction are assumed to have been filled in when the list was constructed or by a previous execute-form instruction. Before using the execute-form instruction, you may shorten the list by placing a one in the high-order bit of the last DCB entry to be processed.

A zeroed work area on a fullword boundary is equivalent to OPEN (,(INPUT,DISP),...),MF=L and can be used in place of a list-form instruction. The high-order bit of the last DCB entry must contain a one before this list can be used with the execute-form instruction.

A parameter list constructed by an OPEN, list form, macro instruction can be referred to by either an OPEN or CLOSE execute form instruction.

The description of the standard form of the OPEN macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates which operands are completely optional and those required in at least one of the pair of list and execute forms. The format description below indicates the optional and required operands in the list form only.

The list form of the OPEN macro instruction is written as follows:

[<i>symbol</i>]	OPEN	([<i>dcb address</i>],[(<i>options</i>)], ...) ,MF=L
-------------------	------	---

dcb address—A-Type Address

MF=L—Coded as shown

The MF=L operand specifies that the OPEN macro instruction is used to create a data management parameter list that is referenced by an execute form instruction.



OPEN—Execute Form

A remote data management parameter list is used in, and can be modified by, the execute form of the OPEN macro instruction. The parameter list can be generated by the list form of either an OPEN or CLOSE macro instruction.

The description of the standard form of the OPEN macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates which operands are totally optional and those required in at least one of the pair of list and execute forms. The format description below indicates the optional and required operands in the execute form only.

The execute form of the OPEN macro instruction is written as follows:

[<i>symbol</i>]	OPEN	[([<i>dcb address</i>],[(<i>options</i>)], ...)] , MF=(E, { <i>data management list address</i> (1)}
-------------------	-------------	--

dcb address—RX-Type Address or (2-12)

MF=(E,{ *data management list address* | (1)}

This operand specifies that the execute form of the OPEN macro instruction is used, and an existing data management parameter list (created by a list-form instruction) is used. The **MF=** operand is coded as follows:

E—Coded as shown

data management list address—RX-Type, (2-12), (1)

PDAB—Construct a Parallel Data Access Block (QSAM)

The PDAB macro instruction is used in conjunction with the GET (**TYPE=P**) macro instruction. It defines an area in the problem program where the Open and Close routines build and maintain a queue of DCB address for use by the Get routine.

The parallel data access block is constructed during the assembly of the problem program. The MAXDCB operand must be coded in the PDAB macro instruction because it cannot be supplied from any other source.

Certain data set characteristics prevent a DCB address from being available on the queue—see the description of QSAM parallel input processing in *OS/VS Data Management Services Guide*.

The PDAB macro instruction is written as follows:

[<i>symbol</i>]	PDAB	MAXDCB= <i>dcb number</i>
-------------------	-------------	----------------------------------

MAXDCB=*absexp* (maximum value is 32,767)

Specifies the maximum number of DCBs that you require in the queue for a GET request.

Note: The number of bytes required for PDAB is equal to $24 + 8n$ where n is the value of the keyword, MAXDCB.

PDABD—Provide Symbolic Reference to a Parallel Data Access Block (QSAM)

The PDABD macro instruction is used to generate a dummy control section that provides symbolic names for the fields in one or more parallel data access blocks. The names, attributes, and descriptions of the fields appear in Appendix H.

The name of the dummy control section generated by a PDABD macro instruction is IHAPDAB. The use of any of the symbolic names provided by the dummy section should be preceded by a USING instruction specifying IHAPDAB and a dummy section base register containing the address of the actual parallel data access block. The PDABD macro instruction should only be used once within any assembled module; however, the resulting symbolic names can be used for any number of parallel data access blocks by changing the address in the dummy section base register. The PDABD macro instruction can be coded at any point in a control section. If coded at any point other than at the end of a control section, the control section must be resumed by coding a CSECT instruction.

The PDABD macro instruction is written as follows:

Ⓟ	PDABD	Ⓟ
---	--------------	---

POINT—Position to a Relative Block (BPAM and BSAM—Tape and Direct Access Only)

The POINT macro instruction causes the system to start processing the next READ or WRITE operation at the specified block in the data set on the current volume. All input and output operations using the same data control block must have been tested for completion before the POINT macro instruction is issued. When processing a data set that has been opened for UPDAT, the POINT macro instruction must be followed by a READ macro instruction. When processing an output data set, the POINT macro instruction must be followed by a WRITE macro instruction prior to closing the data set, unless a CLOSE macro instruction (with TYPE=T specified) was issued prior to the POINT macro instruction. Issuing a POINT macro instruction for a system output data set on magnetic tape results in an effective NOP instruction (VS1 only).

The POINT macro instruction is written as follows:

[symbol]	POINT	dcb address ,block address
----------	-------	-------------------------------

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the opened data set that is to be positioned.

block address—RX-Type Address, (2-12), or (0)

The *block address* operand specifies the address of a fullword on a fullword boundary containing the relative address of the block in the data set that is to be processed next. The relative address is specified as follows:

Magnetic Tape: The block number is in binary and is right-adjusted in the fullword with the high-order bits set to zero; add one if reading tape backward. Do not use the POINT macro instruction for tapes without standard labels when:

- The data set is opened for RDBACK or
- The DD statement for the data set specifies DISP=MOD.

If OPTCD=H is indicated in the data control block, the POINT macro instruction can be used to perform record positioning on DOS tapes that contain embedded checkpoint records. Any embedded checkpoint records that are encountered during the record positioning are bypassed and are not counted as blocks spaced over. OPTCD=H must be specified in a job control language DD statement. Do not use the POINT macro instruction to backspace DOS 7-track tapes that are written in data convert mode and that contain embedded checkpoint records.

Note: When an end-of-data condition is encountered on magnetic tape, you must not issue the POINT macro instruction unless you have first repositioned the tape for processing within your data set; otherwise, the POINT operation will be unsuccessful. (Issuing CLOSE TYPE=T is an easy method to accomplish repositioning in your EODAD routine.)

Direct-Access Device: The fullword specified in the *block address* operand contains the relative track address (in the form TTRz), where:

TT is a 2-byte relative track number.

R is a 1-byte block (record) number on the track indicated by TT.

z is a byte set to zero; it may also be set to 1 to retrieve the block following the TTR block.

Note: The first block of a magnetic tape data set is always specified by the hexadecimal value 00000001. The first block of a direct-access device data set can be specified by either hexadecimal 00000001 or 00000100 (see the previous description of TTRz).

The fullword specified in the *block address* operand contains the relative block address for a VS1 SYSIN data set. The 4-byte relative *block address* must have been returned in register 1 from a previous NOTE macro instruction and it cannot be altered. POINT cannot be used for VS2 SYSIN data sets or for VS1 or VS2 SYSOUT data sets.

If the volume cannot be positioned correctly or if the block identification is not of the correct format, the error analysis (SYNAD) routine is given control when the next CHECK macro instruction is executed.

PRTOV—Test for Printer Carriage Overflow (BSAM and QSAM—Online Printer and 3525 Card Punch, Print Feature)

The PRTOV macro instruction is used to control the page format for an online printer when carriage control characters are not being used or to supplement the carriage control characters that are being used.

The PRTOV macro instruction causes the system to test for an overflow condition on the specified channel (either channel 9 or channel 12) of the printer carriage control, and either skip the printer carriage to the line corresponding to channel 1, or transfer control to the exit address, if one is specified. Overflow is detected after printing the line that follows the line corresponding to channel 9 or channel 12. The PRTOV macro should be issued each time you want the system to test for an overflow condition.

When the PRTOV macro instruction is used with a 3525 card punch, print feature, channel 9 or 12 can be tested. If an overflow condition occurs, control is passed to the overflow exit routine if the overflow exit address is coded, or a skip to channel 1 (first print-line of the next card) occurs.

When requesting overprinting (for example, to underscore a line), the PRTOV macro instruction is issued before the first PUT or WRITE macro instruction only. The PRTOV macro instruction should be issued only when the device type is an online printer. PRTOV cannot be used to request overprinting on the 3525.

The PRTOV macro instruction is written as follows:

[<i>symbol</i>]	PRTOV	<i>dcb address</i> ,{ 9 12 } [, <i>overflow exit address</i>]
-------------------	--------------	--

dcb address—RX-Type Address or (2-12)

The *dcb address* operand specifies the address of the data control block opened for output to an online printer or 3525 card punch with a print feature.

9—Coded as shown

12—Coded as shown

These operands specify which channel is to be tested by the PRTOV macro instruction. For an online printer, 9 and 12 correspond to carriage control channels 9 and 12. For the 3525 card punch, 9 corresponds to print line number 17, and 12 corresponds to print line number 23. More detail about the card print-line format is included in *OS and OS/VS Programming Support for the IBM 3505 Card Reader and IBM 3525 Card Punch*.

overflow exit address—RX-Type Address or (2-12)

The *overflow exit address* operand specifies the address of the user-supplied routine to be given control when an overflow condition is detected on the specified channel. If this operand is omitted, the printer carriage skips to the first line of the next page or the 3525 skips to the first line of the next card before executing the next PUT or WRITE macro instruction.

When the overflow exit routine is given control, the contents of the registers are as follows:

Register	Contents
0 and 1	The contents are destroyed.
2 - 13	The same contents as before the macro instruction was executed.
14	Return address.
15	Overflow exit routine address.

PUT—Write Next Logical Record (QISAM)

The PUT macro instruction causes the system to write a record into an indexed sequential data set. If the move mode is used, the PUT macro instruction moves a logical record into an output buffer from which it is written. If the locate mode is specified, the address of the next available output buffer segment is available in register 1 after the PUT macro instruction is executed. The logical record can then be constructed in the buffer for output as the next record. The records are blocked by the system (if specified in the data control block) before being placed in the data set. The system uses the length specified in the record length (DCBLRECL) field of the data control block as the length of the record currently being written. When constructing blocked variable-length records in the locate mode, the problem program may either specify the maximum record length once in the DCBLRECL field of the data control block or provide the actual record length in the DCBLRECL field before issuing each PUT macro instruction. Use of the maximum record length may result in more but shorter blocks, since the system uses this length when it tests to see if the next record can be contained in the current block.

The PUT macro instruction is used to create or extend an indexed sequential data set. To extend the data set, the key of any added record must be higher than the highest key existing in the data set, and the disposition parameter of the DD card must be specified as DISP=MOD. The new records are placed in the prime data space, starting in the first available space, until the original space allocation is exhausted.

To create a data set using previously allocated space, the disposition parameter of the DD card must specify DISP=OLD.

The PUT macro instruction is written as follows:

[symbol]	PUT	<i>dcb address</i> [, <i>area address</i>]
----------	-----	--

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the opened ISAM data set.

area address—RX-Type Address, (2-12), or (0)

The *area address* operand specifies the address of the area that contains the record to be written (move mode only). Either move or locate mode can be used with QISAM, but they must not be mixed within the specified data control block. The following describes operations for locate and move modes:

Locate Mode: If the locate mode is specified in the data control block, the *area address* operand must be omitted. The system returns the address of the next available buffer in register 1; this is the buffer into which the next record is placed. The record is not written until another PUT macro instruction is issued for the same data control block. The last record is written when a CLOSE macro instruction is issued to close the data set.

Move Mode: If the move mode has been specified in the data control block, the *area address* operand must specify the address in the problem program that contains the record to be written. The system moves the record from the area to an output buffer before control is returned. If the *area address* operand is omitted, the system assumes that register zero contains the area address.

PUT Routine Exit

The error analysis (SYNAD) routine is given control if the output operation could not be completed satisfactorily. The contents of the registers when the error analysis routine is given control are described in Appendix A.

PUT—Write Next Logical Record (QSAM)

The PUT macro instruction causes the system to write a record in a sequential data set. Various modes are available and are specified in the DCB macro instruction. In the locate mode, the address of an area within an output buffer is returned in register 1 after the macro instruction is executed. The user should subsequently construct, at this address, the next sequential record or record segment. The move mode of the PUT macro instruction causes a logical record to be moved into an output buffer. In the data mode, which is available only for variable-length spanned records, the PUT macro instruction moves only the data portion of the record into one or more output buffers. When the substitute mode is specified, the macro transfers ownership of a work area containing a record to the control program. In return, the ownership of a buffer segment is transferred to the user, for use as a work area. There is no movement of data in storage.

The records are blocked by the control program (as specified in the data control block) before being placed in the data set. For undefined-length records, the DCBLRECL field determines the length of the record that is subsequently written. For variable-length records, the DCBLRECL field is used to locate a buffer segment of sufficient size (locate mode), but the length of the record actually constructed is verified before the record is written (the output block can be filled to the maximum if, before issuing the PUT macro, DCBLRECL is set equal to the record length). For variable-length spanned records, the system segments the record according to the record length, buffer length, and amount of unused space remaining in the output buffer. The smallest segment created will be 5 bytes, 4 for the segment descriptor word plus one byte of data.

If the ASCII translation routines are included when the operating system is generated, translation can be requested by coding LABEL=(,AL) or (,AUL) in the DD statement, or it can be requested by coding OPTCD=Q in the DCB macro instruction or DCB subparameter of the DD statement. When translation is requested, all QSAM records whose record format (RECFM operand) is F, FB, D, DB, or U are automatically translated from EBCDIC code to ASCII code. For translation to occur correctly, all output data must be in EBCDIC code; any EBCDIC character that cannot be translated into an ASCII character is replaced by a substitute character.

The PUT macro instruction is written as follows:

[<i>symbol</i>]	PUT	<i>dcb address</i> [, <i>area address</i>]
-------------------	-----	--

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the data set opened for output.

area address—RX-Type Address, (2-12), or (0)

The *area address* operand specifies the address of an area that contains the record to be written (move or data mode), or it specifies the address of an area to be exchanged for a buffer (substitute mode). The move, locate, data, or substitute mode can be used with QSAM, but they must not be mixed within the specified data control block. If the *area address* operand is omitted in the move, data, or substitute mode, the system assumes that register zero contains the area address. The following describes the operation of the four modes:

Locate Mode: If the locate mode is specified, the *area address* operand must be omitted. The system returns the address of the next available buffer in register 1; this is the buffer into which the next record is placed.

When variable-length spanned records are used and a record area has been provided for a logical record interface (BFTEK=A has been specified in the data control block or a BUILDRCDD macro instruction has been issued), the address returned in register 1 points to an area large enough to contain the maximum record size (up to 32,756 bytes). The system segments the record and writes all segments, providing proper control codes for each segment. If, for variable-length spanned records, an area has not been provided, the actual length remaining in the buffer will be returned in register 0. In this case, it is the user's responsibility to segment the records and process them in terms of record segments. The record or segment is not written until another PUT macro instruction is issued for the same data control block. The last record is written when the CLOSE macro instruction is issued.

When a PUT macro instruction is used in the locate mode, the address of the buffer for the first record or segment is obtained by issuing a PUT macro instruction; QSAM returns the address of the buffer, but the record is not written until the next PUT macro instruction is issued.

Move Mode: If the move mode has been specified in the data control block, the *area address* operand specifies the address of the area that contains the record to be written. The system moves the record to an output buffer before control is returned. The address of the output buffer is returned in register 1 (this action provides compatibility with substitute mode operations, and makes it possible for the problem program to be used in instances where substitute mode is requested but cannot be supported by the system).

Data Mode: If the data mode is specified in the data control block (data mode can be specified for variable-length spanned records only), the *area address* operand specifies the address of an area in the problem program that contains the data portion of the record to be written. The system moves the data portion of the record to an output buffer before control is returned. The user must place the total data length in the DCBPREDL (not DCBLRECL) field of the data control block before the PUT macro instruction is issued.

Substitute Mode: If the substitute mode is specified in the data control block, the *area address* operand specifies the address of an area in the problem program that contains the next record to be written. The area is exchanged for an empty buffer. The address of the empty buffer is returned in register 1.

PUT Routine Exit

The error analysis (SYNAD) routine is given control if an output operation could not be completed satisfactorily. If the output operation could not be completed satisfactorily, the error analysis (SYNAD) routine is given control after the next PUT instruction is issued. The contents of the registers when the error analysis routine is given control are described in Appendix A.

PUTX—Write a Record from an Existing Data Set (QISAM and QSAM)

The PUTX macro instruction causes the control program to return an updated record to a data set (QISAM and QSAM) or to write a record from an input data set into an output data set (QSAM only). There are two modes of the PUTX macro instruction. The output mode (QSAM only) allows writing a record from an input data set on a different output data set. The output data set may specify the spanning of variable-length records, but the input data set must not contain spanned records.

The update mode returns an updated record to the data set from which it was read. The logical records are blocked by the control program, as specified in the data control block, before they are placed in the output data set. The control program uses the length specified in the DCBLRECL field as the length of the record currently being stored. Control is not returned to the user's program until the control program has processed the record.

The PUTX macro instruction can be used only in the output mode for SYSIN or SYSOUT data sets.

The PUTX macro instruction is written as follows:

[<i>symbol</i>]	PUTX	<i>dcb address</i> [, <i>input dcb address</i>]
-------------------	-------------	---

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for a data set opened for output.

input dcb address—RX-Type Address, (2-12), or (0)

The *input dcb address* operand specifies the address of a data control block opened for input. The PUTX macro instruction can be used for the following modes:

Output Mode: This mode is used with QSAM only. The *input dcb address* operand specifies the address of the data control block opened for input. If this operand is omitted, the system assumes that register 0 contains the *input dcb address*.

Update Mode: The *input dcb address* operand is omitted for update mode.

PUTX Routine Exit

The error analysis (SYNAD) routine is given control if the operation is not completed satisfactorily. The contents of the registers when the error analysis routine is given control are described in Appendix A.

READ—Read a Block (BDAM)

The READ macro instruction causes a block to be retrieved from a data set and placed in a designated area of storage. Control may be returned to the problem program before the block is retrieved. The input operation must be tested for completion using a CHECK or WAIT macro instruction. A data event control block, shown in Appendix A, is constructed as part of the macro expansion.

The standard form of the READ macro instruction is written as follows (the list and execute forms are shown following the descriptions of the standard form):

[<i>symbol</i>]	READ	<i>decb name</i> , <i>type</i> , <i>dcb address</i> , { <i>area address</i> 'S' } , { <i>length</i> 'S' } , { <i>key address</i> 'S' 0 } , <i>block address</i> [, <i>next address</i>]
-------------------	-------------	--

decb name—symbol

The *decb name* operand specifies the name assigned to the data event control block created as part of the macro expansion.

type—{DI[F | X][R | RU]}

{DK[F | X][R | RU]}

The *type* operand is coded in one of the combinations shown above to specify the type of read operation and the optional services performed by the system:

DI

Specifies that the data and key, if any, are to be read from a specific device address. The device address, which can be designated by any of the three addressing methods, is supplied by the *block address* operand.

DK

Specifies that the data (only) is to be read from a device address identified by a specific key. The key to be used as a search argument must be supplied in the area specified by the *key address* operand; the search for the key starts at the device address supplied in the area specified by the *block address* operand. The description of the DCB macro instruction, LIMCT operand, contains a description of the search.

F

Requests that the system provide block position feedback into the area specified by the *block address* operand. This character can be coded as a suffix to DI or DK as shown above.

X

Requests exclusive control of the data block being read, and it requests that the system provide block position feedback into the area specified by the *block address* operand. The descriptions of the WRITE and RELEX macro instructions contain a description of releasing a data block that is under exclusive control. This character can be coded as a suffix to DI or DK as shown above.

R

Requests that the system provide next address feedback into the area specified by the *next address* operand. When **R** is coded, the feedback is the relative track address of the next data record. This character can be coded as a suffix to **DI** or **DK, DIF, DIX, DKF, or DKX** as shown above, but it can be coded only for use with variable-length spanned records.

RU

Requests that the system provide next address feedback into the area specified by the *next address* operand. When **RU** is coded, the feedback is the relative track address of the next capacity record (**R0**) or data record whichever occurs first. These characters can be coded as a suffix to **DI, DK, DIF, DIX, DKF, or DKX**, but it can be coded only for use with variable-length spanned records.

dcB address—A-Type Address or (2-12)

The *dcB address* operand specifies the address of the data control block opened for the data set to be read.

area address—A-Type Address, (2-12), or 'S'

The *area address* operand specifies the address of the area into which the data block is to be placed. If 'S' is coded instead of an address, dynamic buffering is requested (dynamic buffering must also be specified in the MACRF operand of the DCB macro instruction). When dynamic buffering is used, the system acquires a buffer and places its address in the data event control block.

length—symbol, decimal digit, absexp, (2-12), or 'S'

The *length* operand specifies the number of data bytes to be read up to a maximum of 32,760. If 'S' is coded instead of a length, the number of bytes to be read is taken from the data control block.

key address—A-Type Address, (2-12), 'S', or 0

The *key address* operand specifies the address of the area for the key of the desired data block. If the search operation is made using a key, the area must contain the key. Otherwise, the key is read into the designated area. If the key is read and 'S' was coded for the area address, 'S' can also be coded for the key address; the key and data are read sequentially into the buffer acquired by the system. If the key is not to be read, specify 0 instead of an address or 'S'.

block address—A-Type Address or (2-12)

The *block address* operand specifies the address of the area containing the relative block address, relative track address, or actual device address of the data block to be retrieved. The device address of the data block retrieved is placed in this area if block position feedback is requested. The length of the area that contains the address depends on whether the feedback option (OPTCD=F) has been specified in the data control block and if the READ macro instruction requested feedback.

If OPTCD=F has been specified, feedback (if requested) is in the same form as was originally presented by the READ macro instruction, and the field can be either three or eight bytes long depending on the type of addressing.

If OPTCD=F has not been specified, feedback (if requested) is in the form of an actual device address, and the field must be eight bytes long.

next address—A-Type Address or (2-12)

The *next address* operand specifies the address of the storage area where the system places the relative address of the next record. The length operand must be specified as 'S'. When the *next address* operand is specified, an **R** or **RU** must be added to the *type* operand (for example, **DIR** or **DIRU**). The **R** indicates that the next address returned is the next data record. **RU** indicates that the next address returned is for the next data or capacity record, whichever occurs first. The *next address* operand can be coded only for use with variable-length spanned records.

READ—Read a Block of Records (BISAM)

The READ macro instruction causes an unblocked record, or a block containing a specified logical record, to be retrieved from a data set. The block is placed in a designated area of storage, and the address of the logical record is placed in the data event control block. The data event control block is constructed as part of the macro expansion and is described in Appendix A.

Control may be returned to the problem program before the block is retrieved. The input operation must be tested for completion using a WAIT or CHECK macro instruction.

The standard form of the READ macro instruction is written as follows for BISAM (the list and execute forms are shown following the descriptions of the standard form):

[symbol]	READ	<i>decb name</i> , <i>type</i> , <i>dcb address</i> ,{ <i>area address</i> 'S'} ,{ <i>length</i> 'S'} , <i>key address</i>
----------	------	---

decb name—symbol

The *decb name* operand specifies the name assigned to the data event control block (DECBC) created as part of the macro expansion.

type—{K | KU}

The *type* operand is coded as shown to specify the type of read operation:

K

Specifies normal retrieval.

KU

Specifies that the record retrieved is to be updated and returned to the data set; the system saves the device address to be returned.

When an ISAM data set is being updated with a READ KU macro instruction and a WRITE K macro instruction, both the READ and WRITE macro instructions must refer to the same data event control block. This update operation can be performed by using a list-form instruction to create the list (data event control block) and by using the execute form of the READ and WRITE macro instructions to refer to the same list.

dcb address—A-Type Address or (2-12)

The *dcb address* operand specifies the address of the data control block for the opened data set to be read.

area address—A-Type Address, (2-12), or 'S'

The *area address* operand specifies the address of the area into which the data block is placed. The first sixteen bytes of this area are used by the system and do not contain information from the data block. The *area address* must specify a different area than the *key address*. Dynamic buffering is specified by coding 'S' instead of an address; the address of the acquired storage area is returned in the data event control block. Indexed sequential buffer and work area requirements are described in *OS/VS Data Management Services Guide*.

length—symbol, decimal digit, absexp, (2-12), or 'S'

The *length* operand specifies the number of bytes to be read up to a maximum of 32,760. If 'S' is coded instead of a length, the number of bytes to be read is taken from the count field of the record; for blocked records, 'S' must be coded.

key address—A-Type Address or (2-12)

The *key address* operand specifies the address of the area in the problem program containing the key of a logical record in the block that is to be retrieved. When the input operation is completed, the storage address of the logical record is placed in the data event control block. The *key address* must specify a different area than the *area address*.

READ—Read a Block (BPAM and BSAM)

The READ macro instruction causes a block to be retrieved from a data set and placed in a designated area of storage. Control may be returned to the problem program before the block is retrieved. The input operation must be tested for completion using a CHECK macro instruction. A data event control block, shown in Appendix A, is constructed as part of the macro expansion.

If the OPEN macro instruction specifies UPDAT, both the READ and WRITE macro instruction must refer to the same data event control block. Refer to the list form of the READ or WRITE macro instruction for a description of how to construct a data event control block; refer to the execute form of the READ or WRITE macro instruction for a description of how to modify an existing data event control block.

For information on additional operands for the READ macro for the 1275 or 1419, see *OS Data Management Services and Macro Instructions for IBM 1419/1275*.

For information on additional operands for the READ macro instruction for the 3886, see *OS/VS IBM 3886 Optical Character Reader Model 1 Reference*.

The standard form of the READ macro instruction is written as follows (the list and execute forms are shown following the descriptions of the standard form instructions):

[<i>symbol</i>]	READ	<i>decb name</i> , <i>type</i> , <i>dcb address</i> , <i>area address</i> ,[<i>{ length 'S' }</i>]
-------------------	-------------	--

decb name—symbol

The *decb name* operand specifies the name assigned to the data event control block (DECB) created as part of the macro expansion.

type—{SF | SB}

The *type* operand is coded as shown to specify the type of read operation:

SF

Specifies normal, sequential, forward retrieval.

SB

Specifies a read backward operation; this operand can be specified only for magnetic tape with format-F or format-U records.

dcb address—A-Type Address or (2-12)

The *dcb address* operand specifies the address of the data control block for the opened data set to be read.

area address—A-Type Address or (2-12)

The *area address* operand specifies the address of the problem program area into which the record is placed. When a READ SB macro instruction is issued, the area address must be the address of the last byte of the area into which the record is read. If the data set contains keys, the key is read into the buffer followed by the data.

length—symbol, decimal digit, absexp, (2-12), or 'S'

The *length* operand specifies the number of data bytes to be read, to a maximum of 32,760. (If the data is translated from ASCII code to EBCDIC code, the maximum number of bytes that can be read is 2048. A number can be coded only for format-U records. The number of bytes to be read is taken from the data control block if 'S' is coded instead of a number. (This operand is ignored for format-F or format-V

records.) For format-D records only, the length of the record just read is automatically inserted into the DCBLRECL field if BUFOFF=(L) is not specified in the data control block.

READ—Read a Block (Offset Read of Keyed BDAM Data Set Using BSAM)

The READ macro instruction causes a block to be retrieved from a data set and placed in a designated area of storage. The data set is a BDAM data set and its record format is unblocked variable-length spanned records. BFTEK=R must be specified in the data control block. Control may be returned to the problem program before the block is retrieved. The input operation must be tested for completion using a CHECK macro instruction. A data event control block, shown in Appendix A, is constructed as part of the macro expansion.

The standard form of the READ macro instruction is written as follows (the list and execute forms are shown following the descriptions of the standard form):

[symbol]	READ	<i>decb name</i> ,SF , <i>dcb address</i> , <i>area address</i>
----------	-------------	--

decb name—symbol

The *decb name* operand specifies the name assigned to the data event control block (DECB) created as part of the macro expansion.

SF

Specifies normal, sequential, forward retrieval.

dcb address—A-Type Address or (2-12)

The *dcb address* operand specifies the address of the data control block for the opened BDAM data set to be read.

area address—A-Type Address or (2-12)

The *area address* operand specifies the address of the area into which the record is placed.

When a spanned BDAM data set is created with keys, only the first segment of a record has a key; successive segments do not. When a spanned record is retrieved by the READ macro instruction, the system places a segment in a designated area addressed by the *area address* operand. The problem program must assemble all the segments into a logical record. Since only the first segment has a key, the successive segments are read into the designated area offset by key length to ensure that the block-descriptor word and the segment-descriptor word are always in the same relative position.

READ—List Form

The list form of the READ macro instruction is used to construct a data management parameter list in the form of a data event control block (DECB). Refer to Appendix A for a description of the various fields of the DECB for each access method.

The description of the standard form of the READ macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates the operands used for each access method, as well as the meaning of 'S' when coded for the area address, length, and key address operands. For each access method, 'S' can be coded only for those operands for which it can be coded in the standard form of the macro instruction. The format description below indicates the optional and required operands in the list form only.

The list form of the READ macro instruction is written as follows:

[<i>symbol</i>]	READ	<i>decb name</i> , <i>type</i> , [<i>dcb address</i>] , [<i>area address</i> 'S'] , [<i>length</i> 'S'] , [<i>key address</i> 'S'] , [<i>block address</i>] , [<i>next address</i>] , MF=L
-------------------	-------------	---

decb name—symbol

type—Code one of the types shown in the standard form

dcb address—A-Type Address or 'S'

area address—A-Type Address or 'S'

length—symbol, decimal digit, absexp, or 'S'

key address—A-Type Address or 'S'

block address—A-Type Address

next address—A-Type Address

MF=L—Coded as shown

The **MF=L** operand specifies that the READ macro instruction is used to create a data event control block that can be referenced by an execute-form instruction.



READ—Execute Form

A remote data management parameter list (data event control block) is used in, and can be modified by, the execute form of the READ macro instruction. The data event control block can be generated by the list form of either a READ or WRITE macro instruction.

The description of the standard form of the READ macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates the operands used for each access method, as well as the meaning of 'S' when coded for the area address, length, and key address operands. For each access method, 'S' can be coded only for those operands for which it can be coded in the standard form of the macro instruction. The format description below indicates the optional and required operands in the execute form only.

The execute form of the READ macro instruction is written as follows:

<i>[symbol]</i>	READ	<i>decb address</i> , <i>type</i> , [<i>dcb address</i>] , [<i>area address</i> 'S'] , [<i>length</i> 'S'] , [<i>key address</i> 'S'] , [<i>block address</i>] , [<i>next address</i>] , MF=E
-----------------	-------------	---

decb address—RX-Type Address or (2-12)

type—Code one of the types shown in the standard form

dcb address—RX-Type Address or (2-12)

area address—RX-Type Address, (2-12), or 'S'

length—symbol, decimal digit, absexp, (2-12), or 'S'

key address—RX-Type Address, (2-12), or 'S'

block address—RX-Type Address, or (2-12)

next address—RX-Type Address or (2-12)

MF=E—Coded as shown

The **MF=E** operand specifies that the execute form of the READ macro instruction is used, and that an existing data event control block (specified in the *decb address* operand) is used by the access method.

RELEX—Release Exclusive Control (BDAM)

The RELEX macro instruction causes release of a data block from exclusive control. The block must have been requested in an earlier READ macro instruction which specified either **DIX** and **DKX**.

Note: A WRITE macro instruction that specifies either **DIX** or **DKX** can also be used to release exclusive control.

The RELEX macro instruction is written as follows:

[<i>symbol</i>]	RELEX	D , <i>dcb address</i> , <i>block address</i>
-------------------	--------------	--

D

Specifies direct access.

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for a BDAM data set opened for processing. The *dcb address* operand must specify the same data control block as designated in the associated READ macro instruction.

block address—RX-Type Address, (2-12), or (0)

The *block address* operand specifies the address of the area containing the relative block address, relative track address, or actual device address of the data block being released. The *block address* operand must specify the same area as designated in the *block address* operand of the associated READ macro instruction.

Completion Codes

When the system returns control to the problem program, the low-order byte of register 15 contains one of the following return codes; the three high-order bytes of register 15 are set to zero.

Hexadecimal

Code	Meaning
00	Operation completed successfully.
04	The specified data block was not in the exclusive control list.
08	The relative track address, relative block address, or actual device address was not within the data set.

RELSE—Release an Input Buffer (QISAM and QSAM Input)

The RELSE macro instruction causes immediate release of the current input buffer. The next GET macro instruction retrieves the first record from the next input buffer. For variable-length spanned records (QSAM), the input data set is spaced to the next segment which starts a logical record in a subsequent block. Thus, one or more blocks of data or records may be skipped. The RELSE macro instruction is ignored if a buffer has just been completed or released, if the records are unblocked, or if issued for a SYSIN data set.

The RELSE macro instruction is written as follows:

[<i>symbol</i>]	RELSE	<i>dcb address</i>
-------------------	--------------	--------------------

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the opened input data set.

SETL—Set Lower Limit of Sequential Retrieval (QISAM Input)

The SETL macro instruction causes the control program to start processing the next input request at the specified record or device address. Sequential retrieval of records using the GET macro instruction continues from that point until the end of the data set is encountered or a CLOSE or ESETL macro instruction is issued. An ESETL macro instruction must be issued between SETL macro instructions that specify the same data set.

The SETL macro instruction can specify that retrieval is to start at the beginning of the data set, at a specific address on the device, at a specific record, or at the first record of a specific class of records. For additional information on SETL functions, see *OS/VS Data Management Services Guide*.

The SETL macro instruction is written as follows:

[symbol]	SETL	<i>dcb address</i> { ,K[H], <i>lower limit address</i> ,KC, <i>lower limit address</i> ,KD[H], <i>lower limit address</i> ,KCD, <i>lower limit address</i> ,I, <i>lower limit address</i> ,ID, <i>lower limit address</i> ,B ,BD }
----------	------	--

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block opened for the indexed sequential data set being processed.

The following operands are coded as shown, and they specify the starting point and type of retrieval:

K

Specifies that the next input operation begins at the record containing the key specified in the *lower-limit address* operand.

KC

Specifies that the next input operation begins at the first record of the key class specified in the *lower-limit address* operand. If the first record of the specified key class has been deleted, retrieval begins at the next nondeleted record regardless of key class.

H

This option, used with either **K** or **KD**, specifies that, if the key in the *lower-limit address* operand is not in the data set, retrieval begins at the next higher key. The character **H** cannot be coded with the key class operands (**KC** and **KCD**).

KD

Specifies that the next input operation begins at the record containing the key specified in the *lower-limit address* operand, but only the data portion of the record is retrieved. This operand is valid only for unblocked records.

KCD

Specifies that the next input operation begins at the first record of the key class specified in the *lower-limit address* operand, but only the data portion of the record is retrieved. This operand is valid only for unblocked records.

I

Specifies that the next input operation begins with the record at the actual device address specified in the *lower-limit address* operand.

ID

Specifies that the next input operation begins with the record at the actual device address specified in the *lower-limit address* operand, but only the data portion of the record is retrieved. This operand is valid only for unblocked records.

B

Specifies that the next input operation begins with the first record in the data set.

BD

Specifies that the next input operation begins with the first record in the data set, but only the data portion is retrieved. This operand is valid only for unblocked records.

lower limit address—RX-Type Address, (2-12), or (0)

The *lower-limit address* operand specifies the address of the area containing the key, key class, or actual device address that designates the starting point for the next input operation. If I or ID has been specified, this area must contain the actual device address (in the form MBBCCHHR) of a prime data record; the other types require that the key or key class be contained in this area.

SETL Exit

The error analysis (SYNAD) routine is given control if the operation could not be completed successfully. The exceptional condition code and general registers are set as shown in Appendix A. If the SETL macro instruction is not reissued, retrieval starts at the beginning of the data set.

SETPRT—Load UCS and FCB Images (BSAM, QSAM, and EXCP)

The SETPRT macro instruction is used with printers that have a universal character set (UCS) buffer or a forms control buffer (FCB). When a SETPRT macro instruction is issued, UCS and FCB images are fetched from the image library and loaded from storage into their respective buffers. The SETPRT macro instruction is also used to block or unblock printer data checks.

IBM character sets and forms control images are included in the image library at system generation; user-defined character sets and forms control images can be added to the image library as described in *OS/VS1 Data Management for System Programmers* and *OS/VS2 System Programming Library: Data Management*. The FCB (EXLST) parameter of the DCB macro instruction can be used to specify the address of an FCB image.

When BSAM is being used, all write operations must be checked for completion before the SETPRT macro instruction is issued; any incomplete write operations are purged. Issuing the SETPRT macro instruction for a device other than an on-line UCS printer results in a NOP instruction.

Note: SETPRT with EXCP programming is valid only for VS2 systems.

The standard form of the SETPRT macro instruction is written as follows (the list and execute forms are shown following the standard form):

<i>[symbol]</i>	SETPRT	<p style="text-align: center;"><i>dcbaddr</i></p> <p style="text-align: center;"> $\left(\begin{array}{l} ,\text{UCS}=(\text{csc } [,\text{F} ,\text{F},\text{V} ,,\text{V}]) \\ [,\text{FCB}=(\text{imageid } [,\text{V} ,\text{A}])] \\ [,\text{OPTCD}=\{\text{B} \text{U}\}] \end{array} \right)$ $\left(\begin{array}{l} ,\text{FCB}=(\text{imageid } [,\text{V} ,\text{A}]) \\ [,\text{OPTCD}=\{\{\text{B} \text{U}\},\text{F} ,\text{U}\}] \end{array} \right)$ $\left(\begin{array}{l} ,\text{OPTCD}=\{\{\text{B} \text{U}\},\text{F} ,\text{U}\} \end{array} \right)$ </p>
-----------------	---------------	--

dcbaddr—A-Type Address or (2-12)

The *dcbaddr* operand specifies the address of the data control block for the data set to be printed; the data set must be opened for output before the SETPRT macro instruction is issued.

UCS= A character code with options

The UCS operand specifies that the UCS buffer is to be loaded from the image library. When the UCS operand is specified, the FCB and OPTCD operands can also be specified. The possible specifications are:

csc (character set code)

The *csc* operand specifies the character set to be loaded. A character set is identified by a 1-4 character code. Codes for standard IBM character sets are as follows:

1403 Printer: AN, HN, PCAN, PCHN, PN, QN, QNC, RN, SN, TN, XN, and YN

3211 Printer: A11, H11, G11,P11, and T11

For descriptions of the standard IBM character sets, refer to *OS/VS1 System Generation Reference* or *OS/VS2 System Programming Library: System Generation Reference*; codes for user-designed character sets are defined by the installation.

F or FOLD

Specifies that the character set image is to be loaded in the fold mode. The fold mode is most often used when the EBCDIC code for lowercase alphabetic characters is printed as uppercase characters by a print train with lowercase type.

V or VERIFY

Requests that the character set image be displayed on the printer for visual verification.

FCB= A character code with options

The **FCB** operand specifies that the forms control buffer (FCB) is to be loaded from the image library. When the **FCB** operand is specified, the **OPTCD** operand can also be specified. The possible specifications are:

imageid

The *imageid* operand specifies the forms control image to be loaded. A forms control image is identified by a 1-4 character code. IBM-supplied images are identified by *imageid* value of STD1 and STD2; user-designed forms control images are defined by the installation. For descriptions of the standard forms control images, refer to *OS/VS1 Data Management for System Programmers* or *OS/VS2 System Programming Library: Data Management*.

V or VERIFY

Requests that the forms control image be displayed on the printer for visual verification. This operand allows forms alignment using the WTOR macro instruction.

A or ALIGN

Allows forms alignment using the WTOR macro instruction.

OPTCD= A printer option code

The **OPTCD** operand specifies whether UCS printer data checks are blocked or unblocked and if the printer is to operate in fold or normal mode. The possible specifications are:

B

Specifies that UCS printer data checks are blocked; this option updates the DCBOPTCD field of the data control block.

U

Specifies that UCS printer data checks are unblocked; this option updates the DCBOPTCD field of the data control block.

F or FOLD

Specifies that printing is in fold mode.

U or UNFOLD

Specifies that printing is in normal mode; this operand causes fold mode to revert to normal mode.

Completion Codes

After the SETPRT macro instruction is executed, a return code is placed in register 15, and control is returned to the instruction following the SETPRT macro instruction. Bits 16-23 indicate the result of the attempt to load the forms control buffer (FCB). Bits 24-31 indicate the result of the attempt to load a universal-character-set (UCS) buffer. For completion codes 18, 1C, 20, and 24, bits 24-31 apply to both FCB and UCS loading. The codes in the following table are in hexadecimal.

Bits 16-23 FCB Code	Bits 24-31 UCS Code	Meaning
00	00	Successful completion.
04	04	The operator canceled the load for one of the following reasons: <ul style="list-style-type: none"> • The image could not be found in the image library. • For a UCS image, the requested chain or train was not available. • For FCB, forms could not be aligned to match the buffer.
08	08	A permanent I/O error was detected when the BLDL macro instruction was issued to locate the image in the image library.
0C	0C	A permanent I/O error was detected while loading the FCB/UCS buffer.
10	10	A permanent I/O error was detected when an attempt was made to display the character set image or forms control image on the printer for visual verification.
14	14	The operator canceled the load because the wrong image was displayed for visual verification.
	Bits 24-31 FCB and UCS Code	
	18	No operation was performed for one of the following reasons: <ul style="list-style-type: none"> • The data control block was not open. • The data control block was not valid for a sequential data set. • The SETPRT parameter list was not valid. • The output device was not a UCS printer. • SETPRT was used with EXCP programming (VS1 only).
	1C	No operation was performed because an uncorrectable error occurred in a previously initiated output operation. The error analysis (SYNAD) routine is entered when the next PUT or CHECK macro instruction is issued. No operation was performed because an uncorrectable error occurred when the Block Data Check or Reset Block Data Check command was issued by SETPRT.
	20	Not enough space has been provided for the IMAGELIB control blocks. Increase the amount of space allocated for the job step.
	24	SYS1.IMAGELIB cannot be opened to load the specified UCS/FCB image.

SETPRT—List Form

The list form of the SETPRT macro instruction is used to construct a data management parameter list.

The description of the standard form of the SETPRT macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates which operands are totally optional and those required in at least one of the pair of list and execute forms. The format description below indicates the optional and required operands for the list form only.

The list form of the SETPRT macro instruction is written as follows:

[<i>symbol</i>]	SETPRT	<div style="display: flex; align-items: center;"> <div style="margin-right: 10px;">[<i>dcbaddr</i>]</div> <div style="font-size: 2em; vertical-align: middle;">{</div> <div style="margin-right: 10px;">(</div> <div style="margin-right: 10px;">,</div> <div style="margin-right: 10px;">UCS=(<i>csc</i> [,<i>F</i> ,<i>F</i>,<i>V</i> ,,<i>V</i>])</div> <div style="margin-right: 10px;">,</div> <div style="margin-right: 10px;">FCB=(<i>imageid</i> [<i>V</i> ,<i>A</i>])]</div> <div style="margin-right: 10px;">,</div> <div style="margin-right: 10px;">OPTCD={<i>B</i> <i>U</i>}</div> <div style="margin-right: 10px;">)</div> <div style="margin-right: 10px;">,</div> <div style="margin-right: 10px;">FCB=(<i>imageid</i> [<i>V</i> ,<i>A</i>])</div> <div style="margin-right: 10px;">,</div> <div style="margin-right: 10px;">OPTCD={({<i>B</i> <i>U</i>}[<i>F</i> ,<i>U</i>])]</div> <div style="margin-right: 10px;">,</div> <div style="margin-right: 10px;">OPTCD={({<i>B</i> <i>U</i>}[<i>F</i> ,<i>U</i>])</div> <div style="margin-right: 10px;">)</div> <div style="margin-right: 10px;">)</div> <div style="margin-right: 10px;">,</div> <div style="margin-right: 10px;">MF=L</div> </div>
-------------------	---------------	---

dcbaddr—A-Type Address

UCS= A character code with options

It is coded as described in the standard form of the macro instruction.

FCB= A character code with options

It is coded as described in the standard form of the macro instruction.

OPTCD= A printer option code

It is coded as described in the standard form of the macro instruction.

MF=L

The **MF=L** operand specifies that the list form of the macro instruction is used to create a parameter list that can be referenced by an execute form of the SETPRT macro instruction.

SETPRT—Execute Form

A remote data management parameter list is referred to, and can be modified by, the execute form of the SETPRT macro instruction.

The description of the standard form of the SETPRT macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates which operands are totally optional and those required in at least one of the pair of list and execute forms. The format description below indicates the optional and required operands for the execute form only.

The execute form of the SETPRT macro instruction is written as follows:

[<i>symbol</i>]	SETPRT	<p data-bbox="803 552 922 583">[<i>dcbaddr</i>]</p> <div style="display: flex; align-items: center; justify-content: center;"> <div style="font-size: 3em; margin-right: 10px;">{</div> <div style="text-align: center;"> <p data-bbox="857 600 1170 632">,UCS=(<i>csc</i> [,F ,F,V ,,V])</p> <p data-bbox="857 632 1170 663">[,FCB=(<i>imageid</i> [,V ,A])]</p> <p data-bbox="857 663 1089 695">[,OPTCD={B U}]</p> <p data-bbox="857 726 1154 758">,FCB=(<i>imageid</i> [,V ,A])</p> <p data-bbox="857 758 1198 789">[,OPTCD={({B U}[,F ,U])]</p> <p data-bbox="857 821 1182 852">,OPTCD={({B U}[,F ,U])</p> </div> <div style="font-size: 3em; margin-left: 10px;">}</div> </div> <p data-bbox="803 873 1349 905">,MF=(E,{<i>data management list address</i> (1)})</p>
-------------------	--------	---

dcbaddr—RX-Type Address or (2-12)

UCS= A character code with options

It is coded as shown in the standard form of the macro instruction.

FCB= A character code with options

It is coded as shown in the standard form of the macro instruction.

OPTCD= A printer option code

It is coded as shown in the standard form of the macro instruction.

MF=(E,{*data management list address* |(1)})

This operand specifies that the execute form of the SETPRT macro instruction is used, and an existing data management parameter list is used.

E—Coded as shown

data management list address—RX-Type Address, (2-12), or (1)

STOW—Update Partitioned Data Set Directory (BPAM)

The STOW macro instruction causes the system to update a partitioned data set directory by adding, changing, replacing, or deleting an entry in the directory. Only one entry can be updated at a time using the STOW macro instruction. If the entry to be added or replaced is a member name, the system writes an end-of-data indication following the member. All input/output operations using the same data control block must have previously been tested for completion.

The STOW macro instruction is written as follows:

[<i>symbol</i>]	STOW	<i>dcb address</i> <i>,list address</i> [, <i>directory action</i>]
-------------------	-------------	--


dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the opened partitioned data set. The STOW macro instruction can be used only when the data set is opened for OUTPUT, UPDAT or OUTIN (BSAM).

list address—RX-Type Address, (2-12), or (0)

The *list address* operand specifies the address of the area containing the information required by the system to maintain the partitioned data set directory. The size and format of the area depend on the directory action requested as follows:

Adding or Replacing a Directory Entry: The *list address* operand must specify an area at least 12 bytes long and beginning on a halfword boundary. The following illustration shows the format of the area:

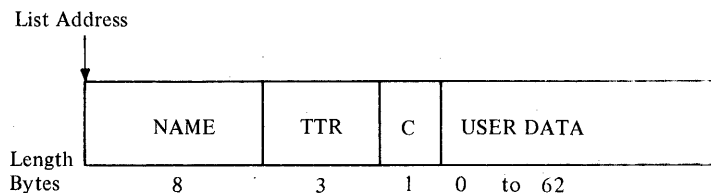

NAME: Specifies the member name or alias being added or replaced. The name must begin in the first byte of the field and be padded on the right with blanks, if necessary, to complete the 8-byte field.

TT: Specifies the relative track number on which the beginning of the data set is located.

R: Specifies the relative block (record) number on the track identified by TT.

Note: The TTR field shown above must be supplied by the problem program if an alias (alias bit is 1) is being added or replaced. The system supplies the TTR field when a member name is being added or replaced.

C: Specifies the type of entry (member or alias) for the name, the number of note list fields (TTRNs), and the length in halfwords, of the user data field. The following describes the meaning of the eight bits:

Bit	Meaning
0=0	Indicates a member name.
0=1	Indicates an alias.
1 and 2	Indicate the number of TTRN fields (maximum of three) in the user data field.
3-7	Indicate the total number of halfwords in the user data field.

Deleting a Directory Entry: The *list address* operand must specify an 8-byte area that contains the member name or alias to be deleted. The name must begin in the first byte of the area and be padded on the right with blanks, if necessary, to complete the eight bytes.

Changing the Name of a Member: The *list address* operand must specify the address of a 16-byte area; the first 8 bytes contain the old member name or alias, and the second 8 bytes contain the new member name or alias. Both names must begin in the first byte of their 8-byte area and be padded on the right with blanks, if necessary, to complete the 8-byte field.

directory action—[**A** | **C** | **D** | **R**]

If the *directory action* operand is not coded, **A** (add an entry) is assumed. The operand is coded as shown to specify the type of directory action:

A

Specifies that an entry is to be added to the directory.

C

Specifies that the name of an existing member or alias is to be changed.

D

Specifies that an existing directory entry is to be deleted.

R

Specifies that an existing directory entry is to be replaced by a new directory entry. If **R** is coded but the old entry is not found, the new entry is added to the directory and a completion code of X'08' is returned in register 15.

Completion Codes

When the system returns control to the problem program, registers 15 and 0 contain one of the following return codes in the low-order byte; the three high-order bytes of both registers are set to zero.

Hexadecimal Return Code	Directory Action			
	A	R	D	C
(Reg. 15) 00	The update of the directory was completed successfully.	The update of the directory was completed successfully.	The update of the directory was completed successfully.	The update of the directory was completed successfully.
04	The directory already contains the specified name.	—	—	The directory already contains the specified new name.
08	—	The specified name could not be found.	The specified name could not be found.	The specified old name could not be found.
0C	No space left in the directory. The entry could not be added, replaced, or changed.	No space left in the directory. The entry could not be added, replaced, or changed.	—	No space left in the directory. The entry could not be added, replaced, or changed.
10	A permanent input or output error was detected. Control is not given to the error analysis (SYNAD) routine.	A permanent input or output error was detected. Control is not given to the error analysis (SYNAD) routine.	A permanent input or output error was detected. Control is not given to the error analysis (SYNAD) routine.	A permanent input or output error was detected. Control is not given to the error analysis (SYNAD) routine.
14	The specified data control block is not open or is opened for input.	The specified data control block is not open or is opened for input.	The specified data control block is not open or is opened for input.	The specified data control block is not open or is opened for input.
18	Insufficient virtual storage was available to perform the STOW function.	Insufficient virtual storage was available to perform the STOW function.	Insufficient virtual storage was available to perform the STOW function.	Insufficient virtual storage was available to perform the STOW function.

Hexadecimal Reason Code

(Reg. 0)	Meaning
00	Reason code is not applicable. (Returned with all return codes except 10.)
01	All functions; the permanent I/O error occurred while reading or writing directory blocks.
02	Add and replace functions; the permanent I/O error occurred while writing an EOF mark after the member.

SYNADAF—Perform SYNAD Analysis Function (BDAM, BISAM, BPAM, BSAM, EXCP, QISAM, and QSAM)

The SYNADAF macro instruction is used in an error analysis routine to analyze permanent input/output errors. The routine can be a SYNAD routine specified in a data control block for BDAM, BISAM, BPAM, BSAM, QISAM, QSAM, or a routine that is entered directly from a program that uses the EXCP macro instruction. (The EXCP macro instruction is described in *OS/VS1 Data Management for System Programmers* and *OS/VS2 System Programming Library: Data Management*.)

The SYNADAF macro instruction uses register 1 to return the address of a buffer containing a message. The message describes the error, and can be printed by a subsequent PUT or WRITE macro instruction. The message consists of EBCDIC information and is in the form of a variable-length record. The format of the message is shown following the descriptions of the SYNADAF operands.

The system does not use the save area whose address is in register 13. Instead, it provides a save area for its own use, and then makes this area available to the error analysis routine. The system returns the address of the new save area in register 13 and in the appropriate location (word 3) of the previous save area; it also stores the address of the previous save area in the appropriate location (word 2) of the new save area.

The SYNADAF macro instruction passes parameters to the system in registers 0 and 1. When used in a SYNAD routine, the SYNADAF macro should be coded at the beginning of the routine (refer to Appendix A, Figures 4 through 6). For BISAM and QISAM, the SYNAD routine has to set up these parameters as explained under PARM1 and PARM2. To save these parameters for use by the SYNAD routine, the system stores them in a parameter save area that follows the message buffer as shown in the message buffer format. The system does not alter the return address in register 14 or the entry point address in register 15.

When a SYNADAF macro instruction is used, a SYNADRLS macro instruction must be used to release the message buffer and save areas, and to restore the original contents of register 13.

The SYNADAF macro instruction is written as follows:

[<i>symbol</i>]	SYNADAF	ACSMETH= {BDAM [<i>PARM1</i> = <i>parm register</i>] [<i>PARM2</i> = <i>parm register</i>] } {BPAM [<i>PARM1</i> = <i>parm register</i>] [<i>PARM2</i> = <i>parm register</i>] } {BSAM [<i>PARM1</i> = <i>parm register</i>] [<i>PARM2</i> = <i>parm register</i>] } {QSAM [<i>PARM1</i> = <i>parm register</i>] [<i>PARM2</i> = <i>parm register</i>] } {BISAM [<i>PARM1</i> = <i>dcbaddr</i>] [<i>PARM2</i> = <i>decb address</i>] } {EXCP [<i>PARM1</i> = <i>iob address</i>] } {QISAM [<i>PARM1</i> = <i>dcbaddr</i>] [<i>PARM2</i> = <i>parm register</i>] }
-------------------	---------	--

ACSMETH=BDAM, BPAM, BSAM, QSAM, BISAM, EXCP, or QISAM

The ACSMETH operand specifies the access method used to perform the input/output operation for which error analysis is performed.

PARM1=parm register, iobaddr, or dcbaddr—(2-12) or (1)

The PARM1 operand specifies the address of information that is dependent on the access method being used. For BDAM, BPAM, BSAM, or QSAM, the operand specifies a register that contains the information that was in register 1 on entry to the SYNAD routine. For BISAM or QISAM, the operand specifies the address of the data control block; for EXCP, it specifies the address of the input/output block. If the operand is omitted, PARM1=(1) is assumed.

PARM2=parm register—(2-12), (0), or RX-Type Address (only if ACSMETH=QISAM)

The PARM2 operand specifies the address of additional information that is dependent on the access method being used. For BDAM, BPAM, BSAM, QISAM, and QSAM, the operand specifies a register that contains the information that was in register 0 on entry to the SYNAD routine. For BISAM, the operand specifies a register that contains the information that was in register 1 on entry to the SYNAD routine (the address of the DECB). For EXCP, the operand is meaningless and should be omitted. If the operand is omitted, except in the case of EXCP, PARM2=(0) is assumed.

Note: For correctly loading the registers for SYNADAF for BISAM, you may code these two instructions before issuing the SYNADAF macro:

```
LR    0,1      GET DECB ADDRESS
L     1,8(1)   GET DCB ADDRESS
```

Completion Codes

When the system returns control to the problem program, the low-order byte of register 0 contains one of the following return codes; the three high-order bytes of register 0 are set to zero.


Hexadecimal

Code	Meaning
-------------	----------------

00	Successful completion. Bytes 8-13 of the message buffer contain blanks.
04	Successful completion. Bytes 8-13 of the message buffer contain binary data.
08	Unsuccessful completion. The message can be printed, but some information is missing in bytes 50-127 and is represented by asterisks. If byte 8 is a blank (X'40'), then bytes 9-13 are either blanks or are uninitialized. If byte 8 is not a blank, then data was read and bytes 8-13 of the message buffer contain binary data.

Message Buffer Format

The following illustration shows the format of the message buffer; the address of the buffer is returned in register 1.

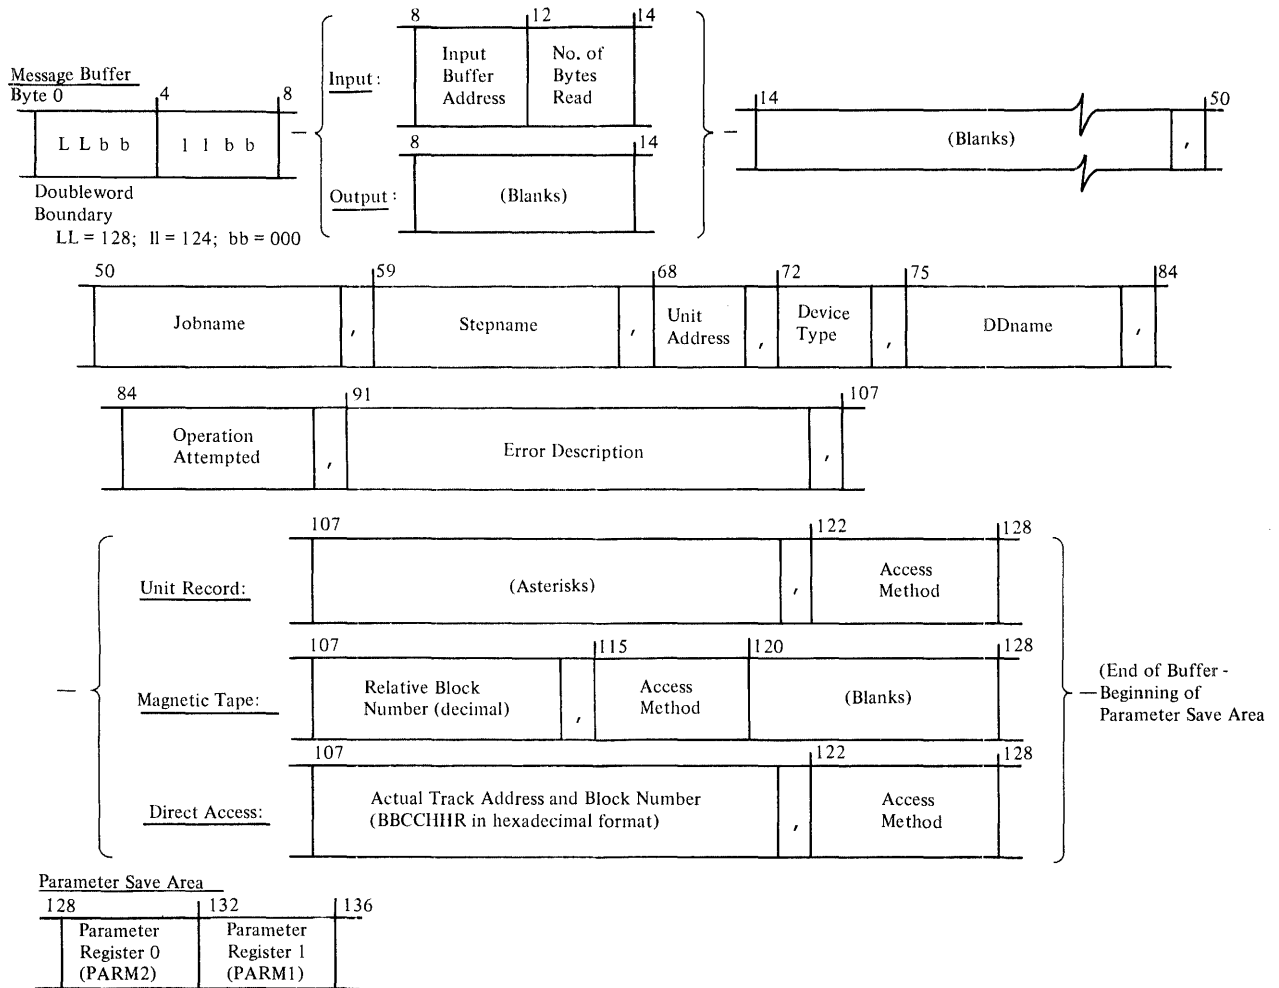

Notes:

- The device type field (bytes 72-73) contains UR for a unit record device, TA for a magnetic tape device, or DA for a direct-access device.
- If a message field (bytes 91-105) is not applicable to the type of error that occurred, it contains N/A or NOT APPLICABLE.
- If no data was transmitted, or if the access method is QISAM, bytes 8-13 contain blanks or binary zeros.
- If the access method is BISAM, bytes 68-70, 84-89, and 107-120 contain asterisks.
- If the access method is BDAM, and if the error was an invalid request, bytes 107-120 contain EBCDIC zeros.

SYNADRLS—Release SYNADAF Buffer and Save Areas (BDAM, BISAM, BPAM, BSAM, EXCP, QISAM, and QSAM)

The SYNADRLS macro instruction releases the message buffer, parameter save area, and register save area provided by a SYNADAF macro instruction. It must be used to perform this function whenever a SYNADAF macro instruction is used.

When the SYNADRLS macro instruction is issued, register 13 must contain the address of the register save area provided by the SYNADAF macro instruction. The control program loads register 13 with the address of the previous save area, and sets word 3 of that save area to zero. Thus, when control is returned, the save area pointers are the same as before the SYNADAF macro instruction was issued.

The SYNADRLS macro instruction is written as follows:

<i>[symbol]</i>	SYNADRLS	ᵇ
-----------------	-----------------	---

When the system returns control to the problem program, the low-order byte of register 0 contains one of the following return codes; the three high-order bytes of register 0 are set to zero.

Hexadecimal

Code	Meaning
00	Successful completion.
08	Unsuccessful completion. The buffer and save areas were not released; the contents of register 13 remain unchanged. Register 13 does not point to the save area provided by the SYNADAF macro instruction, or this save area is not properly chained to the previous save area.

TRUNC—Truncate an Output Buffer (QSAM Output—Fixed- or Variable-Length Blocked Records)

The TRUNC macro instruction causes the current output buffer to be regarded as full. The next PUT or PUTX macro instruction specifying the same data control block uses the next buffer to hold the logical record.

When a variable-length spanned record is being truncated and logical record interface is specified (that is, if **BFTEK=A** is specified in the DCB macro instruction, or if a **BUILDRCD** macro instruction is issued), the system segments and writes the record before truncating the buffer. Therefore, the block being truncated is the one that contains the last segment of the spanned record.

The TRUNC macro instruction is ignored if it is used for unblocked records; if it is used when a buffer is full, or if it is used without an intervening PUT or PUTX macro instruction.

The TRUNC macro instruction is written as follows:

[<i>symbol</i>]	TRUNC	<i>dcb address</i>
-------------------	--------------	--------------------

dcb address—RX-Type Address, (2-12), or (1)

The *dcb address* operand specifies the address of the data control block for the sequential data set opened for output. The record format in the data control block must not indicate standard blocked records (RECFM=FBS).

WAIT—Wait for One or More Events (BDAM, BISAM, BPAM, and BSAM)

The WAIT macro instruction is used to inform the control program that performance of the active task cannot continue until one or more specific events, each represented by a different ECB (event control block), have occurred. In the context of this manual, the ECBs represent completion of I/O processing associated with a READ or WRITE macro. ECBs are located at the beginning of access method DECBs (data event control blocks), so that the DECB name provided in READ and WRITE macros is also used for WAIT. A description of the ECB is found in “Appendix A” and in *OS/VS1 System Data Areas* and *OS/VS2 System Programming Library: Debugging Handbook*. For information on when to use the WAIT macro, see *OS/VS Data Management Services Guide*.

The control program takes the following action:

- For each event that has already occurred (each ECB is already posted), the count of the number of events is decreased by 1.
- If the number of events is 0 by the time the last event control block is checked, control is returned to the instruction following the WAIT macro instruction.
- If the number of events is not 0 by the time the last ECB is checked, control is not returned to the issuing program until sufficient ECBs are posted to bring the number to 0. Control is then returned to the instruction following the WAIT macro instruction.
- The events will be posted complete by the system when all I/O has been completed, temporary errors have been corrected, and length checking has been performed. The DECB is not checked for errors or exceptional conditions, nor are end-of-volume procedures initiated. Your program must perform these operations.

The WAIT macro instruction is written as follows:

[symbol]	WAIT	[number of events] {,ECB=addr ECBLIST=addr} [,LONG={YES <u>NO</u> }]
----------	------	--

number of events

Specifies a decimal integer from 0 to 255. Zero is an effective NOP instruction; one is assumed if the operand is omitted. The *number of events* must not exceed the number of event control blocks.

ECB=addr

Specifies the address of the event control block (or DECB) representing the single event that must occur before processing can continue. The operand is valid only if the *number of events* is specified as one or is omitted.

ECBLIST=addr

Specifies the address of a virtual storage area containing one or more consecutive fullwords on a fullword boundary. Each fullword contains the *address* of an event control block (or DECB); the high-order bit in the last word (address) must be set to 1 to indicate the end of the list. The number of event control blocks must be equal to or greater than the specified *number of events*.

LONG={YES | NO}

Specifies whether the task is entering a long wait or a regular wait. Normally I/O events should not be considered “long” unless it is anticipated that operator intervention will be required. This operand is valid only for VS2.

Caution: A job step with all of its tasks in a WAIT condition is terminated upon expiration of the time limits that apply to it.

Access method ECBs are maintained entirely by the access methods and supporting control program facilities. The user may inspect access method ECBs, but should never modify them.

WRITE—Write a Block (BDAM)

The WRITE macro instruction causes the system to add or replace a block in an existing direct data set. (This version of the WRITE macro instruction cannot be used to create a direct data set because no capacity record facilities are provided.) Control may be returned before the block is written. The output operation must be tested for completion using a CHECK or WAIT macro instruction. A data event control block, shown in Appendix A is constructed as part of the macro expansion.

The standard form of the WRITE macro instruction is written as follows (the list and execute forms are shown following the descriptions of the standard form):

[<i>symbol</i>]	WRITE	<i>decb name</i> , <i>type</i> , <i>dcb address</i> ,{ <i>area address</i> 'S'} ,{ <i>length</i> 'S'} ,{ <i>key address</i> 'S' 0} , <i>block address</i>
-------------------	--------------	---

decb name—symbol

The *decb name* operand specifies the name assigned to the data event control block created as part of the macro expansion.

type—{DA[F]}
{DI[F | X]}
{DK[F | X]}

The *type* operand is coded in one of the combinations shown to specify the type of write operation and optional services performed by the system:

DA

Specifies that a new data block is to be added to the data set in the first available space; the search for available space starts at the device address indicated in the area specified in the *block address* operand. Fixed-length records are added to a data set by replacing dummy records. Variable-length records are added to a data set by using available space on a track. For more information on adding records to a direct data set, see *OS/VS Data Management Services Guide*. The description of the DCB macro instruction, LIMCT operand, contains a description of the search.

DI

Specifies that a data block and key, if any, are to be written at the device address indicated in the area specified in the *block address* operand. Any attempt to write a capacity record (R0) is an invalid request when relative track addressing or actual device addressing are used, but when relative block addressing is used, relative block 0 is the first data block in the data set.

DK

Specifies that a data block (only) is to be written using the key in the area specified by the *key address* operand as a search argument; the search for the block starts at the device address indicated in the area specified in the *block address* operand. The description of the DCB macro instruction, LIMCT operand, contains a description of the search.

F

Requests that the system provide block position feedback into the area specified in the *block address* operand. This character can be coded as a suffix to **DA**, **DI**, or **DK** as shown above.

X

Requests that the system release the exclusive control requested by a previous **READ** macro instruction and provide block position feedback into the area specified in the *block address* operand. This character can be coded as a suffix to **DI** or **DK** as shown above.

dcf address—A-Type Address or (2-12)

The *dcf address* operand specifies the address of the data control block for the opened BDAM data set.

area address—A-Type Address, (2-12), or 'S'

The *area address* operand specifies the address of the area that contains the data block to be written. 'S' can be coded instead of an area address only if the data block (or key and data) are contained in a buffer provided by dynamic buffering; that is, 'S' was coded in the *area address* operand of the associated **READ** macro instruction. If 'S' is coded in the **WRITE** macro instruction, the area address from the **READ** macro instruction data event control block must be moved into the **WRITE** macro instruction data event control block; the buffer area acquired by dynamic buffering is released after the **WRITE** macro instruction is executed. See Appendix A for a description of the data event control block.

length—symbol, decimal digit, absexp, (2-12) or 'S'

The *length* operand specifies the number of data bytes to be written up to a maximum of 32,760. If 'S' is coded, it specifies that the system uses the value in the block size (DCBBLKSI) field as the length. When undefined-length records are used, if the **WRITE** macro instruction is for update and the length specified differs from the original block, the new block will be truncated or padded with binary zeros accordingly. The problem program can check for this situation in the **SYNAD** routine.

If the *length* operand is omitted for format-U records, no error indication is given when the program is assembled, but the problem program must insert a length into the data event control block before the **WRITE** macro instruction is executed.

key address—A-Type Address, (2-12), 'S', or 0

The *key address* operand specifies the address of the area that contains the key to be used. 'S' is specified instead of an address only if the key is contained in an area acquired by dynamic buffering. If the key is not written or used as a search argument, zero is specified instead of a key address.

block address—A-Type Address or (2-12)

The *block address* operand specifies the address of the area that contains the relative block address, relative track address, or actual device address used in the output operation. The length of the area depends on the type of addressing used and if the feedback option (OPTCD=F) is specified in the data control block.

If OPTCD=F has been specified in the DCB macro and F or X is specified in the **WRITE** macro, then you must provide a relative block address in the form specified by OPTCD in the DCB macro. For example, if OPTCD=R is specified, you must provide a 3-byte relative block address; if OPTCD=A is specified, you must provide an 8-byte actual device address (MBBCHHR); if neither is specified, you must provide a 3-byte relative block address (TTR).

If OPTCD=F has not been specified in the DCB macro and F or X is specified in the **WRITE** macro, then you must provide an 8-byte actual device address (MBBCHHR) even if relative block or relative track addressing is being used.

WRITE—Write a Logical Record or Block of Records (BISAM)

The WRITE macro instruction causes the system to add or replace a record or replace an updated block in an existing indexed sequential data set. Control may be returned to the problem program before the block or record is written. The output operation must be tested for completion using a WAIT or CHECK macro instruction. A data event control block, shown in Appendix A, is constructed as part of the macro expansion.

The standard form of the WRITE macro instruction is written as follows (the list and execute forms are shown following the descriptions of the standard form):

[<i>symbol</i>]	WRITE	<i>decb name</i> , <i>type</i> , <i>dcb address</i> , { <i>area address</i> 'S' } , { <i>length</i> 'S' } , <i>key address</i>
-------------------	--------------	---

decb name—symbol

The *decb name* operand specifies the name assigned to the data event control block created as part of the macro expansion.

type—{K | KN}

The *type* operand is coded as shown to specify the type of write operation:

K

Specifies that either an updated unblocked record or a block containing an updated record is to be written. If the record has been read using a READ KU macro instruction, the data event control block for the READ macro instruction must be used as the data event control block for the WRITE macro instruction, using the execute form of the WRITE macro instruction.

KN

Specifies that a new record is to be written, or a variable-length record is to be rewritten with a different length. All records or blocks of records read using READ KU macro instructions for the same data control block must be written back before a new record can be added except when the READ KU and WRITE KN refer to the same DECB.

dcb address—A-Type Address or (2-12)


The *dcb address* operand specifies the address of the data control block for the opened existing indexed sequential data set. If a block is written, the data control block address must be the same as the *dcb address* operand in the corresponding READ macro instruction.

area address—A-Type Address, (2-12), or 'S'

The *area address* operand specifies the address of the area containing the logical record or block of records to be written. The first sixteen bytes of this area are used by the system and should not contain your data. The *area address* must specify a different area than the *key address*. When new records are written (or when variable-length records are rewritten with a different length), the area address of the new record must always be supplied by the problem program. This area may be altered by the system. 'S' may be coded instead of an address only if the block of records is contained in an area provided by dynamic buffering; that is, 'S' was coded

for the *area address* operand in the associated READ KU macro instruction. This area is released after execution of a WRITE macro instruction using the same DECB. The area can also be released by a FREEDBUF macro instruction.

The following illustration shows the format of the area:

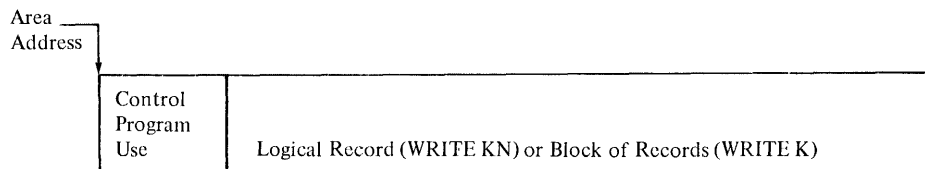

Indexed sequential buffer and work area requirements are discussed in *OS/VS Data Management Services Guide*.

length—symbol, decimal digit, absexp, (2-12) or 'S'

The *length* operand specifies the number of data bytes to be written, up to a maximum of 32,760. Specify 'S' unless a variable-length record will be rewritten with a different length.

key address—A-Type Address or (2-12)

The *key address* operand specifies the address of the area containing the key of the new or updated record. The *key address* must specify a different area than the *area address*. For blocked records, this is not necessarily the high key in the block. For unblocked records, this field should not overlap with the work area specified in the MSWA parameter of the DCB macro instruction.

Note: When new records are written, the key area may be altered by the system.

WRITE—Write a Block (BPAM and BSAM)

The WRITE macro instruction causes the system to add or replace a block in a sequential or partitioned data set being created or updated. Control may be returned to the program before the block is written. The output operation must be tested for completion using the CHECK macro instruction. A data event control block, shown in Appendix A, is constructed as part of the macro expansion.

If translation from EBCDIC code to ASCII code is requested, issuing multiple WRITE macro instructions for the same record causes an error because the first WRITE macro instruction issued causes the output data in the output buffer to be translated into ASCII code.

If the OPEN macro instruction specifies UPDAT, both the READ and WRITE macro instructions must refer to the same data event control block. Refer to the list form of the READ or WRITE macro instruction for a description of how to construct a data event control block; refer to the execute form of the READ or WRITE macro instruction for a description of modifying an existing data event control block.

The standard form of the WRITE macro instruction is written as follows (the list and execute forms are shown following the descriptions of the standard form):

[<i>symbol</i>]	WRITE	<i>decb name</i> ,SF , <i>dcb address</i> , <i>area address</i> [, <i>length</i> ,‘S’]
-------------------	--------------	--

decb name—symbol

The *decb name* operand specifies the name assigned to the data event control block created as part of the macro expansion.

SF

Specifies normal, sequential, forward operation.

dcb address—A-Type Address, or (2-12)

The *dcb address* operand specifies the address of the data control block for the opened data set being created or processed. If the data set is being updated, the data control block address must be the same as the *dcb address* operand in the corresponding READ macro instruction.

area address—A-Type Address or (2-12)

The *area address* operand specifies the address of the area that contains the data block to be written; if a key is written, the key must precede the data in the same area.

length—symbol, decimal digit, absexp, (2-12) or ‘S’

The *length* operand specifies the number of bytes to be written; this operand is specified for only undefined-length records (RECFM=U) or ASCII records (RECFM=D) when the DCB BUFOFF operand is zero. If the data is to be translated from EBCDIC code to ASCII code, the maximum length is 2,048; otherwise, the maximum length is 32,760 bytes. ‘S’ can be coded to indicate that the value specified in the block size (DCBBLKSI) field of the data control block is used as the length to be written. The *length* operand should be omitted for all record formats except format-U and format-D (when BUFOFF=0).

If the *length* operand is omitted for format-U or format-D (with BUFOFF=0) records, no error indication is given when the program is assembled, but the problem program must insert a length into the data event control block before the WRITE macro is issued.

WRITE—Write a Block (Create a BDAM Data Set with BSAM)

The WRITE macro instruction causes the system to add a block to the direct data set being created. For fixed-length blocks, the system writes the capacity record automatically when the current track is filled; for variable and undefined-length blocks, a WRITE macro instruction must be issued for the capacity record. Control may be returned before the block is written. The output operations must be tested for completion using a CHECK macro instruction. A data event control block, shown in Appendix A, is constructed as part of the macro expansion.

The standard form of the WRITE macro instruction is written as follows (the list and execute forms are shown following the descriptions of the standard form):

[<i>symbol</i>]	WRITE	<i>decb name</i> , <i>type</i> , <i>dcb address</i> , <i>area address</i> [, <i>length</i> ,'S'] [, <i>next address</i>]
-------------------	--------------	---

decb name—symbol

The *decb name* operand specifies the name assigned to the data event control block created as part of the macro expansion.

type—{SF | SFR | SD | SZ}

The *type* operand is coded as shown, to specify the type of write operation performed by the system:

SF

Specifies that a new data block is to be written in the data set.

SFR

Specifies that a new variable-length spanned record is to be written in the data set, and next address feedback is requested. This operand can be specified only for variable-length spanned records (BFTEK=R and RECFM=VS are specified in the data set control block).

SD

Specifies that a dummy data block is to be written in the data set; dummy data blocks can be written only when fixed-length records with keys are used.

SZ

Specifies that a capacity record (R0) is to be written in the data set; capacity records can be written only when variable-length or undefined-length records are used.

dcb address—A-Type Address or (2-12)

The *dcb address* operand specifies the address of the data control block opened for the data set being created. DSORG=PS (or PSU) and MACRF=WL must be specified in the DCB macro instruction to create a BDAM data set.

area address—A-Type Address or (2-12)

The *area address* operand specifies the address of the area that contains the data block to be added to the data set. If keys are used, the key must precede the data in the same area. For writing capacity records (SZ), the area address is ignored and can be omitted (the system supplies the information for the capacity record). For writing dummy data blocks (SD), the area need be only large enough to hold the key plus one

data byte. The system constructs a dummy key with the first byte set to all one bits (hexadecimal FF) and adds the block number in the first byte following the key. When a dummy block is written, a complete block is written from the area immediately following the area address; therefore, the area address plus the value specified in the BLKSIZE operand must be within the area allocated to the program writing the dummy blocks.

length—symbol, decimal digit, absexp, (2-12), or 'S'

The *length* operand is used only when undefined-length (RECFM=U) blocks are being written. The operand specifies the length of the block, in bytes, up to a maximum of 32,760. If 'S' is coded, it specifies that the system is to use the length in the block size (DCBBLKSI) field of the data control block as the length of the block to be written.

If the *length* operand is omitted for format-U records, no error indication is given when the program is assembled, but the problem program must insert a length into the data event control block before the WRITE is issued.

next address—A-Type Address or (2-12)

The *next address* operand specifies the address of the area where the system places the relative track address of the next record to be written. Next address feedback can be requested only when variable-length spanned records are used.

Note: When variable-length spanned records are used (RECFM=VS and BFTEK=R are specified in the data control block), the system writes capacity records (R0) automatically in the following cases:

- When a record spans a track.
- When the record cannot be written completely on the current volume. In this case, all capacity records of remaining tracks on the current volume are written; tracks not written for this reason are still counted in the search limit specified in the LIMCT operand of the data control block.
- When the record written is the last record on the track, the remaining space on the track cannot hold more than eight bytes of data.

Completion Codes

After the write has been scheduled and control has been returned to the user's program, the three high-order bytes of register 15 are set to zero; the low-order byte contains one of the following return codes:

Return Code	Meaning	
	Fixed-Length (SF or SD)	Variable or Undefined-Length (SF or SFR) (SZ)
00	Block will be written. (If the previous return code was 08, a block is written only if the DD statement specifies secondary space allocation and sufficient space is available.	Block will be written. (If the previous return code was 08, a block is written only if the DD statement specifies secondary space allocation and sufficient space is available.
04	Block will be written, followed by a capacity record.	Block was not written; write a capacity record (SZ) to describe the current track, then reissue.
08	Block will be written, followed by capacity record. The next block requires secondary space allocation.	Capacity record was written. The next block requires secondary space allocation. This code is not issued if the WRITE SZ is the only WRITE macro instruction issued on a one-track secondary extent.
0C	Block will not be written; issue a CHECK macro instruction for the previous WRITE macro instruction, then reissue the WRITE macro instruction.	Block will not be written; issue a CHECK macro instruction for the previous WRITE macro instruction, then reissue the WRITE macro instruction.

WRITE—List Form

The list form of the WRITE macro instruction is used to construct a data management parameter list in the form of a data event control block (DECB). Refer to Appendix A for a description of the various fields in the DECB for each access method.

The description of the standard form of the WRITE macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates the operands used for each access method as well as the meaning of 'S' when coded for the *area address*, *length*, and *key address* operands. For each access method, 'S' can be coded only for those operands for which it can be coded in the standard form of the macro instruction. The format description below indicates the optional and required operands in the list form only.

The list form of the WRITE macro instruction is written as follows:

[<i>symbol</i>]	WRITE	<i>decb name</i> , <i>type</i> , [<i>dcb address</i>] , [<i>area address</i> 'S'] , [<i>length</i> 'S'] , [<i>key address</i> 'S'] , [<i>block address</i>] , [<i>next address</i>] , MF=L
-------------------	--------------	---

decb name—symbol

type—Code one of the types shown in the standard form

dcb address—A-Type Address

area address—A-Type Address or 'S'

length—symbol, decimal digit, absexp, or 'S'

key address—A-Type Address or 'S'

block address—A-Type Address

next address—A-Type Address

MF=L—Coded as shown

The MF=L operand specifies that the WRITE macro instruction is used to create a data event control block that will be referenced by an execute-form instruction.

WRITE—Execute Form

A remote data management parameter list (data event control block) is used in, and can be modified by, the execute form of the WRITE macro instruction. The data event control block can be generated by the list form of either a READ or WRITE macro instruction.

The description of the standard form of the WRITE macro instruction provides the explanation of the function of each operand. The description of the standard form also indicates the operands used for each access method, as well as the meaning of 'S' when coded for the *area address*, *length*, and *key address* operands. For each access method, 'S' can be coded only for those operands for which it can be coded in the standard form of the macro instruction. The format description below indicates the optional and required operands in the execute form only.

The execute form of the WRITE macro instruction is written as follows:

[<i>symbol</i>]	WRITE	<i>decb address</i> , <i>type</i> , [<i>dcb address</i>] , [<i>area address</i> 'S'] , [<i>length</i> 'S'] , [<i>key address</i> 'S'] , [<i>block address</i>] , [<i>next address</i>] , MF=E
-------------------	--------------	--

decb address—RX-Type Address or (2-12)

type—Code one of the types shown in the standard form

dcb address—RX-Type Address or (2-12)

area address—RX-Type Address, (2-12), or 'S'

length—symbol, decimal digit, absexp, (2-12), or 'S'

key address—RX-Type Address, (2-12), or 'S'

block address—RX-Type Address or (2-12)

next address—RX-Type Address or (2-12)

MF=E—Coded as shown

The **MF=E** operand specifies that the execute form of the WRITE macro instruction is used, and an existing data event control block (specified in the *decb address* operand) is to be used by the access method.

XLATE—Translate to and from ASCII (BSAM and QSAM)

The XLATE macro instruction is used to translate the data in an area in virtual storage from ASCII code to EBCDIC code or from EBCDIC code to ASCII code.

The XLATE macro instruction is written as follows:

[<i>symbol</i>]	XLATE	<i>area address</i> , <i>length</i> [,TO={A <u>E</u> }]
-------------------	-------	---

area address—RX-Type Address, symbol, decimal digit, *absexp*, (2-12), or (1)

The *area address* operand specifies the address of the area that is to be translated.

length—symbol, decimal digit, *absexp*, (2-12), or (0)

The *length* operand specifies the number of bytes to be translated.

TO={A | E}

The TO operand specifies the type of translation that is requested. If this operand is omitted, E is assumed. The following describes the characters that can be specified:

A

Specifies that translation from EBCDIC code to ASCII code is requested.

E

Specifies that translation from ASCII code to EBCDIC code is requested.

APPENDIX A: STATUS INFORMATION FOLLOWING AN INPUT/OUTPUT OPERATION

Following an input/output operation, the control program makes certain status information available to the problem program. This information is a 2-byte exception code, or a 16-byte field of standard status indicators, or both.

Exception codes are provided in the data control block (QISAM), or in the data event control block (BISAM and BDAM). The data event control block is described below, and the exception code lies within the block as shown in the illustration for the data event control block. If a DCBD macro instruction is coded, the exception code in a data control block can be addressed as two 1-byte fields, DCBEXCD1 and DCBEXCD2. The exception codes can be interpreted by referring to Figures 1-3.

Status indicators are available only to the error analysis routine designated by the SYNAD entry in the data control block. A pointer to the status indicators is provided either in the data event control block (BSAM, BPAM, and BDAM), or in register 0 (QISAM and QSAM). The contents of registers on entry to the SYNAD routine are shown in Figures 4-6; the status indicators are shown in Figure 7.

Data Event Control Block

A data event control block is constructed as part of the expansion of READ and WRITE macro instructions and is used to pass parameters to the control program, help control the read or write operation, and receive indications of the success or failure of the operation. The data event control block is named by the READ or WRITE macro instruction, begins on a fullword boundary, and contains the information shown in the following illustration:

Offset From DECB Address (Bytes)	Field Contents		
	BSAM and BPAM	BISAM	BDAM
0	ECB	ECB	ECB ¹
+4	Type	Type	Type
+6	Length	Length	Length
+8	DCB address	DCB address	DCB address
+12	Area address	Area address	Area address
+16	IOB address	Logical record address	IOB address
+20		Key address	Key address
+24		Exception code (2 bytes)	Block address
+28			Next address

¹Exception codes are returned in bytes 2 and 3 of the ECB by the control program.

The event control block (ECB) is used by the control program to test for completion of the read or write operation. The ECB is located in the first word of the DECB.

The type, length, data control block address, area address, key address, block address, and next address information is taken from the operands of the macro instruction and placed in the DECB for use by the control program. For BISAM, exception codes are returned by the control program after the corresponding WAIT or CHECK macro instruction is issued, as indicated in Figure 1. For BDAM, BSAM, BPAM, and QSAM, the control program provides a pointer to the IOB containing the status indicators shown in Figure 7.

Exception Code Bit in DECB	READ	WRITE	Condition if On
0	X	Type K	Record not found
1	X	X	Record length check
2		Type KN	Space not found
3		Type K	Invalid request
4	X	X	Uncorrectable I/O error
5	X	X	Unreachable block
6	X		Overflow record ¹
7		Type KN	Duplicate record
8-15		8-15	Reserved for control program use

¹The SYNAD routine is entered only if the CHECK macro is issued after the READ macro, and bit 0, 4, 5, or 7 is also on.

Figure 1. Exception Code Bits—BISAM

Notes for Figure 1:

Record Not Found: This condition is reported if the logical record with the specified key is not found in the data set, if the specified key is higher than the highest key in the highest level index, or if the record is not in either the prime area or the overflow area of the data set.

Record Length Check: This condition is reported, for READ and update WRITE macro instructions, if an overriding length is specified and (1) the record format is blocked, (2) the record format is unblocked but the overriding length is greater than the length known to the control program, or (3) the record is fixed length and the overriding length does not agree with the length known to the control program. This condition is reported for the add WRITE macro instruction if an overriding length is specified.

When blocked records are being updated, the control program must find the high key in the block in order to write the block. (The high key is not necessarily the same as the key supplied by the problem program.) The high key is needed for writing because the control unit for direct-access devices permits writing only if a search on equal is satisfied; this search can be satisfied only with the high key in the block. If the user were permitted to specify an overriding length shorter than the block length, the high key might not be read; then, a subsequent write request could not be satisfied. In addition, failure to write a high key during update would make a subsequent update impossible.

Space Not Found in Which to Add a Record: This condition is reported if no room exists in either the appropriate cylinder overflow area or the independent overflow area when a new record is to be added to the data set. The data set is not changed in any way in this situation.

Invalid Request: This condition is reported for either of two reasons. First, if byte 25 of the data event control block indicates that this request is an update WRITE macro instruction corresponding to a READ (for update) macro instruction, but the input/output block (IOB) for the READ is not found in the update queue. This condition could be caused by the problem program altering the contents of byte 25 of the data event control block. Second, if a READ or WRITE macro instruction specifies dynamic buffering (that is, 'S' in the *area address* operand) but the DCBMACRF field of the data control block does not specify dynamic buffering.

Uncorrectable Input/Output Error: This condition is reported if the control program's error recovery procedures encounter an uncorrectable error in transferring data.

Unreachable Block: This condition is reported if an uncorrectable input/output error occurs while searching the indexes or following an overflow chain. It is also posted if the data field of an index record contains an improper address (that is, points to the wrong cylinder or track or is an invalid address).

Overflow Record: This condition is reported if the record just read is an overflow record. (See the section on direct retrieval and update of an indexed sequential data set in *OS/VS Data Management Services Guide* for consideration during BISAM updating.)

Duplicate Record Presented for Inclusion in the Data Set: This condition is reported if the new record to be added has the same key as a record in the data set. However, if the delete option was specified and the record in the data set is marked for deletion, this condition is not reported. Instead the new record replaces the existing record.

If the record format is blocked and the relative key position is zero, the new record cannot replace an existing record that is of equal key and is marked for deletion.

Notes for Figure 2:

Record Not Found: This condition is reported if the logical record with the specified key is not found in the data set, if the specified key is higher than the highest key in the highest level index, or if the record is not in either the prime area or the overflow area of the data set.

Invalid Actual Address for Lower Limit: This condition is reported if the specified lower limit address is outside the space allocated to the data set.

Space Not Found in Which to Add a Record: This condition is reported if the space allocated to the data set is already filled. In the locate mode, a buffer segment address is not provided. In the move mode, data is not moved.

Invalid Request: This condition is reported if (1) the data set is already being referred to sequentially by the problem program, (2) the buffer cannot contain the key and the data, or (3) the specified type is not also specified in the DCBMACRF field of the data control block.

Exception Code		Code Set by					Condition if On
Field	Bit	CLOSE	GET	PUT	PUTX	SETL	
DCBEXCD1	0					Type K	Record Not Found
	1					Type I	Invalid actual address for lower limit
	2			X			Space not found in which to add a record
	3					X	Invalid request
	4			X			Uncorrectable input error
	5	X			X	X	Uncorrectable output error
	6			X			X
7	X	X					Block could not be reached (update)
DCBEXCD2	0			X			Sequence check
	1			X			Duplicate record
	2	X					Data control block closed when error routine entered
	3		X				Overflow record ¹
	4			X			Incorrect record length
5-7						Reserved for future use	

¹The SYNAD routine is entered only if bit 4, 5, 6, or 7 of DCBEXCD1 is also on.

Figure 2. Exception Code Bits—QISAM

Uncorrectable Input Error: This condition is reported if the control program's error recovery procedures encounter an uncorrectable error when transferring a block from secondary storage to an input buffer. The buffer address is placed in register 1, and the SYNAD routine is given control when a GET macro instruction is issued for the first logical record.

Uncorrectable Output Error: This condition is reported if the control program's error recovery procedures encounter an uncorrectable error when transferring a block from an output buffer to secondary storage. If the error is encountered during closing of the data control block, bit 2 of DCBEXCD2 is set to 1 and the SYNAD routine is given control immediately. Otherwise, control program action depends on whether load mode or scan mode is being used.

If a data set is being created (load mode), the SYNAD routine is given control when the next PUT or CLOSE macro instruction is issued. In the case of a failure to write a data block, register 1 contains the address of the output buffer, and register 0 contains the address of a work area containing the first 16 bytes of the IOB; for other errors, the contents of register 1 are meaningless. After appropriate analysis, the SYNAD routine should close the data set or end the job step. If records are to be subsequently added to the data set using the queued indexed sequential access method (QISAM), the job step should be terminated by issuing an ABEND macro instruction. (ABEND closes all open data sets. However, an ISAM data set is only partially closed, and it can be reopened in a later job to add additional records by using QISAM). Subsequent execution of a PUT macro instruction would cause reentry to the SYNAD routine, since an attempt to continue loading the data set would produce unpredictable results.

If a data set is being processed (scan mode), the address of the output buffer in error is placed in register 1, the address of a work area containing the first 16 bytes of the IOB is placed in register 0, and the SYNAD routine is given control when the next GET macro instruction is issued. Buffer scheduling is suspended until the next GET macro instruction is reissued.

Block Could Not be Reached (Input): This condition is reported if the control program's error recovery procedures encounter an uncorrectable error in searching an index or overflow chain. The SYNAD routine is given control when a GET macro instruction is issued for the first logical record of the unreachable block.

Block Could Not be Reached (Output): This condition is reported if the control program's error recovery procedures encounter an uncorrectable error in searching an index or overflow chain.

If the error is encountered during closing of the data control block, bit 2 of DCBEXCD2 is set to 1 and the SYNAD routine is given control immediately. Otherwise, the SYNAD routine is given control when the next GET macro instruction is issued.

Sequence Check: This condition is reported if a PUT macro instruction refers to a record whose key has a smaller numerical value than the key of the record previously referred to by a PUT macro instruction. The SYNAD routine is given control immediately; the record is not transferred to secondary storage.

Duplicate Record: This condition is reported if a PUT macro instruction refers to a record whose key duplicates that of the record previously referred to by a PUT macro instruction. The SYNAD routine is given control immediately; the record is not transferred to secondary storage.

Data Control Block Closed When Error Routine Entered: This condition is reported if the control program's error recovery procedures encounter an uncorrectable output error during closing of the data control block. Bit 5 or 7 of DCBEXCD1 is set to 1, and the SYNAD routine is immediately given control. After appropriate analysis, the SYNAD

routine must branch to the address in return register 14 so that the control program can finish closing the data control block.

Overflow Record: This condition is reported if the input record is an overflow record.

Incorrect Record Length: This condition is reported if the length of the record as specified in the record-descriptor word (RDW) is larger than the value in the DCBLRECL field of the data control block.

Exception Code Bit	READ	WRITE	Condition if On
0	X	X	Record not found
1	X	X	Record length check
2		X	Space not found
3	X	X	Invalid request—see bits 9-15
4	X	X	Uncorrectable I/O error
5	X	X	End of data
6	X	X	Uncorrectable error
7		Type X	Not read with exclusive control
8			Not used
9		X	WRITE to input data set
10	X	X	Extended search with DCBLIMCT=0
11	X	X	Block or track requested was outside data set
12		X	Tried to write capacity record
13	X	X	Specified key as search argument when KEYLEN=0 or no key address supplied
14	X	X	Request for options not in data control block
15		X	Attempt to add fixed-length record with key beginning with hexadecimal FF

Figure 3. Exception Code Bits—BDAM

Notes for Figure 3:

Record Not Found: This condition is reported if the search argument is not found in the data set.

Record Length Check: This condition occurs for READ and WRITE (update) and WRITE (add). For WRITE (update) variable-length records only, the length in the BDW does not match the length of the record to be updated. For all remaining READ and WRITE (update) conditions the BLKSIZE, when 'S' is specified in the READ or WRITE macro, or the length given with these macros does not agree with the actual length of the record. For WRITE (add), fixed-length records, the BLKSIZE, when 'S' is specified in the WRITE macro, or the length given with this macro does not agree with the actual length of the record. For WRITE (add), all other conditions, no error can occur.

Space Not Found in Which to Add a Record: This condition occurs if either, there is no dummy record when adding an F-format record, or there is no space available when adding a V or U-format record.

Invalid Request: Occurs whenever one of the following bits are set to one:

Bit	Meaning
9	A WRITE was attempted for an input data set.
10	An extended search was requested, but LIMCT was zero.
11	The relative block or relative track requested was not in the data set.
12	Writing a capacity record (R0) was attempted.
13	A READ or WRITE with key was attempted, but either KEYLEN equaled zero or the key address was not supplied.
14	The READ or WRITE macro options conflict with the OPTCD or MACRF parameters.
15	A WRITE (add) with fixed-length was attempted with the key beginning with X'FF'.

Uncorrectable Input/Output Error: This condition is reported if the control program's error recovery procedures encounter an uncorrectable error in transferring data between real and secondary storage.

End of Data: This only occurs as a result of a READ (type DI, DIF, or DIX) when the record requested is an end-of-data record.

Uncorrectable error: Same conditions as for bit 4.

Not Read With Exclusive Control: A WRITE, type DIX or DKX, has occurred for which there is no previous corresponding READ with exclusive control.

Register	Bits	Meaning
0	0-7	Not used.
	8-31	Address of a work area containing the first 16 bytes of the IOB (after an uncorrectable input/output error caused by a GET, PUT, or PUTX macro instruction; original contents destroyed in other cases). If the error condition was detected before I/O was started, register 0 contains all zeros.
1	0-7	Not used.
	8-31	Address of the buffer containing the error record (after an uncorrectable input/output error caused by a GET, PUT, or PUTX macro instruction while attempting to read or write a data record; in other cases this register contains 0).
2-13	0-31	Contents that existed before the macro instruction was issued.
14	0-7	Not used.
	8-31	Return address. This address is either an address in the control program's Close routine (bit 2 of DCBEXCD2 is on), or the address of the instruction following the expansion of the macro instruction that caused the SYNAD routine to be given control (bit 2 of DCBEXCD2 is off).
15	0-7	Not used.
	8-31	Address of the SYNAD routine.

Figure 4. Register Contents on Entry to SYNAD Routine—QISAM

Register	Bits	Meaning
0	0-7	Not used.
	8-31	Address of the first IOB sense byte. (Sense information is valid only when associated with a unit check condition.)
1	0-7	Not used.
	8-31	Address of the DECB.
2-13	0-31	Contents that existed before the macro instruction was issued.
14	0-7	Not used.
	8-31	Return address.
15	0-7	Not used.
	8-31	Address of the SYNAD routine.

Figure 5. Register Contents on Entry to SYNAD Routine—BISAM

Register	Bits	Meaning
0	0-7	Value to be added to the status indicators address to provide the address of the first CCW (QSAM only).
	8-31	Address of the associated data event control block for BDAM, BPAM, and BSAM; address of the status indicators shown in Figure 7 for QSAM.
1	0	Bit is on for error caused by input operation.
	1	Bit is on for error caused by output operation.
	2	Bit is on for error caused by BSP, CNTRL, or POINT macro instruction (BPAM AND BSAM only).
	3	Bit is on if error occurred during update of existing record or if error did not prevent reading of the record. Bit is off if error occurred during creation of a new record or if error prevented reading of the record.
	4	Bit is on if the request was invalid. The status indicators pointed to in the data event control block are not present (BDAM, BPAM, and BSAM only).
	5	Bit is on if an invalid character was found in paper tape conversion (BSAM and QSAM only).
	6	Bit is on for a hardware error (BDAM only).
	7	Bit is on if no space was found for the record (BDAM only).
8-31	Address of the associated data control block.	
2-13	0-31	Contents that existed before the macro instruction was issued.
14	0-7	Not used.
	8-31	Return address.
15	0-7	Not used.
	8-31	Address of the error analysis routine.

Figure 6. Register Contents on Entry to SYNAD Routine—BDAM, BPAM, BSAM, and QSAM

Offset From IOB Address			
Byte	Bit	Meaning	Name
+2	0	Command reject	Sense byte 1
	1	Intervention required	
	2	Bus-out check	
	3	Equipment check	
	4	Data check	
	5	Overrun	
	6,7	Device-dependent information; refer to the appropriate device manual	
+3	0-7	Device-dependent information; refer to the appropriate device manual	Sense byte 2

The following bytes make up the low-order seven bytes of the channel status word:

+9	—	Command address	
+12	0	Attention	Status byte 1 (Unit)
	1	Status modifier	
	2	Control unit end	
	3	Busy	
	4	Channel end	
	5	Device end	
	6	Unit check—must be on for sense bytes to be meaningful	
	7	Unit exception	
+13	0	Program-controlled interrupt	Status byte 2 (Channel)
	1	Incorrect length	
	2	Program check	
	3	Protection check	
	4	Channel data check	
	5	Channel control check	
	6	Interface control check	
	7	Chaining check	
+14	—	Count field (2 bytes)	

Figure 7. Status Indicators for the SYNAD Routine—BDAM, BPAM, BSAM, and QSAM

Note: If the sense bytes are X'10FE', the control program has set them to this invalid combination because sense bytes could not be obtained from the device due to reoccurrence of unit checks.

APPENDIX B: DATA MANAGEMENT MACRO INSTRUCTIONS AVAILABLE BY ACCESS METHOD

Macro Instruction	BDAM	BISAM	BPAM	BSAM	QISAM	QSAM
BLDL			X			
BSP				X		
BUILD	X	X	X	X	X	X
BUILDRCD						X
CHECK	X	X	X	X		
CHKPT	X	X	X	X	X	X
CLOSE	X	X	X	X	X	X
CNTRL				X		X
DCB	X	X	X	X	X	X
DCBD	X	X	X	X	X	X
ESETL					X	
FEOV				X		X
FIND			X			
FREEBUF	X	X	X	X		
FREEDBUF	X	X				
FREEPOOL	X	X	X	X	X	X
GET					X	X
GETBUF	X	X	X	X		
GETPOOL	X	X	X	X	X	X
NOTE			X	X		
OPEN	X	X	X	X	X	X
PDAB						X
PDABD						X
POINT			X	X		
PRTOV				X		X
PUT					X	X
PUTX					X	X
READ	X	X	X	X		
RELEX	X					
RELSE					X	X
SETL					X	
SETPRT				X		X
STOW			X			
SYNADAF	X	X	X	X	X	X
SYNADRLS	X	X	X	X	X	X
TRUNC						X
WAIT	X	X	X	X		
WRITE	X	X	X	X		
XLATE				X		X

APPENDIX C: DEVICE CAPACITIES

The following information provides a guide to coding the block size (BLKSIZE) and logical record length (LRECL) operands in the DCB macro instruction. These values can be used to determine the maximum block size and logical record length for a given device, and they can be used to determine the optimum blocking factor when records are to be blocked.

Card Readers and Card Punches

Format F, V, or U records are accepted by readers and punches but the logical record length for a card reader or card punch is fixed at 80 bytes. The logical record length for an IBM 2596 Card Reader is 96 bytes. If the optional control character is specified, the logical record length is 81 (the control character is not part of the data record). If card image mode is used, the buffer required to contain the data must be 160 bytes.

Printers

The following shows the record length that can be specified for the various printers. In some cases, two values are shown; the larger of the two values requires that an optional feature be installed on the printer being used. If the optional control character is specified to control spacing and skipping, the record length is specified as one greater than the actual data length (the control character is not part of the data record).

1403 printer	— 120 or 132 bytes
1443 printer	— 120 or 144 bytes
3211 printer	— 132 or 150 bytes
1052 printer keyboard	— 130 bytes (supported only by the EXCP access method)
3210 printer keyboard	— 130 bytes (supported only by the EXCP access method)
3215 printer keyboard	— 130 bytes (supported only by the EXCP access method)
3525 card punch, print feature	— 64 bytes

Paper-Tape Reader

2671 paper tape—32,760 bytes

Magnetic-Tape Units

2400/3400 magnetic-tape units—32,760

(7 tracks and 9 tracks)

Direct-Access Devices

The following table shows the capacity of direct-access devices by track, cylinder, and total capacity in bytes.

Device	Volume Type	Maximum Block-size/Track ¹	Tracks/Cylinder	Number of Cylinders ²	Total Capacity ^{1,2}
2305-1	Drum	14136	8	48	5,428,224
2305-2	Drum	14660	8	96	11,258,880
2314/2319	Disk	7294	20	200	29,176,000
3330/3333 (Model 1) ³	Disk	13030	19	404	100,018,280
3330/3333 (Model 11)	Disk	13030	19	808	200,036,560
3340	Disk	8368	12	696	
				(70-megabytes)	69,889,536
				348	
				(35-megabytes)	34,944,768

¹Capacity indicated in bytes (when R0 is used by the IBM programming system).

²Excluding alternate cylinders.

³The Mass Storage System (MSS) virtual volumes assume the characteristics of the 3330/3333, Model 1.

Each record written on a direct-access device requires some "device overhead." The term device overhead means the space required by the device for address markers, count areas, gaps between the count, key, and data areas, and gaps between blocks. The following formulas can be used to compute the number of bytes required for each data block including the space required for device overhead. Note that any fraction of a byte must be ignored. For example, if the formula computation results in 15.644 bytes, 15 bytes must be used to determine track capacity.

Device	Track Capacity	Bytes Required by Each Data Block	
		Blocks With Keys Bi	Blocks Without Keys Bi
2305-1	14568 ¹	634+KL+DL	432+DL
2305-2	14858 ¹	289+KL+DL	198+DL
2314/2319	7294	146+((KL+DL)*534)/512 ²	101+(DL)534/512 ³
3330/3333 (Model 1) ⁴	13165 ¹	191+KL+DL	135+DL
3330/3333 (Model 11)	13165 ¹	191+KL+DL	135+DL
3340	8535 ¹	242+KL+DL	167+DL

Bi is any block on the track.

DL is data length.

KL is key length.

¹This value is different from the maximum block size per track because the formula for the last block on the track includes an overhead for this device.

²The formula for the last block on the track is 45+KL+DL.

³The formula for the last block on the track is DL.

⁴The Mass Storage System (MSS) virtual volumes assume the characteristics of the 3330/3333, Model 1.

When the track-overflow feature is being used or variable-length spanned records are written, the size of a data block or logical record can exceed the capacity of a single track on the direct-access device used.

APPENDIX D: DCB EXIT LIST FORMAT AND CONTENTS

The following shows the format and contents that must be supplied by the problem program when the EXLST operand is specified in a DCB macro instruction. The exit list must begin on a fullword boundary and each entry in the list requires one fullword.

Routine Type	Hexadecimal Code	3-Byte Routine Address—Purpose
Inactive entry	00	Ignored; the entry is not active.
Input header label	01	Process a user input header label.
Output header label	02	Create a user output header label.
Input trailer label	03	Process a user input trailer label.
Output trailer label	04	Create a user output trailer label.
Data control block exit	05	Data control block exit routine.
End-of-volume	06	End-of-volume exit routine.
User totaling	0A	Pointer to user's totaling area.
Block count exit	0B	Block count unequal exit routine.
Defer input trailer label	0C	Defer processing of a user input trailer label from the end-of-data until the CLOSE macro instruction is issued.
Defer nonstandard input trailer label	0D	Defer processing a nonstandard input trailer label on magnetic tape unit from the end-of-data until the CLOSE macro instruction is issued (no exit routine address).
FCB Image	10	Define an FCB image.
DCB ABEND exit	11	Allow analysis of ABEND condition and select one of several options.
QSAM parallel input	12	Address of the PDAB for which this DCB is a member
Last entry	80	Last entry in list. A high-order bit can be specified with any of the above codes but must always be specified with the last entry.

The list can be dynamically shortened during execution by setting the high-order bit of a word to a value of 1. An entry in the list can be made inactive dynamically by setting the high-order byte of the word to a value of hexadecimal 00 or 80.

When control is passed to an exit routine, the general registers contain the following information:

Register	Contents
0	Variable; the contents depend on the exit routine used.
1	The three low-order bytes contain either the address of the DCB currently being processed or, when certain exits are taken, the address of the exit parameter list. These exits are: user-label exits (X'01'-'04'), deferred nonstandard input trailer exit (X'0D'), and DCB ABEND exit (X'11').
2-13	Contents prior to execution of the macro instruction.
14	Return address (must not be altered by the exit routine).
15	Address of the exit routine entry point.

The conventions for saving and restoring registers are as follows:

- The exit routine must preserve the contents of register 14. It need not preserve the contents of other registers. The control program restores registers 2-13 before returning control to the problem program.
- The exit routine must not use the save area whose address is in register 13, because this area is used by the control program. If the exit routine calls another routine or issues supervisor or data management macro instructions, it must provide the address of a new save area in register 13.

For a detailed description of each exit list processing option, refer to *OS/VS Data Management Services Guide*.

APPENDIX E: CONTROL CHARACTERS

Each logical record, in all record formats, can contain an optional control character. This control character is used to control stacker selection on a card punch or card read punch, or it is used to control printer spacing and skipping. If a record containing an optional control character is directed to any other device, it is considered to be the first data byte, and it does not cause a control function to occur.

In format-F and format-U records, the optional control character must be in the first byte of the logical record.

In format-V records, the optional control character must be in the fifth byte of the logical record, immediately following the record descriptor word of the record.

Two control character options are available. A control character option is selected by coding the appropriate character in the RECFM operand of the DCB macro instruction. If either option is specified in the data control block, a control character must be included in each record, and other spacing or stacker selection options also specified in the data control block are ignored.

Machine Code

The record format field in the data control block indicates that the machine code control character has been placed in each logical record. If the record is written, the appropriate byte must contain the command code bit configuration specifying both the write and the desired carriage or stacker select operation.

The machine code control characters for a printer are as follows:

Print and Then Act (Code in Hexadecimal)	Action	Act Immediately—No Printing (Code in Hexadecimal)
01	Print only (no space)	
09	Space 1 line	0B
11	Space 2 lines	13
19	Space 3 lines	1B
89	Skip to channel 1	8B
91	Skip to channel 2	93
99	Skip to channel 3	9B
A1	Skip to channel 4	A3
A9	Skip to channel 5	AB
B1	Skip to channel 6	B3
B9	Skip to channel 7	BB
C1	Skip to channel 8	C3
C9	Skip to channel 9	CB
D1	Skip to channel 10	D3
D9	Skip to channel 11	DB
E1	Skip to channel 12	E3

The machine code control characters for a card read punch device are as follows:

Code in Hexadecimal	Action
01	Select stacker 1
41	Select stacker 2
81	Select stacker 3

Other command codes for specific devices are contained in IBM System Reference Library publications describing the control units or devices.

American National Standards Institute Control Characters

In place of machine code, control characters defined by the American National Standards Institute (ANSI) can be specified. These characters must be represented in EBCDIC code.

American National Standards Institute (ANSI) control characters are as follows:

Code Action Before Printing a Line

b	Space one line (blank code)
0	Space two lines
-	Space three lines
+	Suppress space
1	Skip to channel 1
2	Skip to channel 2
3	Skip to channel 3
4	Skip to channel 4
5	Skip to channel 5
6	Skip to channel 6
7	Skip to channel 7
8	Skip to channel 8
9	Skip to channel 9
A	Skip to channel 10
B	Skip to channel 11
C	Skip to channel 12

Code Action After Punching a Card

V	Select punch pocket 1
W	Select punch pocket 2

These control characters include those defined by ANSI FORTRAN. If any other character is specified, it is interpreted as 'b' or V, depending on the device being used; no error indication is returned.

APPENDIX F: DATA CONTROL BLOCK SYMBOLIC FIELD NAMES

The following describes data control block fields that contain information which defines the data characteristics and device requirements for a data set. Each of the fields described shows the values that result from specifying various options in the DCB macro instruction. These fields can be referred to by the problem program through the use of a DCBD macro instruction which creates a dummy control section (DSECT) for the data control block. Fields that contain addresses are 4 bytes long and are aligned on a fullword boundary. If the problem program inserts an address into a field, the address must be inserted into the low-order 3 bytes of the field without changing the high-order byte.

The contents of some fields in the data control block depend on the device and access method being used. A separate description is provided when the contents of the field are not common to all device types and access methods.

Data Control Block—Common Fields

Offset	Bytes and Alignment	Field Name	Description
26(1A)	1	DCBDSORG	Data set organization. Code IS Indexed sequential. PS Physical sequential. DA Direct organization. ...x xx.. Reserved bits.1. PO Partitioned organization.1 U Unmovable—the data set contains location-dependent information.
40(28)	8	DCBDDNAM	Eight byte name of the data definition statement that defines the data set associated with this DCB. (Before DCB is opened.)
40(28)	2	DCBTIOT	(After DCB is opened.) Offset from the TIOT origin to the TIOELNGH field in the TIOT entry for the DD statement associated with this DCB.
42(2A)	2	DCBMACRF	This field may only be referenced <i>after</i> OPEN. It is common to all uses of the DCB and is created by moving the DCBMACR field into this area.
45(2D)	.3	DCBDEBA	(After DCB is opened.) Address of the associated DEB.
48(30)	1	DCBOFLGS	Flags used by Open routine. ...1 OPEN has completed successfully. 1... Set to 1 by problem program to indicate concatenation of unlike attributes.0. Set to 0 by an I/O support function when that function takes a user exit. It is set to 0 to inhibit other I/O support functions from processing this DCB.1. Set to 1 on return from the user exit to the I/O support function that took the exit.

Offset	Bytes and Alignment	Field Name	Description
50(32)	..2	DCBMACR (Before OPEN)	<p>Macro instruction reference <i>before</i> OPEN. Major macro instructions and various options associated with them. Used by the Open routine to determine access method. Used by the access method executors in conjunction with other parameters to determine which load modules are required. This field is moved to overlay part of DCBDDNAM at Open time and becomes the DCBMACRF field.</p> <p>This field is common to all uses of the DCB, but each access method must be referenced for its meaning.</p>

Data Control Block—BPAM, BSAM, QSAM

Offset	Bytes and Alignment	Field Name	Description
20(14)	1	DCBBUFNO	Number of buffers required for this data set. May range from 0 to a maximum of 255.
21(15)	.3	DCBBUFCB	Address of buffer pool control block.
24(18)	2	DCBBUFL	Length of buffer. May range from 0 to a maximum of 32,760.
32(20)	1	DCBBFALNxx1001	<p>Buffer alignment:</p> <p>D Doubleword boundary. F Fullword not a doubleword boundary, coded in the DCB macro instruction.</p>
32(20)	1	DCBBFTEK .xxx1.00.1110010 x..	<p>Buffering technique:</p> <p>S Simple buffering. E Exchange buffering. A QSAM locate mode processing of spanned records: OPEN is to construct a record area if it automatically constructs buffers.</p> <p>R BSAM create BDAM processing of unblocked spanned records: Software track overflow. OPEN forms a segment work area pool and stores the address of the segment work area control block in DCBECBW. However, WRITE uses a segment work area to write a record as one or more segments.</p> <p>BSAM input processing of unblocked spanned records with keys: Record offset processing. READ reads one record segment into the record area. The first segment of a record is preceded in the record area by the key. Subsequent segments are at an offset equal to the key length.</p> <p>Reserved bit.</p>
33(21)	.3	DCBEODAD	End-of-data address. Address of a user-provided routine to handle end-of-data conditions.

Offset	Bytes and Alignment	Field Name	Description
36(24)	1	DCBRECFM	Record format. Code D Format-D record. F Fixed record length. V Variable record length. U Undefined record length. T Track overflow. B Blocked records. May not occur with undefined (U). S Fixed length record format: Standard blocks. (No truncated blocks or unfilled tracks are embedded in the data set.) Variable length record format: Spanned records. A ANSI control character. M Machine control character. No control character. Key length (KEYLEN) was specified in the DCB macro instruction. This bit is inspected by the Open routine to prevent overriding a specification of KEYLEN=0 by a nonzero specification in the JFCB or data set label.
37(25)	.3	DCBEXLST	Exit list. Address of a user-provided exit list control block.
42(2A)	2	DCBMACRF	Macro instruction reference after OPEN. Contents and meaning are the same as those of the DCBMACR field in the foundation segment before OPEN.
50(32)	..2	DCBMACR (Before OPEN)	Major macro instructions and various options associated with them. Used by the Open routine to determine access method. Used by the access method executors in conjunction with other parameters to determine which load modules are required. Code <i>BSAM—Input</i> Always zero for BSAM. R READ Reserved bits. P POINT (which implies NOTE). C CNTRL
51(33)		Byte 1 00..1.x x..x1..1.	
		Byte 2 00..1. 1..1..1.1	<i>BSAM—Output</i> Always zero for BSAM. W WRITE L Load mode BSAM (create BDAM data set). P POINT (which implies NOTE). C CNTRL BSAM create BDAM processing of unblocked spanned records, with BFTEK=R specified: The user's program has provided a segment work area pool and stored the address of the segment work area control block in DCBEOBW.

Offset	Bytes and Alignment	Field Name	Description
50(32)		Byte 1	<i>QSAM—Input</i>
		0... ..	Always zero for QSAM.
		.1..	G GET
		..0.	Always zero for QSAM.
		...1	M Move mode.
	 1...	L Locate mode.
	1..	T Substitute mode.
	1.	C CNTRL
.... ...1	D Data mode.		
51(33)		Byte 2	<i>QSAM—Output</i>
		0... ..	Always zero for QSAM.
		.1..	P PUT
		..0.	Always zero for QSAM.
		...1	M Move mode.
	 1...	L Locate mode.
	1..	T Substitute mode.
	1.	C CNTRL
.... ...1	D Data mode.		
50(32)		Byte 1	<i>BPAM—Input</i>
		00..	Always zero for BPAM.
		..1.	R READ
	1..	P POINT (which implies NOTE).
...x x.xx	Reserved bits.		
51(33)		Byte 2	<i>BPAM—Output</i>
		00..	A Always zero for BPAM.
		..1.	W WRITE
	1..	P POINT (which implies NOTE).
...x x.xx	Reserved bits.		

Direct-Access Storage Devices Interface

Offset	Bytes and Alignment	Field Name	Description
16(10)	1	DCBKEYLE	Key length of the data set.
17(11)	.1	DCBDEVT	Device type.
		0010 0110	2305 Disk Storage Facility, Model 1.
		0010 0111	2305 Disk Storage Facility, Model 2.
		0010 1000	2314 Disk Storage Facility.
		0010 1001	3330 Disk Storage, Model 1, or Mass Storage System (MSS) virtual volume.
		0010 1101	3330 Disk Storage, Model 11.
		0010 1010	3340 Disk Storage.

Magnetic Tape Interface

Offset	Bytes and Alignment	Field Name	Description
16(10)	1	DCBTRTCH	Tape recording technique for 7-track tape.
		Code	
		0010 0011	E Even parity.
		0011 1011	T BCD/EBCDIC translation.
		0001 0011	C Data conversion.
0010 1011	ET Even parity and translation.		

Offset	Bytes and Alignment	Field Name	Description																		
17(11)	.1	DCBDEVT	Device type.																		
		1000 0001	2400 series magnetic tape unit (7-track or 9-track).																		
18(12)	..1	DCBDEN	Tape density—2400 series magnetic tape units.																		
			<table border="1"> <thead> <tr> <th>Code</th> <th>7-tracks</th> <th>9-tracks</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>200 BPI</td> <td>—</td> </tr> <tr> <td>1</td> <td>556 BPI</td> <td>—</td> </tr> <tr> <td>2</td> <td>800 BPI</td> <td>800 BPI</td> </tr> <tr> <td>3</td> <td>—</td> <td>1600 BPI</td> </tr> <tr> <td>4</td> <td>—</td> <td>6250 BPI</td> </tr> </tbody> </table>	Code	7-tracks	9-tracks	0	200 BPI	—	1	556 BPI	—	2	800 BPI	800 BPI	3	—	1600 BPI	4	—	6250 BPI
Code	7-tracks	9-tracks																			
0	200 BPI	—																			
1	556 BPI	—																			
2	800 BPI	800 BPI																			
3	—	1600 BPI																			
4	—	6250 BPI																			
		0000 0011	0																		
		0100 0011	1																		
		1000 0011	2																		
		1100 0011	3																		
			4																		

Paper Tape Interface

Offset	Bytes and Alignment	Field Name	Description																
16(10)	1	DCBCODE	Paper tape code being used. The appropriate translate table is made available.																
			<table border="1"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>N</td> <td>No conversion</td> </tr> <tr> <td>I</td> <td>IBM BCD</td> </tr> <tr> <td>F</td> <td>Friden</td> </tr> <tr> <td>B</td> <td>Burroughs</td> </tr> <tr> <td>C</td> <td>National Cash Register</td> </tr> <tr> <td>A</td> <td>ASCII (8-track)</td> </tr> <tr> <td>T</td> <td>Teletype¹</td> </tr> </tbody> </table>	Code	Description	N	No conversion	I	IBM BCD	F	Friden	B	Burroughs	C	National Cash Register	A	ASCII (8-track)	T	Teletype ¹
Code	Description																		
N	No conversion																		
I	IBM BCD																		
F	Friden																		
B	Burroughs																		
C	National Cash Register																		
A	ASCII (8-track)																		
T	Teletype ¹																		
		1000 0000	N																
		0100 0000	I																
		0010 0000	F																
		0001 0000	B																
		0000 1000	C																
		0000 0100	A																
		0000 0010	T																
17(11)	.1	DCBDEVT	Device type.																
		0101 0000	2671 Paper Tape Reader.																

Card Reader, Card Punch Interface

Offset	Bytes and Alignment	Field Name	Description														
16(10)	1	DCBMODE,DCBSTACK															
			<table border="1"> <thead> <tr> <th>Code</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>xxxx</td> <td>Mode of operation for 1442 Card Read Punch.</td> </tr> <tr> <td>1000</td> <td>C Column binary mode.</td> </tr> <tr> <td>0100</td> <td>E EBCDIC mode.</td> </tr> <tr> <td>.... xxxx</td> <td>Stacker selection.</td> </tr> <tr> <td>.... 0001</td> <td>1 Stacker 1.</td> </tr> <tr> <td>.... 0010</td> <td>2 Stacker 2.</td> </tr> </tbody> </table>	Code	Description	xxxx	Mode of operation for 1442 Card Read Punch.	1000	C Column binary mode.	0100	E EBCDIC mode. xxxx	Stacker selection. 0001	1 Stacker 1. 0010	2 Stacker 2.
Code	Description																
xxxx	Mode of operation for 1442 Card Read Punch.																
1000	C Column binary mode.																
0100	E EBCDIC mode.																
.... xxxx	Stacker selection.																
.... 0001	1 Stacker 1.																
.... 0010	2 Stacker 2.																
		xxxx	Mode of operation for 1442 Card Read Punch.														
		1000	C Column binary mode.														
		0100	E EBCDIC mode.														
	 xxxx	Stacker selection.														
	 0001	1 Stacker 1.														
	 0010	2 Stacker 2.														
17(11)	.1	DCBDEVT	Device type.														
		0100 0011	1442 Card Read Punch														
		0100 0001	2540 Card Reader														
		0100 0010	2540 Card Punch														
		0100 0100	2501 Card Reader														
		0100 0101	2520 Card Read Punch														
		0100 0110	3505 Card Reader														
		0100 1100	3525 Card Punch														

¹Trademark of Teletype Corporation.

Printer Interface

Offset	Bytes and Alignment	Field Name	Description
16(10)	1	DCBPRTSP	Number indicating normal printer spacing.
			Code
		0000 0001	0 No spacing.
		0000 1001	1 Space one line.
		0001 0001	2 Space two lines.
		0001 1001	3 Space three lines.
17(11)	.2	DCBDEVT	Device type.
		Byte 1	
		0100 1000	1403 Printer
		0100 1001	3211 Printer
		0100 1010	1443 Printer
			Test-for-printer-overflow mask (PRTOV mask). If printer overflow is to be tested for, the PRTOV macro instruction sets the mask as follows:
		Byte 2	Code
		0010 0000	9 Test for channel 9 overflow.
		0001 0000	12 Test for channel 12 overflow.

Access Method Interface

BSAM, BPAM Interface

Offset	Bytes and Alignment	Field Name	Description
52(34)	1	DCBOPTCD	Option codes.
			Code
		1...	W Write-validity check (DASD).
		.1..	U Allow a data check caused by an invalid character. (1403 printer with UCS feature.)
			B Treat EOF and EOJ labels as EOJ labels which allows SL or AL tapes to be read out of order. (Magnetic tape.)
		..1.	C Chained scheduling.
		...1	H Optical Reader: Hopper empty exit. Input Tape Files: Requests the testing for and bypassing of any embedded DOS checkpoint records encountered. (This code can only be specified in a JCL statement.)
	1..	Z Magnetic tape devices: Use reduced error recovery procedure.
	1.	T BSAM only: user totaling.
	 1...	Q An ASCII data set is to be processed.
	x	Reserved bit.
57(39)	.3	DCBSYNAD	Address of user's synchronous error routine to be entered when a permanent error occurs.
62(3E)	..2	DCBBLKSI	Maximum block size. Maximum value: 32,760. For fixed-length blocked record format, it must be a multiple of the length given in DCBLRECL. For variable-length records, this must include the 4 byte block length field.

Offset	Bytes and Alignment	Field Name	Description
72(48)	1	DCBNCP	Number of chained programs. Number of READ or WRITE requests which may be issued prior to a CHECK. Maximum number: 99.
80(50)	1	DCBUSASI/ DCBLBP	ASCII tape. Block prefix. .1. Block prefix is a four-byte field containing the block length.
81(51)	.1	DCBBUFOF	Block prefix length.
82(52)	..2	DCBLRECL	Logical record length. For fixed-length blocked record format, the presence of DCBLRECL allows BSAM to read truncated records. For undefined records, this field contains block size.

QSAM Interface

Offset	Bytes and Alignment	Field Name	Description
52(34)	1	DCBOPTCD	Option codes. Code Q An ASCII data set is to be processed. Same as DCBOPTQ. BSAM only. W Write-validity check (DASD). U Allow a data check for an invalid character (1403 with UCS). B Treat EOF and EOJ labels as EOJ labels which allows SL or AL tapes to be read out of order (magnetic tape). C Chained scheduling using the Program Controlled Interruption. O Online correction. Input Tape Files: Requests the testing for and bypassing of any embedded DOS checkpoint records encountered. (This code can only be specified in a JCL statement.) Z Magnetic tape devices. Use reduced error recovery procedure. T User totaling.
	 1..	
		1..	
		.1.	
		..1.	
		...1	
	1..	
	1.	
57(39)	.3	DCBSYNAD	Address of the user's synchronous error routine to be entered when a permanent error occurs.
62(3E)	..2	DCBBLKSI	Maximum block size. Maximum value: 32,760. For fixed-length blocked record format, it must be a multiple of DCBRECL. For variable-length records this must include the 4-byte block length field provided by the access method.
80(50)	1	DCBUSASI/ DCBLBP	ASCII tape. Block prefix. .1. Block prefix is a four-byte field containing the block length.
81(51)	.1	DCBBUFOF	Block prefix length.

Offset	Bytes and Alignment	Field Name	Description
82(52)	..2	DCBLRECL	Format-F records: Record length. Format-U records: Block size. Format-V records — <ul style="list-style-type: none"> • Unspanned record format — GET: PUTX; record length. PUT: Actual or maximum record length. • Spanned record format — Locate mode — - GET: Segment length. - PUT: Actual or minimum segment length. Logical record interface — - Before OPEN: Maximum logical record length. - After GET: Record length. - Before PUT: Actual or maximum record length. Move mode — - GET: Record length. - PUT: Actual or maximum record length. • Data mode, GET — Data records up to 32,752 bytes: Data length. Data records exceeding 32,752 bytes: - Before OPEN: X'8000' - After OPEN: Data length. • Output mode, PUTX (output data set): Segment length.
84(54)	1	DCBEROPT	Error option. Disposition of permanent errors if the user returns from a synchronous error exit (DCBSYNAD), or if the user has no synchronous error exit. 100. ACC: Accept. 010. SKP: Skip. 001. ABE: Abnormal end of task. ...x xxxx Reserved bits.
85(55)	3	DCBCNTRA	Address of CNTRL module.
88(58)	2		Reserved.
90(5A)	2	DCBPRECL	Block length, maximum block length or data length.
92(5C)	4	DCBEOB	Address of end of block module.

Data Control Block—ISAM

Offset	Bytes and Alignment	Field Name	Description
16(10)	1	DCBKEYLE	Key length.
17(11)	.1	DCBDEVT	Device type.
		0000 0110	2305 Disk Storage Facility, Model 1.
		0000 0111	2305 Disk Storage Facility, Model 2.
		0000 1000	2314 Disk Storage Facility.
		0000 1001	3330 Disk Storage, Model 1, or Mass Storage System (MSS) virtual volume.
		0000 1101	3330 Disk Storage, Model 11.
		0000 1010	3340 Disk Storage.
20(14)	1	DCBBUFNO	Number of buffers required for this data set: 0-255.
21(15)	.3	DCBBUFCB	Address of buffer pool control block.
24(18)	2	DCBBUFL	Length of buffer: 0- 32,760.
32(20)	1	DCBBFALN	
			Code
	xx	Buffer alignment:
	10	D Doubleword boundary.
	01	F Fullword not a doubleword boundary, coded in the DCB macro instruction.
	11	F Fullword not a doubleword boundary, coded in the DD statement.
33(21)	.3	DCBEODAD	Address of a user-provided routine to handle end-of-data conditions.
36(24)	1	DCBRECFM	Record format.
			Code
		10..	F Fixed length records.
		10..	V Variable length records.
		11..	U Undefined length records.
		..1.	T Track overflow.
		...1	B Blocked records. May not occur with undefined (U).
	 1...	S Standard records. No truncated blocks or unfilled tracks are embedded in the data set.
	10.	A ANSI control character.
	01.	M Machine control character.
	00.	No control character.
	1	Key length (KEYLEN) was specified in the DCB macro instruction; this bit is inspected by the Open routine to prevent overriding a specification of KEYLEN=0 by a nonzero specification in the JFCB or data set label.
37(25)	.3	DCBEXLST	Exit list. Address of a user-provided list.
42(2A)	..2	DCBMACRF	Macro instruction reference after OPEN: Contents and meaning are the same as those of the DCBMACR field before OPEN.


Offset	Bytes and Alignment	Field Name	Description
50(32)	..2	DCBMACR	Macro instruction reference before OPEN: specifies the major macro instructions and various options associated with them. Used by the Open routine to determine access method. Used by the access method executors in conjunction with other parameters to determine which load modules are required.
			Code
		Byte 1	BISAM
50(32)		00.0 0...	Always zero for BISAM.
		..1.	R READ
	1..	S Dynamic buffering.
	1.	C CHECK
	x	Reserved bit.
		Byte 2	BISAM
51(33)		00.0 0000	Always zero for BISAM.
		..1.	W WRITE
		Byte 1	QISAM
50(32)		0.0. .0..	Always zero for QISAM.
		.1..	G GET
		...1	M Move mode of GET.
	 1...	L Locate mode for GET.
	xx	Reserved bits.
		Byte 2	QISAM
51(33)		1...	S SETL
		.1..	P PUT or PUTX.
		..0.	Always zero for QISAM.
		...1	M Move mode of PUT.
	 1...	L Locate mode of PUT.
	1..	U Update in place (PUTX).
	1.	K SETL by key.
	1	I SETL by ID.
52(34)	1	DCBOPTCD	Option codes:
			Code
		1...	W Write-validity check.
		.1..	U Full-track index write.
		..1.	M Master indexes.
		...1	I Independent overflow area.
	 1...	Y Cylinder overflow area.
	1.	L Delete option.
	1	R Reorganization criteria.
	x..	Reserved bit.
53(35)	.1	DCBMAC	Extension of the DCBMACRF field for ISAM.
			Code
		xxxx ...x	Reserved bits.
	 1...	U Update for read.
	1..	U Update type of write.
	1.	A Add type of write.
54(36)	..1	DCBNTM	Number of tracks that determines the development of a master index. Maximum permissible value: 99.
55(37)	...1	DCBCYLOF	The number of tracks to be reserved on each prime data cylinder for records that overflow from other tracks on that cylinder. Refer to the section on allocating space for an ISAM data set in <i>OS/VS Data Management Services Guide</i> . to determine how to calculate the maximum number.

Offset	Bytes and Alignment	Field Name	Description
56(38)	4	DCBSYNAD	Address of user's synchronous error routine to be entered when uncorrectable errors are detected in processing data records.
60(3C)	2	DCBRKP	Relative position of the first byte of the key within each logical record. Maximum permissible value: logical record length minus key length.
62(3E)	..2	DCBBLKSI	Block size.
64(40)	4	DCBMSWA	Address of the storage work area reserved for use by the control program when new records are being added to an existing data set.
68(44)	2	DCBSMSI	Number of bytes in area reserved to hold the highest level index.
70(46)	2	DCBSMSW	Number of bytes in work area used by control program when new records are being added to the data set.
72(48)	1	DCBNCP	Number of copies of the READ-WRITE (type K) channel programs that are to be established for this data control block (99 maximum).
73(49)	.3	DCBMSHI	Address of the storage area holding the highest level index.
80(50)	1	DCBEXCD1	First byte in which exceptional conditions detected in processing data records are reported to the user. 1... Lower key limit not found. .1.. Invalid device address for lower limit. ..1. Space not found. ...1 Invalid request. 1... Uncorrectable input error.1.. Uncorrectable output error.1. Block could not be reached (input).1 Block could not be reached (update).
81(51)	.1	DCBEXCD2	Second byte in which exceptional conditions detected in processing data records are reported to the user. 1... Sequence check. .1.. Duplicate record. ..1. DCB closed when error was detected. ...1 Overflow record. 1... PUT: length field of record larger than length indicated in DCBLRECL.xxx Reserved bits.
82(52)	..2	DCBLRECL	Logical record length for fixed-length record formats. Variable-length record formats: maximum logical record length or an actual logical record length changed dynamically by the user when creating the data set.
197(C5)	.1	DCBOVDEV	Device type for independent overflow. 0010 0110 2305 Disk Storage Facility, Model 1. 0010 0111 2305 Disk Storage Facility, Model 2. 0010 1000 2314 Disk Storage Facility. 0010 1001 3330 Disk Storage, Model 1, or Mass Storage System (MSS) virtual volume. 0010 1101 3330 Disk Storage, Model 11. 0010 1010 3340 Disk Storage.

Data Control Block—BDAM

Offset	Bytes and Alignment	Field Name	Description
16(10)	1	DCBKEYLE	Key length.
17(11)	.3	DCBREL	Number of relative tracks or blocks in this data set.
20(14)	1	DCBBUFNO	Number of buffers required for this data set. May range from 0 to 255.
21(15)	.3	DCBBUFCB	Address of buffer pool control block or of dynamic buffer pool control block.
24(18)	2	DCBBUFL	Length of buffer. May range from 0 to 32,760.
32(20)	1	DCBBFALN	<p>Buffer alignment:</p> <p>.... ..xx 10 01 11 .x.x x...</p> <p>Doubleword boundary. Fullword not a doubleword boundary, coded in the DCB macro instruction. Fullword not a doubleword boundary, coded in the DD statement. Reserved bits.</p>
32(20)	1	DCBBFTEK	<p>.... ..x ..1.</p> <p>Buffering technique. R Unblocked spanned records: Software track overflow. OPEN forms a segment work area pool. The number of segment work areas is determined by DCBBUFNO (OPEN stores the address of the segment work area control block in DCBDYNB) if dynamic buffering is not used or in the dynamic buffer pool control block (see DCBBUFCB) if dynamic buffering is used. WRITE uses a segment work area to write a record as one or more segments. READ uses a segment work area to read a record that was written as one or more segments.</p>
36(24)	1	DCBRECFM	<p>Record format.</p> <p>Code</p> <p>10.. F Fixed record length. 01.. V Variable record length. 11.. U Undefined record length. ..1. T Track overflow. ...1 B Blocked (allowed only with V). 1... S Spanned (allowed only with V). 00. Always zeros. 1 Key length (KEYLEN) was specified in the DCB macro instruction. This bit is inspected by the Open routine to prevent overriding a specification of KEYLEN=0 by a nonzero specification in the JFCB or data set label.</p>

Offset	Bytes and Alignment	Field Name	Description
37(25)	.3	DCBEXLST	Exit list. Address of a user-provided exit list control block.
42(2A)	..2	DCBMACRF	Macro instruction reference after OPEN. Contents and meaning are the same as DCBMACR before OPEN.
50(32)	..2	DCBMACR	Macro instruction reference before OPEN; major macro instructions and various options associated with them that will be used.
50(32)		Byte 1	Code
		00..	Always zero for BDAM.
		..1.	R READ
		...1	K Key segment with READ.
	 1...	I ID argument with READ.
	1..	S System provides area for READ (dynamic buffering).
	1.	X Read exclusive.
	1	C CHECK macro instruction.
		Byte 2	Code
		00..	Always zero for BDAM.
..1.	W WRITE		
...1	K Key segment with WRITE.		
.... 1...	I ID argument with WRITE.		
.... .x..	Reserved bit.		
.... ..1.	A Add type of WRITE.		
.... ...1	Unblocked spanned records, with BFTEK=R specified and no dynamic buffering: The user's program has provided a segment work area pool and stored the address of the segment work area control block in DCBDYNB.		
52(34)	1	DCBOPTCD	Option codes:
52(34)			Code
		1...	W Write-validity check.
		.1..	Track overflow.
		..1.	E Extended search.
		...1	F Feedback.
	 1...	A Actual addressing.
	1..	Dynamic buffering.
	1.	Read exclusive.
	1	R Relative block addressing.
		56(38)	4
62(3E)	..2	DCBBLKSI	Maximum block size.
81(51)	.3	DCBLIMCT	Number of tracks or number of relative blocks to be searched (extended search option).



APPENDIX G: EVENT CONTROL BLOCK

The event control block is used for communications between the various components of the system and between problem programs and the system. An event control block is the subject of WAIT and POST macro instructions. The following illustration shows the format of the event control block; a description of its fields follows the illustration.



Offset	Bytes and Alignment	Code	Bit	Hex. Dig.	Description
0	1	10xx	xxxx	80	W—Waiting for completion of an <i>event</i> .
		01xx	xxxx	40	C—The <i>event</i> has completed.
					One of the following completion codes will appear at the completion of a <i>channel program</i> :
					Access Methods Other Than BTAM
		0111	1111	7F	Channel program has terminated without error. (CSW contents useful.)
		0100	0001	41	Channel program has terminated with permanent error. (CSW contents useful.)
		0100	0010	42	Channel program has terminated because a direct access extent address has been violated. (CSW contents do not apply.)
		0100	0011	43	I/O ABEND condition occurred while loading the error recovery routine . (CSW contents do not apply.)
		0100	0100	44	Channel program has been intercepted because of permanent error associated with device end for previous request. You may reissue the intercepted request. (CSW contents do not apply.)
		0100	1000	48	Request element for channel program has been made available after it has been purged. (CSW contents do not apply.)
		0100	1011	4B	One of the following errors occurred during tape error recovery processing. <ul style="list-style-type: none"> • The CSW command address in the IOB was zeros. • An unexpected load point was encountered. (CSW contents do not apply in either case.)
		0100	1111	4F	Error recovery routines have been entered because of direct access error but are unable to read home addresses or record 0. (CSW contents do not apply.)
		0101	0000	50	Channel program terminated with error. Input block was a DOS-embedded checkpoint record. (CSW contents do not apply.)

APPENDIX H: PDABD SYMBOLIC FIELD NAMES

The following describes PDABD fields of the dummy control section generated by the PDABD macro instruction. Included are the names, attributes, and descriptions of the dummy control section. The use of any of the symbolic names provided by the dummy section should be preceded by a USING instruction specifying IHAPDAB and a dummy section base register containing the address of the actual parallel data access block.

	PDABD			
IHAPDAB	DSECT			
PDANODCB	DS	H		number of DCB addresses in list
PDAMAXCB	DS	H		maximum number of addresses allowed
PDAGRTNA	DS	A		address of parallel GET routine
PDADCBAI	DS	F		DCB address increment
PDADCBLA	DS	A		address of last DCB entry
PDADCBEP	DS	A		address of DCB entry last processed
PDAECBIX	DS	F		index to ECB list
PDADCBAL	EQU	*		start of DCB list

INDEX

For additional information about any subject listed in this index, refer to the publications that are listed under the same subject in either *OS/VS1 Master Index*, GC24-5104, or *OS/VS2 Master Index*, GC28-0693.

A

A-type address constant defined 21
ABEND exit, DCB macro
 BDAM 65
 BISAM 71
 BPAM 78
 BSAM 94
 list format 247-248
 QISAM 104-105
 QSAM 123
absexp defined 21
absolute expression defined 21
access methods
 general description
 BDAM 61
 BISAM 69
 BPAM 75
 BSAM 83
 QISAM 101
 QSAM 111
 macro instructions used with 243
ACSMETH operand, SYNADAF macro 210
actual device addressing (BDAM) 61,67
adding data to a data set
 BDAM 66,219-220,225
 BISAM 71,221-222
 BPAM 223-224
 BSAM 223-224,225-226
 QISAM 171
 QSAM 173-174
address constant, A-type
 defined 21
address feedback
 current block position 177,220
 next block position 177,220
address of buffers
 obtained from a pool 149
 returned to a pool 137
addressing, types of (BDAM) 61,67
aids, coding 17-19
alias names in a directory 205-206
alignment of buffers
 BDAM 62
 BISAM 70
 BPAM 76
 BSAM 85
 QISAM 102
 QSAM 113
American National Standards Institute
(ANSI) control characters
 BPAM 80
 BSAM 98
 defined 250
 QSAM 126
ANSI
 (see American National Standards Institute)

argument, search
 BDAM 66
 QISAM 106
ASCII data sets
 block prefix
 BSAM 87
 QSAM 116
 restriction 87,116
 block size
 BSAM 86
 QSAM 115
 buffer length
 BSAM 87
 QSAM 115
 on paper tape
 BSAM 90
 QSAM 118
 restriction on record format
 BSAM 98
 QSAM 126
ASCII translation routines
 Check routine 39
 DCB option
 BSAM 96
 QSAM 125
 Get routine 145
 Put routine 173
 Write routine 223
 XLATE macro instruction 233
associated data sets
 closing 49
 opening 155
 types of
 BSAM 92-93
 QSAM 120-121
ATTACH macro, relationship with BLDL macro 27
automatic buffer pool construction
 BDAM 61
 BISAM 69
 BPAM 75
 BSAM 83
 QISAM 101
 QSAM 111
automatic checkpoint restart 41
automatic volume switching (FEOV macro) 133

B

backspacing
 BSP macro 29
 CNTRL macro 57,58
backward read
 open option 156
 read operation 183
base registers for
 dummy sections 129
 macro instructions 22
BCD 8-track paper tape code
 BSAM 90
 QSAM 118

BDAM (basic direct access method)
 general description 61
 macro instructions used with 243
 symbolic field names in DCB 262-263

BFALN operand (DCB macro)
 BDAM 62
 BISAM 70
 BPAM 76
 BSAM 85
 QISAM 102
 QSAM 113

BFTEK operand (DCB macro)
 BDAM 62-63
 BSAM 85-86
 QSAM 114

BISAM (basic indexed sequential access method)
 general description 69
 macro instructions used with 243
 symbolic field names in DCB 259-261

BLDL macro instruction
 description 27-28
 reason codes 28
 return codes 28
 used with FIND 135

BLKSIZE operand (DCB macro)
 BDAM 63
 BPAM 76-77
 BSAM 86
 QISAM 102-103
 QSAM 114-115

block
 backspacing by 29
 count exit
 BSAM 94
 list format 247
 QSAM 123
 data control 61-127
 data event control 235
 descriptor word, relationship with
 BLKSIZE operand 77,86,103
 BUFOFF operand 87,116
 LRECL operand 95,105
 event control 236,265
 position feedback 177-179,219-220
 positioning with POINT 167-168
 prefix
 (see also BUFOFF operand)
 effect on buffer length 87,115
 effect on data alignment 85,113
 reading 177-185
 size
 (see BLKSIZE operand)
 writing 219-226

block size for SYSOUT data sets
 (see also BLKSIZE operand)
 BSAM 86
 QSAM 114

blocking
 data checks (UCS printer) 198
 records
 BDAM 61,68
 BPAM 75,80
 BSAM 83,98
 QISAM 101,108
 QSAM 111,126

boundary alignment
 (see BFALN operand)

BPAM (basic partitioned access method)
 general description 75
 macro instructions used with 243
 symbolic field names for DCB 252-257

BSAM (basic sequential access method)
 general description 83
 macro instructions used with 243
 symbolic field names for DCB 252-257

BSP macro instruction
 description 29
 reason codes 29
 return codes 29

BUFCB operand (DCB macro)
 BDAM 63
 BISAM 70
 BPAM 77
 BSAM 86-87
 QISAM 103
 QSAM 115
 relationship to
 GETBUF macro 149
 GETPOOL macro 151

buffer
 alignment
 (see BFALN operand)
 control
 automatic 143-147,171-174
 dynamic 139
 using FREEBUF macro 137
 using FREEDBUF macro 139
 using GETBUF macro 149
 using RELSE macro 193
 forms control
 using SETPRT macro 197
 length
 (see also BUFL operand)
 BUILD macro 31-32
 BUILDRCD macro 33-34
 for card image mode 87,115
 for ASCII data sets 87,115
 GETPOOL macro 151-152
 message format (SYNADAF macro) 212
 pool construction
 (see also BUFCB operand)
 automatic
 (see BUFNO operand)
 using BUILD macro 31
 using BUILDRCD macro 33
 using GETPOOL macro 151
 releasing of
 using FREEBUF macro 137
 using FREEDBUF macro 139
 using FREEPOOL macro 141
 using RELSE macro 193
 using SYNADRLS macro 213
 specifying number (see BUFNO operand)

buffering, types of
 automatic 143-147,171-174
 dynamic 139
 exchange 114

- buffering, types of (continued)
 - problem program controlled
 - BDAM 64
 - BISAM 70-71
 - BPAM 77
 - BSAM 87
 - simple 114
 - variable-length spanned record
 - BDAM 64
 - QSAM 114
 - using BUILDRCD macro 33
- BUFL operand (DCB macro)
 - BDAM 63-64
 - BISAM 70
 - BPAM 77
 - BSAM 87
 - QISAM 103
 - QSAM 115
- BUFNO operand (DCB macro)
 - BDAM 64
 - BISAM 70-71
 - BPAM 77
 - BSAM 87
 - QISAM 103-104
 - QSAM 115-116
 - relationship to NCP operand 72
- BUFOFF operand (DCB macro)
 - BSAM 87-88
 - QSAM 116
- BUILD macro instruction
 - description 31-32
 - relationship to
 - BFALN operand 62
 - BUFCB operand 63
 - BUFL operand 64
 - BUFNO operand 64
- BUILDRCD macro instruction
 - description
 - execute form 37
 - list form 35
 - standard form 33-34
 - relationship to
 - buffer length
 - (see BUFL operand)
 - GET macro 146
 - number of buffers
 - (see BUFNO operand)
 - PUT macro 174
 - TRUNC macro 215
- Burroughs 7-track paper tape code
 - BSAM 90
 - QSAM 118

C

- CANCEL operand, CHKPT macro 42
- capacity record (R0)
 - relationship with
 - READ macro 178,179
 - WRITE macro 219,225,226
- card
 - code
 - BSAM 91
 - QSAM 119
 - image mode
 - buffer length required 87,115
 - defined 91,119
 - punch 91,119
 - reader 91,119
- carriage
 - control channel
 - CNTRL macro 57-59
 - PRTOV macro 169-170
 - control characters
 - ANSI 250
 - CNTRL macro 57-59
 - machine 249-250
 - PRTOV macro 169-170
- chained scheduling option
 - BPAM 80
 - BSAM 96
 - QSAM 124
- changing partitioned data set member name 205-207
- channel
 - carriage control
 - (see carriage control channel)
 - overflow 169-170
 - programs, number of
 - BISAM 72
 - BPAM 79
 - BSAM 96
- CHECK macro instruction
 - description 39
 - relationship to
 - end of data (EODAD) 78,94
 - MACRF operand 66
 - number of read and write operations (NCP) 72,79,96
 - POINT macro 168
 - READ macro 177,181,183,185
 - WRITE macro 219,221,223,225
 - return of exception codes 236
- checking, write-validity
 - BDAM 67
 - BPAM 80
 - BSAM 97
 - QISAM 107
 - QSAM 125
- checkpoint data set 41
- checkpoint records, embedded (DOS)
 - CNTRL macro 57
 - POINT macro 167
- CHKPT macro instruction
 - execute form 47
 - list form 45
 - return codes 43
 - standard form 41-43
- CLOSE macro instruction
 - execute form 55
 - list form 53
 - relationship to
 - BUILDRCD macro 34
 - FREPOOL macro 141
 - POINT macro 167
 - PUT macro 171,174
 - SETL macro 195
 - standard form 49-51
 - TYPE=T (BSAM) 50-51

- CNTRL macro instruction
 - description 57-59
 - restriction on use 29,57
 - specified in MACRF operand (DCB macro)
 - BSAM 95
 - QSAM 123
- code
 - card
 - BSAM 91
 - QSAM 119
 - completion
 - (see code, return)
 - control character
 - (see control characters)
 - conversion
 - ASCII to EBCDIC 39,145,233
 - EBCDIC to ASCII 223,233
 - paper tape 90,118
 - XLATE macro 233
 - exception 235-239
 - return
 - BLDL macro 28
 - BSP macro 29
 - CHKPT macro 43
 - FIND macro 136
 - RELEX macro 191
 - SETPRT macro 199
 - STOW macro 207
 - SYNADAF macro 211
 - SYNADRLS macro 213
 - WRITE macro 227
- CODE operand (DCB macro)
 - BSAM 90
 - QSAM 118
- coding
 - aids 17-19
 - macro instructions 20-22
 - registers as operands 21
- column, binary
 - (see card image mode)
- eliminate mode, read
 - BSAM 91,92
 - QSAM 119,120
- completion codes
 - BLDL macro 28
 - BSP macro 29
 - CHKPT macro 43
 - FIND macro 136
 - RELEX macro 191
 - SETPRT macro 199
 - STOW macro 207
 - SYNADAF macro 211
 - SYNADRLS macro 213
 - WRITE macro 227
- completion testing of I/O operations 39,217-218
- concatenation
 - input data sets (BPAM) 75
- condition, exception 235-239
- construct
 - a buffer pool
 - (see buffer pool construction)
 - a data control block
 - (see DCB macro instruction)
 - a DECB (data event control block) 235

- contents of registers on entry to
 - exit list 247
 - SYNAD 240-241
- control
 - characters 249-250
 - I/O device 57-59,169-170
 - page format 169-170
 - releasing
 - buffer (FREEBUF macro) 137
 - buffer pool (FREEPOOL macro) 141
 - data block 191
 - dynamically acquired buffer 139,220
 - QSAM buffer (RELSE macro) 193
 - requesting
 - buffer (GETBUF macro) 149
 - buffer pool (GETPOOL macro) 151-152
 - data block 177,181,183,185
- control block
 - buffer pool
 - (see BUFCB operand)
 - data
 - (see DCB macro instruction)
 - data event 235
 - event 265
- control characters
 - ANSI 250
 - CNTRL macro 57-59
 - machine 249-250
 - PRTOV macro 169-170
 - specifying for
 - BPAM 80
 - BSAM 98
 - QSAM 126
- control section (CSECT)
 - (see DCB macro instruction)
- count exit, block
 - BSAM 94
 - format list 247
 - QSAM 123
- cylinder
 - index 106
 - overflow area 104
- CYLOFL operand 104

D

- D-format records
 - BSAM 98
 - QSAM 126
- data, end of
 - (see EODAD operand)
- data block
 - exclusive control of 177
 - locating with POINT macro 167-168
 - release of exclusive control 191
 - retrieval 143-147,177-185
 - writing 171-175,219-227
- data checks
 - blocking and unblocking 97,125,198
 - restriction with CNTRL macro 57-59
- data control block
 - completing 155
 - construction
 - (see DCB macro instruction)
 - DCBBLKCT field 58
 - DCBEXCD1 field 235

data control block (continued)
 DCBEXCD2 field 235
 DCBLRECL field 173
 DCBNCRHI field 72
 DCBOFLGS field 157,158
 description
 (see DCB macro instruction)
 dummy section for 129-130
 exit list
 (see EXLST operand)
 special options with BLDL macro 27-28
 symbolic references to 251-263
 data definition statement
 (see DD statement)
 data event control block
 construction 187,229
 description 235
 exception code 235-239
 modifying with execute form 189,231
 requirement with CHECK macro 39
 requirement with FREEDBUF macro 139
 data management parameter list 53,159
 data mode
 GET macro 124,146
 PUT macro 124,174
 data protection image (DPI)
 BSAM 91,93
 QSAM 119,121
 data set
 block size for SYSOUT 86,114
 closing 49-51
 connecting to 155-158
 disconnecting from 49-51
 disposition at close 50
 opening 155-158
 organization
 (see DSORG operand)
 temporary closing 50-51
 types
 (see access methods)
 data translation
 (see code conversion)
 data transmittal modes
 data 146,174
 locate 143,146,171,173-174
 move 143,146,171,174
 specified in DCB 106,124
 substitute 146,174
 DCB ABEND exit
 BDAM 65
 BISAM 71
 BPAM 78
 BSAM 94
 list format 247
 QISAM 104-105
 QSAM 123
 DCB macro instruction
 BDAM 61-68
 BISAM 69-73
 BPAM 75-81
 BSAM 83-99
 QISAM 101-109
 QSAM 111-127
 DCB operands
 description
 (see DCB macro instruction)
 symbolic names for 251-263
 DCBD macro instruction
 description 129-130
 DD statement, relationship to
 data control block
 (see DDNAME operand)
 NOTE macro 153
 OPEN macro 155-158
 POINT macro 167-168
 DDNAME operand (DCB macro)
 BDAM 64
 BISAM 71
 BPAM 77-78
 BSAM 88
 QISAM 104
 QSAM 116
 DEB validity checking 155
 deblocking records
 BDAM 61,68
 BPAM 75,80
 BSAM 83,98
 QISAM 101,108
 QSAM 111,126
 DECB
 (see data event control block)
 deferred checkpoint restart 41
 delete option
 description 107
 DEN operand (DCB macro)
 BSAM 89
 QSAM 117
 density, recording
 (see DEN operand)
 descriptor word
 block
 BPAM 77
 BSAM 86,87,95
 QISAM 103,105
 QSAM 116
 record
 BSAM 87,95
 QISAM 103,105
 QSAM 123
 segment 86,185
 DEVD operand (DCB macro)
 BSAM 88-93
 DCBD macro 130
 QSAM 116-121
 device addressing, types of (BDAM) 67
 device capacities 245-246
 device types in a dummy section 130
 direct-access storage device
 capacity 245-246
 considerations with
 BSP macro 29
 CHKPT macro 41
 CLOSE macro 49,50
 POINT macro 167-168
 interface in DCB 254
 direct data set
 (see BDAM)
 direct search option
 BSAM 97
 QSAM 125

- directory, partitioned data set
 - creation 75
 - obtaining contents with BLDL 27-28
 - operations performed by STOW macro 205-207
 - search by FIND macro 135-136
- DISP option
 - (see disposition option)
- disposition option
 - CLOSE macro 50
 - OPEN macro 156-157
 - requirement for extending an
 - ISAM data set 171
- DOS embedded checkpoint records, relationship with
 - CNTRL macro 57
 - POINT macro 167
 - DOS/OS interchange feature, specifying 97,125
- doubleword alignment
 - (see BFALN operand)
- DPI (data protection image), specifying
 - for BSAM 91,93
 - for QSAM 119,121
- DSECT for
 - DCB symbolic names 251
- DSORG operand
 - CHECK macro 39
 - DCB macro
 - BDAM 64-65
 - BISAM 71
 - BPAM 78
 - BSAM 94
 - DCBD macro 129-130
 - QISAM 104
 - QSAM 122
- dummy control section
 - DCBD macro 129-130
 - how used 251
- dummy data block (BDAM) 225-226
- dummy key 226
- dynamic buffering
 - effect on buffer length 63,70
 - effect on number of channel programs 72
 - requesting in READ macro 178,181
 - requesting in WRITE macro 220,221
 - returning buffer to the pool 139,220
 - specified in BDAM DCB 66
 - specified in BISAM DCB 71

E

- EBCDIC
 - (see extended binary coded decimal interchange code)
- ECB
 - (see also event control block)
 - operand, WAIT macro 217
- ECBLIST operand, WAIT macro 217
- eliminate mode, read column
 - BSAM 91,92
 - QSAM 119,120
- embedded checkpoint records (DOS)
 - CNTRL macro 57
 - POINT macro 167
- end of data
 - (see EODAD operand)
- end of file on magnetic tape, ignoring
 - BSAM 97

- QSAM 125
- end of sequential retrieval 131
- end of volume
 - exit
 - BSAM 94
 - QSAM 123
 - forced 133
- entry to
 - exit routine 247
 - SYNAD routine 240-241
- EODAD operand (DCB macro)
 - BPAM 78
 - BSAM 94
 - QISAM 104
 - QSAM 122
- EODAD routine
 - BSP macro 29
 - CHECK macro 39
 - FEOV macro 133
 - GET macro 143,147
 - POINT macro 167
- EROPT operand (DCB macro) 122
- ERP (error recovery procedure for tape)
 - BSAM 97
 - QSAM 125
- error analysis, I/O
 - exception codes
 - BDAM 239
 - BISAM 236
 - QISAM 237
 - register contents
 - BDAM 241
 - BISAM 240
 - BPAM 241
 - BSAM 241
 - QISAM 240
 - QSAM 241
 - relationship with
 - CHECK macro 39
 - CNTRL macro 59
 - DCB macro 97,125
 - GET macro 143,147
 - POINT macro 168
 - PUT macro 172,174
 - PUTX macro 175
 - SETL macro 196
 - SYNADAF macro 209
 - specifying in DCB macro
 - BDAM 68
 - BISAM 73
 - BPAM 81
 - BSAM 99
 - QISAM 109
 - QSAM 127
 - status indicators
 - BDAM 235,242
 - BISAM 235
 - BPAM 235,242
 - BSAM 235,242
 - QISAM 235
 - QSAM 235,242
- error codes
 - (see return codes)
- error conditions while opening a data set 157-158

- error exits
 - CHECK macro 39
 - CNTRL macro 59
 - DCB macro 97,125
 - GET macro 147
 - POINT macro 168
 - PUT macro 172,174
 - PUTX macro 175
 - SETL macro 196
 - SYNADAF macro 209
- error option operand (QSAM) 122
- error recovery procedure for tape 97,125
- error tape, reading 97,125
- ESETL macro instruction
 - description 131
 - relationship to
 - GET macro 143
 - SETL macro 195
- event control block 235,265
- exception code 235-239
- exchange buffering
 - buffer alignment for 113
 - restrictions
 - for VS2 systems 114
 - record format 114
 - track-overflow feature 114,126
 - specified in DCB 114
- exclusive control of data block (BDAM)
 - releasing of 191
 - requesting of 177
 - specified in DCB 67
- EXCP macro, relationship with SYNADAF macro 209
- EXCP programming, restriction 197,199
- execute form instructions
 - BUILDRCD macro 37
 - CHKPT macro 47
 - CLOSE macro 55
 - OPEN macro 161
 - READ macro 189
 - SETPRT macro 203
 - WRITE macro 231
- exit
 - (see also EXLST operand)
 - block count 94,123
 - data control block
 - (see EXLST operand)
 - end of data
 - (see EODAD operand)
 - end of volume 94,123
 - error analysis
 - (see error analysis, I/O)
 - FCB image 94,123
 - list format 247
 - user labeling 94,123
 - user totaling 94,123
- EXLST operand (DCB macro)
 - BDAM 65
 - BISAM 71
 - BPAM 78
 - BSAM 94
 - list format 247
 - QISAM 104-105
 - QSAM 123
- expression
 - absolute (absexp) 21
 - relocatable (relexp) 21

- extended binary coded decimal interchange code (EBCDIC)
 - ASCII translation
 - Check routine 39
 - DCB option 96,125
 - GET routine 145
 - Put routine 173
 - Write routine 223
 - XLATE macro 233
 - paper tape translation
 - BSAM 90
 - QSAM 118
- extended search option
 - LIMCT operand 65
 - OPTCD operand 67

F

- F-format records
 - (see RECFM operand)
- FCB
 - image, defining 94,123
 - operand (SETPRT macro) 198
- feedback
 - block position 177-179,219-220
 - next address 178,226
- FEOV macro instruction 133
- file, end of
 - (see end of file)
- FIND macro instruction
 - description 135-136
 - reason codes 136
 - return codes 136
- fixed-length records
 - (see BLKSIZE operand; RECFM operand)
- format
 - exit list 247
 - page 169-170
 - record
 - BDAM 68
 - BPAM 80
 - BSAM 98-99
 - QISAM 108
 - QSAM 126-127
- forms alignment 198
- forms control buffer (FCB)
 - image, defining 94,123
 - operand (SETPRT macro) 198
- forward space 58
- FREE option with CLOSE macro 50
- FREEBUF macro instruction
 - description 137
 - relationship to
 - BUILD macro 31
 - GETBUF macro 149
- FREEDBUF macro instruction
 - description 139
 - used with BISAM 71,221
- FREEPOOL macro instruction
 - description 141
 - relationship to
 - CLOSE macro 49,141
 - GETPOOL macro 141,152
- Friden 8-track paper tape code
 - BSAM 90
 - QSAM 118
- full-track-index write operation 107

fullword boundary alignment
(see BFALN operand)
FUNC operand (DCB macro)
 BSAM 91-92,93
 QSAM 119-120,121

G

GET macro instruction
 ASCII translation 145
 data mode (QSAM) 124,146
 for
 QISAM 143
 QSAM 145-146
 locate mode
 QISAM 106,143
 QSAM 124,146
 move mode
 QISAM 106,143
 QSAM 124,146
 restriction when using CNTRL macro 57
 restriction when using paper tape 124
 relationship to
 CNTRL macro 57
 EODAD
 (see EODAD operand)
 PDAB macro 163
 RELSE macro 193
 SETL macro 195
 specified in DCB macro
 QISAM 106
 QSAM 124
 substitute mode (QSAM) 124,146
 TYPE=P 145,146
Get routine exits 143,147
GETBUF macro instruction
 description 149
 relationship to
 BUILD macro 31
 FREEBUF macro 137
GETPOOL macro instruction
 description 151-152
 relationship to
 BFALN operand 62
 BUFCB operand 63
 BUFL operand 64
 BUFNO operand 64
 FREEPOOL macro 141,152

I

IBM BCD perforated tape
 BSAM 90
 QSAM 118
IHADCB dummy section 129
IHAPDAB dummy section 165
image
 FCB (forms control buffer) 94,123,197
 UCS (universal character set) 197-198
image, data protection
 BSAM 91,93
 QSAM 119,121
image mode, card
 BSAM 91
 QSAM 119
independent overflow area, specifying 107

index
 cylinder 106
 highest level
 address of 72
 size of 72
 master
 number of tracks per level 106
 specified in OPTCD operand (DCB macro) 107
 space allocation for 101
 indicators, status 235-240
 INOUT open option 156
 input data sets
 closing 49-51
 opening 155-158
 READ or GET specified in DCB
 BDAM 66-67
 BISAM 71-72
 BPAM 79
 BSAM 95-96
 QISAM 106
 QSAM 123-124
 reading
 BDAM 177-179
 BISAM 181-182
 BPAM 183-184
 BSAM (read a direct data set) 185
 BSAM (read a sequential data set) 183-184
 QISAM 143
 QSAM 145-147
 testing completion of I/O operations
 CHECK 39
 WAIT 217-218
 INPUT open option 156
 input/output devices
 card reader and card punch 57
 control of 57-59
 magnetic tape 57
 printer
 CNTRL macro 57-59
 PRTOV macro 169-270
 2540 card punch 115
 3525 card punch 49,57,58,115
 input/output error analysis
 (see SYNAD routine)
 input/output operation
 completion of 39,217-218
 status indicators 235-242
 synchronizing I/O 39,217-218
 interface, DCB
 for BPAM 256-257
 for BSAM 256-257
 for card reader, card punch 255
 for direct-access devices 254
 for magnetic tape 254-255
 for paper tape 255
 for printer 256
 for QSAM 257-258
 interface, logical record
 invoked by BUILDRCDD macro 33-34
 provided by QSAM 111,114
 specifying in DCB macro (BFTEK) 114
 used with GET macro 146
 used with PUT macro 174

ISAM

- general description 69,101
- macro instructions used with 243
- symbolic field names in DCB 259-261

J

job control language

- DD statement, relationship to
 - CHKPT macro 41
 - CLOSE macro 49
 - data control block
 - (see DDNAME operand)
 - GET macro 145
 - NOTE macro 153
 - OPEN macro 155
 - POINT macro 167
 - PUT macro 171,173
- LABEL parameter to request ASCII translation 39,145,173
- job step checkpoint restart 41

K

key, (BDAM)

- dummy 226
- specified in DCB macro 65
- writing 219,225

key length

- (see KEYLEN operand)

key position, relative (RKP) 108

key, record

- PUT macro 171
- READ macro 181-182
- RKP operand (DCB macro) 108
- SETL macro 195-196
- WRITE macro 221-222

KEYLEN operand (DCB macro)

- BDAM 65
- BPAM 78-79
- BSAM 94
- QISAM 105

L

label

- (see also EXLST operand)

- exit list format 247
- input data set 125,133,155
- output data set
 - CLOSE macro 49
 - FEOV macro 133
 - OPEN macro 155
- user, processing 94,123

LABEL parameter in DD statement 39,145,173

LEAVE option

- CLOSE macro 49
- FEOV macro 133
- OPEN macro 156

length

- buffer
 - (see BUFL operand)

- record
 - (see LRECL operand)

levels of master index (ISAM) 106

LIMCT operand (DCB macro) 65-66

line spacing, printer

- CNTRL macro 57-59
- PRTSP operand (DCB macro)
 - BSAM 90
 - QSAM 118

LINK macro, relationship with BLDL macro 27

list address, data management 55,161

list form instructions

- BUILDRCD macro 35
- CHKPT macro 45
- CLOSE macro 53
- OPEN macro 159
- READ macro 187
- SETPRT macro 201
- WRITE macro 229

list format, exit 247

LOAD macro, relationship with BLDL macro 27

load mode (QISAM) 101

loading

- forms control buffer (FCB) 198
- universal character set buffer (UCS) 197

locate mode

- GET macro
 - QISAM 143
 - QSAM 146
- PUT macro
 - QISAM 171
 - QSAM 173-174
- specified in DCB macro
 - QISAM 106
 - QSAM 124

logical record length for

- (see also LRECL operand)
 - GET macro 145
 - PUT macro 171,173
 - PUTX macro 175

LONG operand, WAIT macro 218

lower limit of sequential retrieval (SETL macro) 195-196

LRECL operand (DCB macro)

- BPAM 79
- BSAM 95
- QISAM 105
- QSAM 123

M

machine control characters

- BPAM 80
- BSAM 98
- description 249-250
- QSAM 126

MACRF operand (DCB macro)

- BDAM 66-67
- BISAM 71-72
- BPAM 79
- BSAM 95-96
- QISAM 106
- QSAM 123-124

macros, data management

BLDL 27-28
BSP 29
BUILD 31-32
BUILDRCD
 execute form 37
 list form 35
 standard form 33-34
CHECK 39
CHKPT
 execute form 47
 list form 45
 standard form 41-43
CLOSE
 execute form 55
 list form 53
 standard form 49-51
CNTRL 57-59
DCB for
 BDAM 61-68
 BISAM 69-73
 BPAM 75-81
 BSAM 83-99
 QISAM 101-109
 QSAM 111-127
DCBD 129-130
ESETL 131
FEOV 133
FIND 135-136
FREEBUF 137
FREEDBUF 139
FREEPOOL 141
GET for
 QISAM 143
 QSAM 145-147
GETBUF 149
GETPOOL 151-152
NOTE 153
OPEN
 execute form 161
 list form 159
 standard form 155-158
PDAB 163
PDABD 165
POINT 167-168
PRTOV 169-170
PUT for
 QISAM 171-172
 QSAM 173-174
PUTX 175
READ for
 BDAM 177-179,185
 BISAM 181-182
 BPAM 183-184
 BSAM 183-184,185
 execute form 189
 list form 187
RELEX 191
RELSE 193
SETL 195-196
SETPRT
 execute form 203
 list form 201
 standard form 197-199
STOW 205-207
SYNADAF 209-212

SYNADRLS 213
TRUNC 215
WAIT 217-218
WRITE for
 BDAM 219-220,225-227
 BISAM 221-222
 BPAM 223-224
 BSAM 223-224,225-227
 execute form 231
 list form 229
XLATE 233
macro instruction coding 17-19
magnetic tape
 backspace
 BSP macro 29
 CNTRL macro 57
 considerations with
 BSP macro 29
 CHKPT macro 41
 CLOSE macro 49,50
 CNTRL macro 57
 POINT macro 167,168
 density 89,117
 end-of-file, ignored 97,125
 final volume positioning (FEOV macro) 133
 forward space 58
 interface in DCB 254-255
 read backward 183
 recording technique 89,117
 restriction when using NOTE macro 153
 restriction when using POINT macro 167
 short error recovery procedure 97,125
Mass Storage System (*see* MSS)
master index
 highest level in storage
 address of storage area 72
 size of storage area 72
 number of tracks per level 106
 option specified in DCB 107
MAXDCB operand, PDAB macro 163
member, partitioned data set
 complete a list with BLDL macro 27-28
 locate beginning with FIND macro 135-136
 update directory with STOW macro 205-207
mode
 (*see also* MACRF operand)
 card image
 BSAM 91
 QSAM 119
 data (QSAM) 124,146,174
 load (QISAM) 101
 locate
 QISAM 106,143,171
 QSAM 146,173
 move
 QISAM 106,143,171
 QSAM 124,146,174
 optical mark read
 BSAM 92
 QSAM 120
 read column eliminate
 BSAM 91,92
 QSAM 119,120
 resume load mode 101
 scan (QISAM) 101,106
 substitute (QSAM) 124,146,174

- MODE operand (DCB macro)
 - BSAM 91,92
 - QSAM 119,120
- modifying a parameter list
 - BUILDRCD macro 37
 - CHKPT macro 47
 - CLOSE macro 55
 - OPEN macro 161
 - READ macro 189
 - SETPRT macro 203
 - WRITE macro 231
- move mode
 - QISAM 143,171
 - specified in DCB 106
 - QSAM 146,174
 - specified in DCB 124
- MSHI operand (DCB macro) 72
- MSS (Mass Storage System)
 - device capacity 246
 - in DCB 254,259,261
- MSWA operand (DCB macro) 72
- multiline print option
 - BSAM 93
 - QSAM 120

N

- National Cash Register 8-track paper tape code
 - BSAM 90
 - QSAM 118
- NCP operand (DCB macro)
 - BISAM 72
 - BPAM 79
 - BSAM 96
- next address feedback
 - BDAM (creating) 226
 - BDAM (existing) 178
- nonsequential processing of sequential data 83
- NOTE macro instruction
 - description 153
 - relationship with POINT macro 168
 - restriction when using BSP macro 29
 - specified in DCB for BSAM 95
 - used with BPAM 79
- NTM operand (DCB macro) 106-107
- number of channel programs
 - (see NCP operand)
- number of tracks per index level
 - (see NTM operand)

O

- online printer
 - control 57-59
 - skipping 169,249-250
 - spacing 169,249-250
- OPEN macro instruction
 - execute form 161
 - list form 159
 - relationship to
 - CLOSE macro 49
 - DDNAME operand 64
 - FEOV macro 133
 - GETPOOL macro 151
 - NOTE macro 153
 - POINT macro 167

- READ macro 183
- WRITE macro 223
 - standard form 155-158
- open operation, testing 157-158
- open options 156-157
- operand, substitution for 20-21
- OPTCD operand (DCB macro)
 - BDAM 67
 - BPAM 80
 - BSAM 96-97
 - QISAM 107-108
 - QSAM 124-125
 - SETPRT macro 198
- optical mark read mode
 - BSAM 92
 - QSAM 120
- option codes
 - (see OPTCD operand)
- organization, data set
 - (see access methods)
- OUTIN open option 156
- output data sets
 - closing 49-51
 - opening 155-158
 - WRITE or PUT specified in DCB macro
 - BDAM 66
 - BISAM 71-72
 - BPAM 79
 - BSAM 95-96
 - QISAM 106
 - QSAM 123-124
 - writing
 - BDAM 219-220
 - BISAM 221-222
 - BPAM 223-224
 - BSAM 223-224
 - BSAM (write to a direct data set) 225-226
 - QISAM 171-172
 - QSAM 173-174
 - writing an input record in an output data set
 - using PUTX 175
- OUTPUT open option 156
- overflow
 - area, independent 107
 - channel 169
 - exit address (PRTOV macro) 169-170
 - printer carriage 169-170
 - records
 - (see overflow area)
- overflow feature, track
 - BDAM 68
 - BPAM 80
 - BSAM 98
 - QSAM 126
- overprinting 169-170

P

- paper tape codes
 - BSAM 90
 - QSAM 118
- parallel data access block (PDAB)
 - constructing 163
 - generating a DSECT 165
 - symbolic field names 267

- parameter list construction
 - BUILDRCD macro 35
 - CHKPT macro 45
 - CLOSE macro 53
 - OPEN macro 159
 - READ macro 187
 - SETPRT macro 201
 - WRITE macro 229
- parameter list, modification
 - BUILDRCD macro 37
 - CHKPT macro 47
 - CLOSE macro 55
 - OPEN macro 161
 - READ macro 189
 - SETPRT macro 203
 - WRITE macro 231
- partitioned data set
 - general description 75
 - macro instructions used with 243
 - relationship to
 - BLDL macro 27
 - FIND macro 135
 - STOW macro 205
- PDAB macro instruction 163
- PDABD
 - macro instruction 165
 - symbolic field names 267
- POINT macro instruction
 - description 167-168
 - relationship to
 - BSAM 83
 - NOTE macro 153
 - restriction
 - with BSP macro 29
 - specified in MACRF operand
 - BPAM 79
 - BSAM 95
- position, relative key (RKP) 108
- position feedback
 - current block 177-179,219-220
 - next block 178,226
- positioning volumes
 - using CLOSE macro 49-51
 - using FEOV macro 133
 - using OPEN macro 155-158
- prefix, block
 - BSAM 87
 - QSAM 116
 - relationship to
 - buffer length 87,115
 - data alignment 85,113
- print options (3747)
 - BSAM 91,93
 - QSAM 119,121
- printer
 - carriage control 57-59,169-170
 - character set buffer loading 197-198
 - control characters 249-250
 - control tape 169-170
 - forms control buffer loading 198
 - skipping 57-59,249-250
 - spacing 57-59,249-250
- program, channel
 - BISAM 72
 - BPAM 79
 - BSAM 96

- protection option, data
 - BSAM 91,93
 - QSAM 119,121
- PRTOV macro instruction 169-170
- PRTSP operand (DCB macro)
 - BSAM 90
 - QSAM 118
- punch, card 91,119
- PUT macro instruction
 - data mode (QSAM) 124,174
 - for
 - QISAM 171-172
 - QSAM 173-174
 - locate mode
 - QISAM 171
 - QSAM 173-174
 - move mode
 - QISAM 171
 - QSAM 174
 - relationship with
 - PRTOV macro 169
 - SYNADAF macro 209
 - TRUNC macro 215
 - specified in DCB macro
 - QISAM 106
 - QSAM 124
 - substitute mode (QSAM) 174
- PUTX macro instruction 175
 - output mode 175
 - relationship with TRUNC macro 215
 - specified in DCB macro
 - QISAM 106
 - QSAM 124
 - update mode 175

Q

- QISAM (queued indexed sequential access method)
 - general description 101
 - macro instructions used with 243
 - symbolic field names in DCB 259-261
- QSAM (queued sequential access method)
 - general description 111
 - macro instructions used with 243
 - symbolic field names in DCB 252-258
- queued access technique
 - (see QISAM and QSAM)

R

- RDBACK open option 156
- read backward, magnetic tape 156,183
- read column eliminate mode
 - BSAM 91,92
 - QSAM 119,120
- READ macro instruction
 - execute form 189
 - for
 - BDAM 177-179,185
 - BISAM 181-182
 - BPAM 183-184
 - BSAM 183-184,185
 - list form 187

READ macro instruction (continued)
 relationship to
 BFTEK operand 63
 BUFL operand 64
 CHECK macro 39
 EODAD operand 78,94
 FIND macro 135
 FREEDBUF macro 139
 KEYLEN operand 65
 LIMCT operand 65-66
 MACRF operand 66-67
 NCP operand
 BISAM 72
 BPAM 79
 BSAM 96
 OPTCD operand 67
 POINT macro 167
 RELEX macro 191
 WAIT macro 217
 WRITE macro 220,221,223
 specified in DCB macro
 BDAM 66-67
 BISAM 71-72
 BPAM 79
 BSAM 95-96
 standard form
 BDAM 177-179
 BISAM 181-182
 BPAM 183-184
 BSAM (read direct data set) 185
 BSAM (read sequential data set) 183-184
 reason codes
 BLDL macro 28
 BSP macro 29
 FIND macro 136
 STOW macro 207
 RECFM operand (DCB macro)
 BDAM 68
 BPAM 80
 BSAM 98-99
 QISAM 108
 QSAM 126-127
 record
 area
 construction 33-34
 deletion option (ISAM) 107
 format
 (see RECFM operand)
 length
 (see LRECL operand)
 logical
 GET 143,145
 PUT 171,173
 descriptor word, relationship with
 BLKSIZE operand 103
 BUFOFF operand 87
 LRECL operand 95,105,123
 physical
 (see BLKSIZE operand)
 retrieval 143,145,177-185
 segment 173
 variable-length, spanned 33,114
 writing 171-174,219-227
 recording density, magnetic tape
 BSAM 89
 QSAM 117
 recording technique, magnetic tape
 BSAM 89
 QSAM 117
 register
 contents on entry to
 DCB exit routine 247
 overflow exit routine 169-170
 SYNAD routine 240-241
 DCBD base 129-130
 usage rules 22
 relative addressing
 BDAM 61,67
 BLDL macro 27-28
 FIND macro 135-136
 POINT macro 167-168
 relative key position 108
 release
 buffer 137
 buffer pool 141
 dynamically acquired buffer 139
 exclusive control 191
 QSAM buffer 193
 QSAM buffer 193
 RELEX macro instruction
 description 191
 relationship to MACRF operand 67
 return codes 191
 relexp defined 21
 relocatable expression defined 21
 RELSE macro instruction 193
 reorganization statistics (ISAM) 101,107
 REREAD option
 CLOSE macro 49
 FEOV macro 133
 OPEN macro 156
 restart job from a checkpoint
 automatic 41
 deferred 41
 restore data control block 49
 resume load mode 101
 return codes
 BLDL macro 28
 BSP macro 29
 CHKPT macro 43
 FIND macro 136
 RELEX macro 191
 SETPRT macro 199
 STOW macro 207
 SYNADAF macro 211
 SYNADRLS macro 213
 WRITE macro 227
 RETURN macro, relationship with SYNAD operand
 BDAM 68
 BISAM 73
 BPAM 81
 BSAM 99
 QISAM 109
 QSAM 127
 REWIND option
 CLOSE macro 49
 FEOV macro 133
 RKP operand (DCB macro) 108
 relationship with LRECL operand 105
 R0 (see capacity record)

S

- save area
 - general register requirements 22
 - SYNADAF requirement 209
 - SYNADRLS macro 213
- scan mode 101,106
- search
 - partitioned data set directory
 - BLDL macro 27
 - FIND macro 135
 - type of
 - BDAM 219-220
 - QISAM 106
- search argument
 - BDAM 66
 - QISAM 106
- search direct option 97,125
- search option, extended 67
- segment
 - buffer 171
 - descriptor word 86,185
 - work area 64
- sequential access methods
 - (see access methods)
- services, optional
 - BDAM 67
 - BPAM 80
 - BSAM 96-97
 - QISAM 107-108
 - QSAM 124-125
 - SETPRT macro 198
- SETL macro instruction
 - description 195-196
 - relationship to
 - ESETL macro 131
 - GET macro 143
- SETPRT macro instruction
 - execute form 203
 - list form 201
 - return codes 198
 - standard form 197-199
- simple buffering 114
- skipping, printer
 - (see also spacing, printer)
 - CNTRL macro 57-58
 - control characters 249-250
- SMSI operand (DCB macro) 72-73
- SMSW operand (DCB macro) 73
- space, magnetic tape
 - backward 27,57
 - forward 57
- space allocation, data set
 - BPAM 75
 - QISAM 101
- spacing, printer
 - (see also skipping, printer)
 - CNTRL macro 57-59
 - control characters 249-250
 - specified in DCB macro
 - BSAM 90
 - QSAM 118
- STACK operand (DCB macro)
 - BSAM 91,93
 - QSAM 119,121
- stacker selection
 - CNTRL macro 57-58
 - control characters 249-250
 - specified in DCB macro
 - BSAM 91,93
 - QSAM 119,121
- statistics reorganization (ISAM) 101,107
- status
 - following an I/O operation 235-242
 - indicators 242
- STOW macro instruction
 - description 205-207
 - directory action 206
 - reason codes 207
 - return codes 207
- substitute mode
 - GET macro 146
 - PUT macro 174
 - specified in DCB macro 124
- switching volumes
 - CHECK macro 39
 - CLOSE macro 49
 - FEOV macro 133
- symbol defined 20
- SYNAD operand (DCB macro)
 - BDAM 68
 - BISAM 73
 - BPAM 81
 - BSAM 99
 - QISAM 109
 - QSAM 127
- SYNAD routine
 - exception codes
 - BDAM 239
 - BISAM 236
 - QISAM 237
 - register contents
 - BDAM 241
 - BISAM 240
 - BPAM 241
 - BSAM 241
 - QISAM 240
 - QSAM 241
 - relationship with
 - CHECK macro 39
 - CNTRL macro 59
 - DCB macro 97,125
 - GET macro 143,147
 - POINT macro 168
 - PUT macro 172,174
 - PUTX macro 175
 - SETL macro 196
 - SYNADAF macro 209
- specifying in DCB macro
 - BDAM 68
 - BISAM 73
 - BPAM 81
 - BSAM 99
 - QISAM 109
 - QSAM 127

SYNAD routine (continued)
 status indicators
 BDAM 235,242
 BISAM 235
 BPAM 235,242
 BSAM 235,242
 QISAM 235
 QSAM 235,242
 SYNADAF macro instruction
 description 209-212
 relationship with SYNADRLS macro 213
 return codes 211
 SYNADRLS macro instruction 213
 relationship with SYNADAF macro 209
 synchronizing I/O operations 39,217-218
 synchronous error exit
 (see SYNAD operand)
 SYSIN restrictions
 BSP macro 29
 CLOSE macro 49
 CNTRL macro 57
 DEVD operand (DCB macro)
 BSAM 88
 QSAM 116
 FEOV macro 133
 MACRF operand 95
 NOTE macro 153
 OPEN macro 155
 OPTCD operand 97,125
 POINT macro 168
 PUTX macro 175
 RECFM operand 99,126
 RELSE macro 193
 SYSOUT restrictions
 BSP macro 29
 CLOSE macro 49
 CNTRL macro 57
 FEOV macro 133
 MACRF operand 95
 NOTE macro 153
 OPEN macro 155
 OPTCD operand 97,125
 POINT macro 168
 PUTX macro 175

T

tape codes, paper
 BSAM 90
 QSAM 118
 tape density, magnetic
 BSAM 89
 QSAM 117
 tape error recovery procedure
 BSAM 97
 QSAM 125
 tape recording technique
 BSAM 89
 QSAM 117
 Teletype 5-track paper tape code
 BSAM 90
 QSAM 118
 temporary close of data set 49-51

termination, abnormal
 Check routine 39
 end of data
 (see EODAD operand)
 uncorrectable I/O error
 (see SYNAD operand)
 testing completion of I/O 39,217
 testing for open data set 157-158
 totaling exit, user
 BSAM 94
 list format 247
 QSAM 123
 track addressing, relative
 BDAM 61,67
 BLDL macro 27-28
 FIND macro 135-136
 POINT macro 167-168
 track index write, full 107
 track-overflow feature
 BDAM 68
 BPAM 80
 BSAM 98
 QSAM 126
 restrictions
 chained scheduling 80,126
 exchange buffering 114,126
 ISAM 101
 translation
 ASCII to EBCDIC
 CHECK macro 39
 GET macro 145
 XLATE macro 233
 EBCDIC to ASCII
 PUT macro 173
 WRITE macro 223
 XLATE macro 233
 paper tape code 90,118
 transmittal modes
 (see also MACRF operand)
 data 124,146
 locate 143,146,171,174
 move 143,146,171,174
 specifying 106,124
 substitute 146,174
 TRTCH operand (DCB macro)
 BSAM 89
 QSAM 117
 TRUNC macro instruction 215
 specified in QSAM DCB 124
 truncating a block 215
 TYPE=P (GET macro) 147
 TYPE=T (CLOSE macro) 49-51

U

U-format records
 BDAM 68
 BPAM 80
 BSAM 98
 QSAM 126
 UCS feature
 unblocking data checks 97,125
 UCS operand (SETPRT macro) 197-198

- unblocking data checks
 - BSAM 97
 - QSAM 125
 - SETPRT macro 197
- uncorrectable I/O errors
 - (see SYNAD operand)
- undefined length records
 - (see U-format records)
- universal character set
 - (see UCS operand)
- unmovable data sets
 - (see DSORG operand)
- UPDAT open option 156
- updating partitioned data set directory 205-207
- user
 - data in partitioned data set directory
 - BLDL macro 27-28
 - STOW macro 205-207
 - label exit
 - BSAM 94
 - list format 247
 - QSAM 123
 - totaling exit
 - BSAM 94
 - list format 247
 - QSAM 123
- USING statement requirement
 - DCBD macro 129
 - PDABD macro 165

V

- V-format records
 - BDAM 68
 - BPAM 80
 - BSAM 98
 - QISAM 108
 - QSAM 126
- validity checking, write
 - BDAM 67
 - BPAM 80
 - BSAM 97
 - QISAM 107
 - QSAM 125
- variable-length, spanned records
 - (see also V-format records)
 - BDAM 62-63,225
 - BSAM 86,225
 - QSAM 114,173
 - restriction with FEOV 133
 - restriction with GET 145
- variable-length records
 - (see V-format records)
- volume, forcing end of 133
- volume positioning
 - CHECK macro 39
 - CLOSE macro 49-51
 - FEOV macro 133
 - OPEN macro 155-158
 - POINT macro 167-168
- volume switching 39

W

- WAIT macro instruction
 - description 217-218
 - relationship to
 - MACRF operand 66
 - READ macro 177,181
 - WRITE macro 219,221
- work area for BISAM
 - address of 72
 - size of 72
- WRITE macro instruction
 - execute form 231
 - list form 229
 - relationship to
 - BUFL operand 64
 - CHECK macro 39
 - KEYLEN operand 65
 - LIMCT operand 65-66
 - MACRF operand 66,67
 - NCP operand
 - BISAM 72
 - BPAM 79
 - BSAM 96
 - OPTCD operand 67
 - POINT macro 167
 - PRTOV macro 169
 - READ macro 181
 - RELEX macro 191
 - SYNADAF macro 209
 - WAIT macro 217
 - specified in DCB macro
 - BDAM 66
 - BISAM 72
 - BPAM 79
 - BSAM 96
 - standard form
 - BDAM (create with BSAM) 225-227
 - BDAM (existing) 219-220
 - BISAM 221-222
 - BPAM 223-224
 - BSAM 223-224
 - testing for completion 39,217-218
- WTOR macro, relationship with SETPRT macro 198

X

- XCTL macro, relationship with BLDL macro 27
- XLATE macro instruction 233



International Business Machines Corporation
Data Processing Division
1133 Westchester Avenue, White Plains, New York 10604
(U.S.A. only)

IBM World Trade Corporation
821 United Nations Plaza, New York, New York 10017
(International)

OS/VS Data Management Macro Instructions
GC26-3793-4

**Reader's
Comment
Form**

Your comments about this publication will help us to improve it for you. Comment in the space below, giving specific page and paragraph references whenever possible. All comments become the property of IBM.

Please do not use this form to ask technical questions about IBM systems and programs or to request copies of publications. Rather, direct such questions or requests to your local IBM representative.

If you would like a reply, please provide your name, job title, and business address (including ZIP code).

Fold on two lines, staple, and mail. No postage necessary if mailed in the U.S.A. (Elsewhere, any IBM representative will be happy to forward your comments.) Thank you for your cooperation.

Fold and Staple


██████████
First Class Permit
Number 439
Palo Alto, California

Business Reply Mail

No postage necessary if mailed in the U.S.A.

Postage will be paid by:

IBM Corporation
System Development Division
LDF Publishing—Department J04
1501 California Avenue
Palo Alto, California 94304



Fold and Staple



International Business Machines Corporation
Data Processing Division
1133 Westchester Avenue, White Plains, New York 10604
(U.S.A. only)

IBM World Trade Corporation
821 United Nations Plaza, New York, New York 10017
(International)