

Multiple Microprocessor Support

Real-Time Trace Option

The 8002 Microprocessor Lab is a complete software development system for the design of microprocessor-based products. A key feature is its ability to support many microprocessor chips, including the Intel 8085A and 8080A, Motorola 6800, Texas Instruments TMS9900, and Zilog Z80A. In addition to multiple microprocessor support, the 8002 offers a superior operating system and powerful text editor, assembler, and debugging programs; three optional levels of emulation for software debugging, partial and full emulation; and a real-time prototype analyzer option offering all the capabilities of a microprocessor analyzer with eight channels of external input.


Software Development and Debugging

In a typical design sequence, software is developed using all the resources of TEK-DOS, the disc-operating system software for the 8002 Microprocessor Lab. TEK-DOS performs flexible disc and file utility functions, data transfer functions, and system/peripheral device control functions. In addition to relieving the user of these housekeeping chores, TEK-DOS also supervises the text editor, assembler, and linker programs and the optional emulation support, debugging system, and PROM programming routines.

Program entry and editing may be accomplished module by module. The line-oriented text editor provides 150 60-character lines of buffer workspace, and offers several convenience features for preparing, correcting, and modifying the program quickly and easily. The macro assembler allows a multiple-step routine to be defined by one new command. At the end of each work session, file space is allocated by TEK-DOS; duplicate files of important material may be readily created. When program entry has been completed, all program files may be merged with a single TEK-DOS command.

The assembler processor, with the appropriate disc inserted in the flexible disc drive, performs program assembly functions for each microprocessor supported by the 8002.

After an error-free assembly listing has been obtained, the resulting object code may be executed in system emulation (mode 0) on the optional emulator processor. The emulator processor is identical to the microprocessor that will finally be installed in the user's prototype. Execution is performed under control of the debugging system; during execution, program steps can be traced, software breakpoints can be set, and memory can be examined and changed as required. Should an error be discovered, that portion of the program can be corrected at the source level using the text editor. It can then be reassembled and executed again. This procedure continues until the program is correct.

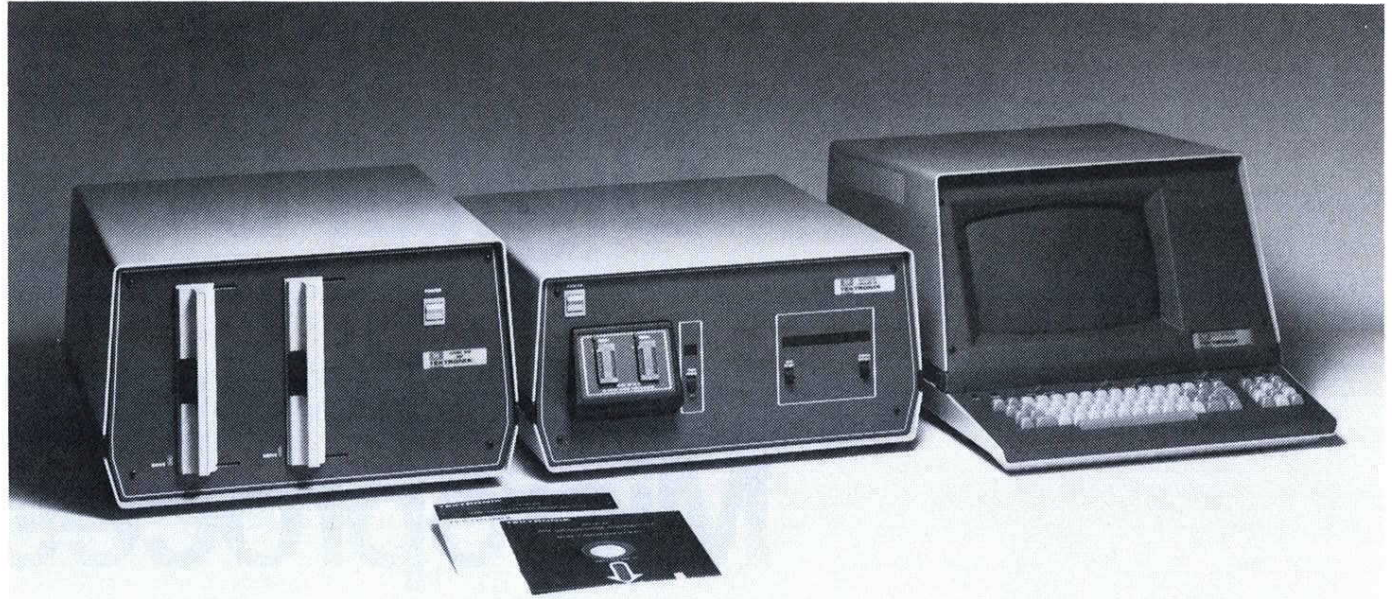

The 8002 Microprocessor Lab consists of the 8002 mainframe; the dual flexible disc unit; an optional system terminal (TEKTRONIX CT8100 or CT8101 recommended); and two sets of assembler software for two different microprocessors, chosen from the microprocessors supported at time of purchase. An emulator processor module for each microprocessor the system supports, and its associated prototype control probe, are offered as options.

Partial and Full Emulation

After the software has been debugged, it may be exercised on the prototype circuitry in the partial emulation mode (mode 1). During partial emulation, control may be released from the 8002 to the prototype in stages. The developmental software runs using 8002 memory space and prototype I/O and clock. The 8002 memory mapping feature allows memory to be gradually mapped over to the prototype in 128-byte address blocks. Throughout partial emulation, the user has access to prototype circuitry through the debugging system, which enables him, as before, to trace, set breakpoints, examine and change memory and register contents.

In full emulation (mode 2) the program is run on the prototype, but program execution is still under the complete control of the debugging system. All I/O and timing functions are directed by the prototype; all memory has been mapped over to the prototype; and only the prototype control probe is still in place, emulating the target microprocessor. Although the prototype is effectively free-standing, then, the user may still direct program activity from the 8002.

8002 CHARACTERISTICS

The 8002 Microprocessor Lab is a modular system whose mainframe houses up to 20 plug-in circuit boards. Two Assembler Software Support packages for the microprocessors of choice are selected at the time of purchase; their associated Emulator Support packages may be ordered as options. A terminal is necessary for system operation, and may be ordered as an optional peripheral.

The Real-Time Prototype Analyzer module, additional 16K byte Program Memory modules, and PROM Programmer modules for the 1702 or 2704/2708 are available as system options.

A system communications module provides three RS-232-C-compatible ports for interface with system peripherals. Two ports are designated for such peripherals as the optional TEKTRONIX CT8100 Crt Terminal, CT8101 Console Terminal, and LP8200 Line Printer. The remaining port is designated as a communications port for use with a modem. Baud rate is selectable for each port as 110, 300, 600, 1200, or 2400.

8002 PHYSICAL CHARACTERISTICS

Dimensions	cm	in
Height	24.7	9.6
Width	48.3	18.8
Length	57.3	22.3
Weight	kg	lb
Net	30	66

8002 ENVIRONMENTAL CHARACTERISTICS

Temperature	
Operating	0°C to +35°C (+32°F to 95°F).
Storage	Not available.
Humidity	To 90° relative noncondensing.
Altitude	
Operating	To 15,000 ft max.
Storage	To 50,000 ft max.

8002 ELECTRICAL CHARACTERISTICS

Ac Input Voltages	115 V ac $\pm 10\%$ or 230 V ac $\pm 10\%$.
Frequency Range	60 Hz (50 Hz special order).

8002 DUAL FLEXIBLE DISC CHARACTERISTICS

Flexible Disc Unit — The Flexible Disc Unit consists of two disc drives, a controller, and power supplies. The two disc drives are designated as drive 0 and drive 1. Drive 0 is the default system drive. System programs are placed in this drive, including disc-operating system programs, the text editor, and the debugging routines peculiar to a specific emulator processor. Drive 1 may be used for storing user files, for modifying user files, or as a scratch data area. Drive 0 or drive 1 may be designated as the system drive.

Disc Organization — Each disc contains 77 concentric tracks. Each quarter track, or block, is split into eight sectors, and each sector can contain 128 bytes. Due to directory limitations, a maximum of 72 files

can be contained on one disc. The disc-operating system reserves track 0 for the disc directory; tracks one through four are normally automatically reserved for system programs.

Write Protection — Each disc has a write-protect slot. If the slot is covered, the disc is write-enabled; if the slot is not covered, the disc is write-protected. If an attempt is made to write to a write-protected disc, an error message will be displayed on the appropriate peripheral.

ENVIRONMENTAL CHARACTERISTICS

Temperature	
Operating	+10°C to 35°C (+50°F to 95°F).
Storage	Not available.
Humidity	
Operating	To 90% relative noncondensing.
Storage	Not available.
Altitude	
Operating	To 15,000 feet max.
Storage	To 50,000 feet max.

PHYSICAL CHARACTERISTICS

Size	cm	in
Height	27	10.5
Width	44	17.5
Length	60	23.6
Weight	kg	lb
Net	38.6	85

ELECTRICAL CHARACTERISTICS


Line Voltages	Voltage	Current
	115 V ac ±10%	3.5 A
	230 V ac ±10%	2.0 A
Line Frequency	60 Hz (50 Hz special order).	

DISC UNIT CHARACTERISTICS

Capacity		Bits	Bytes
Per Disc	77 x 32 x 128 x 8 bits =	2,523,136	315,392
Per Track	32 x 128 x 8 bits =	32,768	4,096
Per Sector	128 x 8 bits =	1,204	128
Access Time	10 ms/track		

ORDERING INFORMATION*

8002 Microprocessor Lab \$9950

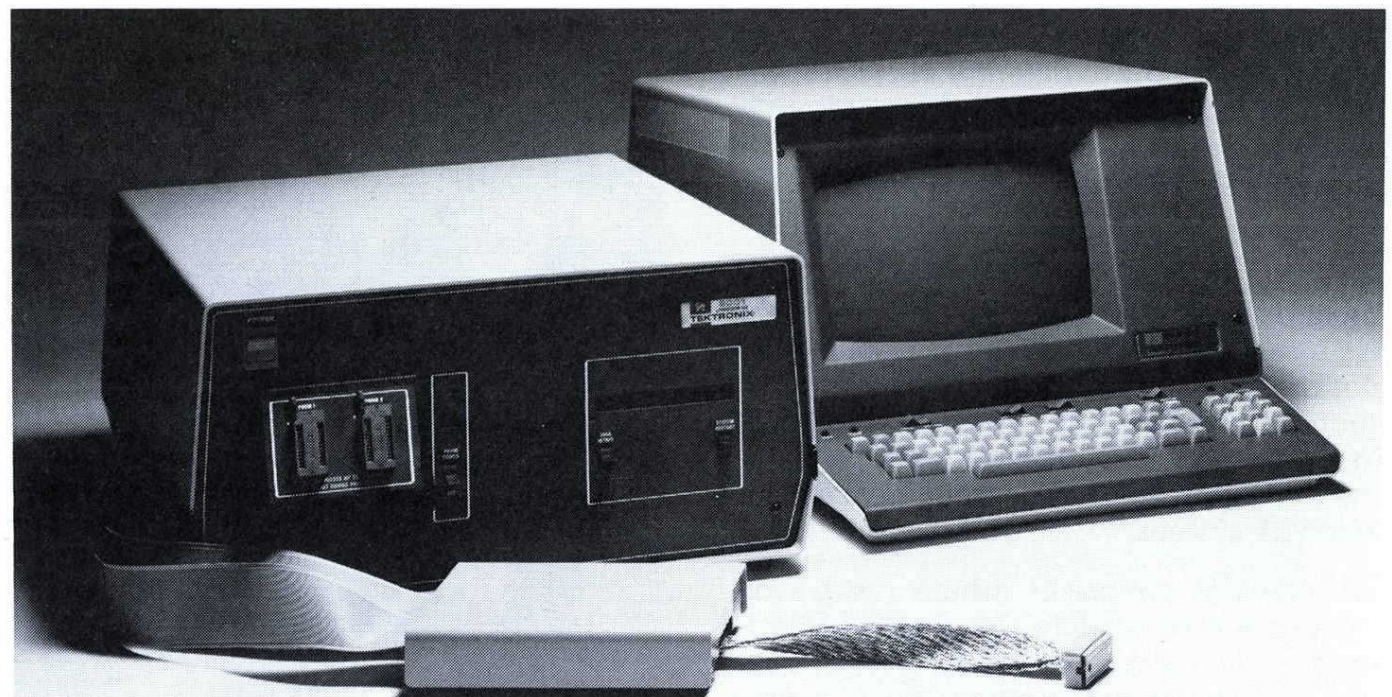

The 8001 Microprocessor Lab consists of the 8001 mainframe; an optional system terminal (TEKTRONIX CT8100 or CT8101 recommended); and a Microprocessor Support Package for the microprocessor selected. A support package includes an emulator ROM, an emulator processor, and a prototype control probe.

**Multiple Microprocessor Support
Real-Time Trace Option**

The 8001 Microprocessor Lab is a total hardware debugging environment for the design of microprocessor-based products. A key feature is its ability to support many microprocessor chips, including the Intel 8085A and 8080A, Motorola 6800, Texas Instruments TMS9900 and Zilog Z80A. In addition to multiple microprocessor support, the 8001 offers three emulation modes for software debugging, partial and full emulation, as well as a real-time prototype analyzer option offering all the capabilities of a microprocessor analyzer with eight channels of external input.

Three Emulation Modes

In a typical design sequence, software is first developed independently using time-sharing, a minicomputer, another development system, or some other means. It is then downloaded to the 8001. At this point the in-prototype emulation and software/hardware integration capabilities of the 8001 come into play.

In emulation mode 0, the software runs only on the emulator processor. This enables the program to be debugged on a microprocessor identical to the one that will ultimately be used in the completed product. In emulation modes 1 and 2, the prototype control probe is connected to the emulator processor at one end and plugged into the prototype's empty microprocessor socket at the other.

Partial emulation (mode 1) lets the user release control in methodical steps from the 8001 to the prototype. The developmental software runs using 8001 memory space and prototype I/O and clock. The 8001 memory mapping feature allows memory to be gradually mapped over to the prototype in address blocks. Throughout partial emulation, the user has access to prototype circuitry via the powerful 8001 debugging system, which enables him to trace, set breakpoints, examine and change memory and register contents.

Full emulation (mode 2) lets the user exercise the program on the prototype while still

maintaining complete control through the Microprocessor Lab. All I/O and timing functions are directed by the prototype; all memory has been mapped over to the prototype; and only the prototype control probe is still in place, emulating the target microprocessor. Although the prototype is effectively free-standing, then, the user may still direct program activity through the prototype control probe.

8001 CHARACTERISTICS

The 8001 Microprocessor Lab is a modular system whose mainframe houses up to 20 plug-in circuit boards. An emulator processor module for the microprocessor of choice, its associated prototype control probe, and a ROM-based software module are provided with the system. Additional Emulator Processor packages are available as options for each microprocessor the system supports. A terminal is necessary for system operation, and may be ordered as an optional peripheral.

The Real-Time Prototype Analyzer module, additional 16K byte Program Memory modules, and PROM Programmer modules for the 1702 or 2704/2708 are available as system options.

A system communications module provides three RS-232-C-compatible ports for interface with system peripherals. Two ports are designated for such peripherals as the optional TEKTRONIX CT8100 Crt Terminal, CT8101 Console Terminal, and LP8200 Line Printer. The remaining port is designated as a communications port for use with a modem. Baud rate is selectable for each port as 110, 300, 600, 1200, or 2400.

8001 PHYSICAL CHARACTERISTICS

Dimensions	cm	in
Height	24.7	9.6
Width	48.3	18.8
Length	57.3	22.3
Weight	kg	lb
Net	30	66

8001 ENVIRONMENTAL CHARACTERISTICS

Temperature	
Operating	0°C to +35°C (+32°F to 95°F).
Storage	Not available.
Humidity	
To 90% relative noncondensing.	
Altitude	
Operating	To 15,000 feet max.
Storage	To 50,000 feet max.

8001 ELECTRICAL CHARACTERISTICS

Ac Input Voltages	115 V ac ±10% or 230 V ac ±10%.
Frequency Range	60 Hz (50 Hz special order).

ORDERING INFORMATION*

8001 Microprocessor Lab \$7650

*The 8002 and 8001 may not be available in some areas of the world. Consult your Distributor or Representative.

Emulator Processor and Prototype Control Probe Support Packages

The 8002 and 8001 Microprocessor Labs currently support five different microprocessors: the Intel 8085A and 8080A, Motorola 6800, Texas Instruments TMS9900, and Zilog Z80A. Tektronix will continue to introduce support for selected microprocessors on a regular schedule.

Emulator packages for the 8002 and 8001 may be ordered as system options; one emulator package is provided at the time of purchase with the 8001. These options provide the capabilities necessary to fully emulate the target microprocessor in a user's prototype system.

The emulator processor, which resides on a plug-in circuit module along with controlling logic circuitry, enables the user to execute and debug the program on a microprocessor identical to the one which will be used in the prototype, while giving him access to the full 64K bytes of Microprocessor Lab program memory.

The prototype control probe, which links the emulator processor to the prototype system, allows partial and full in-circuit emulation.

All emulation operations are controlled by the powerful Microprocessor Lab system software. The user is able to monitor program execution, set software breakpoints, examine and change memory and register contents. Debug trace information is displayed in a format unique to the microprocessor, with instruction fetches disassembled into mnemonics for easy interpretation.

8080 EMULATOR SUPPORT PACKAGE CHARACTERISTICS

8080 and 8080A refer to microprocessors manufactured by Intel Corporation. Tektronix, Inc., does not guarantee that other vendors' versions of the 8080 will be compatible with the TEKTRONIX Microprocessor Labs.

PHYSICAL CHARACTERISTICS

Length 6 ft of cable from the emulator processor to the interface assembly.
1.5 ft of cable from the interface assembly to the 40 pin plug.

Cable Configuration
6 ft 2 40 conductor ribbon cables with alternating ground and signal paths.
1.5 ft 2 twisted pair 40 conductor cables.


Termination
6 ft The interface assembly contains resistive termination and receivers for data, address, and control from the emulator processor module.
1.5 ft Not terminated.

40 pin plug—40 pin spring plate protected plug. When used with a zero insertion force socket, an included 40 pin low profile DIP socket must be used between the zero insertion force socket and the 40 pin probe plug.

TIMING CHARACTERISTICS

Emulation Interface Delays*

To 8080 from Interface Assembly	Typ	Max (in ns)
ø1	44	60
ø2	44	60
HOLD	44	67
RESET	44	67
RDY**	35	40
INT	63	104
DATA	44	53

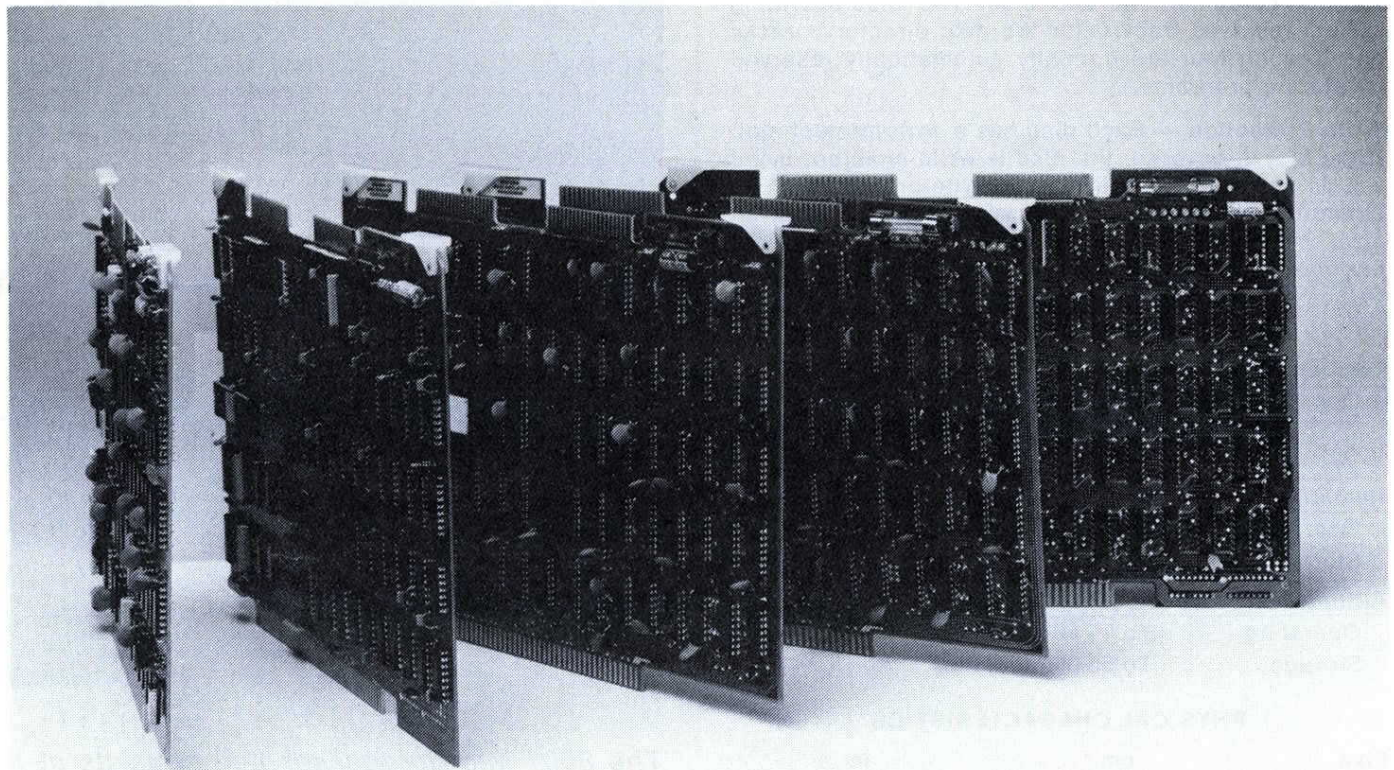

From 8080 to Interface Assembly	Typ	Max (in ns)
HOLDA***	39	55
SYNC	37	45
WAIT	37	45
WR	37	45
DBIN	37	45
INTE	39	55
ADDRESS	27	35
DATA	50	63

*Assumes 6 ft of cable at 1.5 ns/ft.

**RDY is ignored unless user memory or I/O is accessed in control mode 2 or special mode.

***The equation for HOLDA to tristate timing is as follows: $HOLDA \cdot DBIN = FLOAT$. Tristate of data and address follows the trailing edges of DBIN or WR by approximately 20 ns.

ORDERING INFORMATION

Option Description	Factory Price	Field Number	Field Price
8001 Microprocessor Lab	\$7650		
Option 01 8080 Microprocessor Support Package	NC	8001F01	\$2950
8002 Microprocessor Lab	\$9950		
Option 01 8080 Assembler Software Support	NC	8002F01	\$ 550
Option 16 8080 Emulator Support	+\$1850	8002F16	\$1950
Option 31 8080 Prototype Control Probe	+\$ 850	8002F31	\$ 950

6800 EMULATOR SUPPORT PACKAGE CHARACTERISTICS

6800 refers to microprocessors manufactured by Motorola Corporation. Tektronix, Inc., does not guarantee that other vendors' versions of the 6800 will be compatible with the TEKTRONIX Microprocessor Labs.

PHYSICAL CHARACTERISTICS

Length 6 ft of cable from the emulator processor to the interface assembly.
1 ft of cable from the interface assembly to the 40-pin plug.

Cable Configuration
6 ft 2 40 conductor ribbon cables with alternating ground and signal paths.
1 ft 2 twisted pair 40 conductor cables made up of signal/ground pairs.

TIMING CHARACTERISTICS

Emulation Interface Delays*

To 6800 from Interface Assembly	Maximum	TPCS ¹ (in ns)
ø1	26	—
ø2	26	—
NMI	30	200
IRQ	67	200
RESET	94	200
HALT**	72	—
DATA	28	114 (input setup)
DBE****	—	—
TSC***	not used	—

From 6800 to Interface Assembly	Maximum	TAD ² (in ns)
ADDRESS	20	300
DATA****	28	460
VMA	45	300
R/W	63	300
BA	35	—

*Assumes 6 ft of cable at 1.5 ns/ft.

**HALT must occur within 80 ns after the falling edge of ø1 to be recognized at the rising edge of the following ø2.

***Delay to tristate, TSD=36 ns. Tristate is performed by the interface buffers, not by the 6800.

****Data from the 6800 will be available to the prototype 460 ns after the rising edge of ø1 or DBE + 36 ns, whichever is greater.

¹TPCS—Control signal setup time prior to ø2 falling edge.

²TAD—Output propagation delay from clock after ø1 rising edge.

ORDERING INFORMATION

Option Description	Factory Price	Field Number	Field Price
8001 Microprocessor Lab	\$7650		
Option 02 6800 Microprocessor Support Package	NC	8001F02	\$2950
8002 Microprocessor Lab	\$9950		
Option 02 6800 Assembler Software Support	NC	8002F02	\$ 550
Option 17 6800 Emulator Support	+\$1850	8002F17	\$1950
Option 32 6800 Prototype Control Probe	+\$ 850	8002F32	\$ 950

Z80 EMULATOR SUPPORT PACKAGE CHARACTERISTICS

Z80 and Z80A refer to microprocessors manufactured by Zilog Corporation. Tektronix, Inc., does not guarantee that other vendor's versions of the Z80 will be compatible with the TEKTRONIX Microprocessor Labs.

PHYSICAL CHARACTERISTICS

Length 6 ft of cable from the emulator processor to the interface assembly.

1 ft of cable from the interface assembly to the 40 pin plug.

Cable Configuration

6 ft 2 40 conductor ribbon cables with chassis ground plane and signal paths.
1 ft 2 40 conductor twisted pair cables.

Termination

6 ft The interface assembly contains receivers for data, address, and control from the Z80 emulator processor module.

1 ft Not terminated.

TIMING CHARACTERISTICS

The Z80 emulator processor was designed to match the ac characteristics of the Z80 microprocessor with two exceptions. Those exceptions are:

Prototype Clock

The prototype clock may not be stretched over a total of 10 μ s during any one memory or I/O request when a Microprocessor Lab memory access may occur in the next cycle. This exception is valid only if the prototype clock runs in excess of 1 MHz.

NMI

NMI (Non Maskable Interrupt) must occur one-half cycle earlier than in a standard Z80 configuration. This means the NMI must occur before the next to last trailing edge of the M cycle just prior to M1.

ORDERING INFORMATION

Option Description	Factory Price	Field Number	Field Price
8001 Microprocessor Lab	\$7650		
Option 03 Z80 Microprocessor Support Package	NC	8001F03	\$2950
8002 Microprocessor Lab	\$9950		
Option 03 Z80 Assembler Software Support	NC	8002F03	\$ 550
Option 18 Z80 Emulator Support	+\$1850	8002F18	\$1950
Option 33 Z80 Emulator Prototype Control Probe	+\$ 850	8002F33	\$ 950

TMS9900 EMULATOR SUPPORT PACKAGE CHARACTERISTICS

TMS9900 refers to microprocessors manufactured by Texas Instruments Corporation. Tektronix, Inc., does not guarantee that other vendor's versions of the TMS9900 will be compatible with the TEKTRONIX Microprocessor Labs.

PHYSICAL CHARACTERISTICS

Length 6 ft of cable from the emulator processor to the interface assembly.

9.5 in of cable from the interface assembly to the 64 pin plug.

Cable Configuration


6 ft 2 40 conductor ribbon cables with chassis ground plane and signal paths.

9.5 in 2 32 conductor twisted pair cables.

Termination

6 ft The interface assembly contains receivers for data, address, and control from the TMS 9900 emulator processor module.

9.5 in Not terminated.

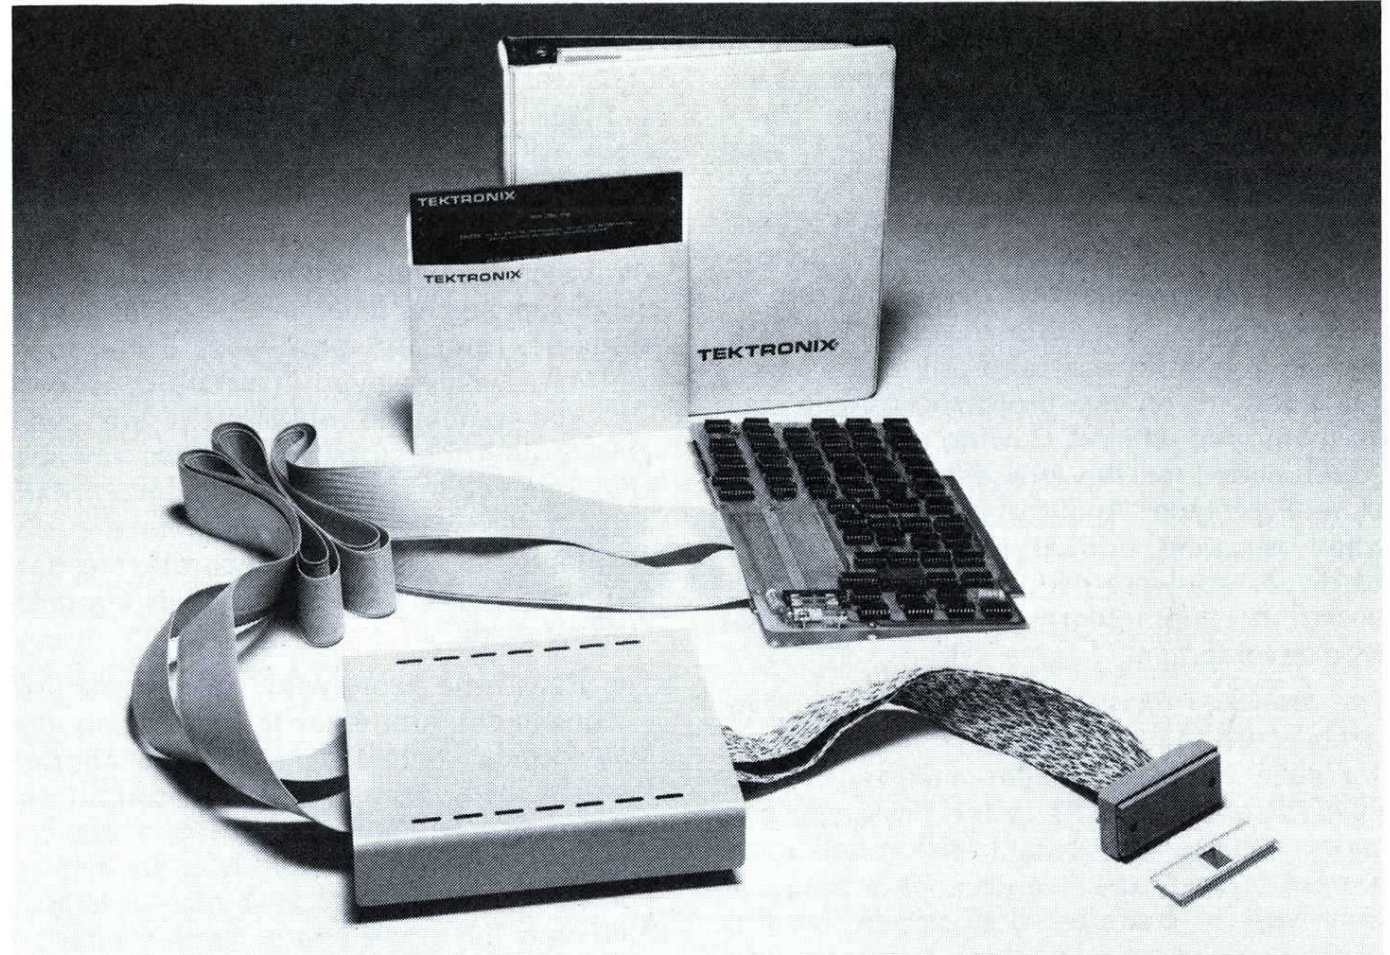

TIMING CHARACTERISTICS

To TMS9900 from Interface Assembly	Emulation Typical	Interface Delays* Maximum (in ns)
ϕ 1	41	59
ϕ 2	41	59
ϕ 3	41	59
ϕ 4	41	59
CRUIN	12	23
INTREQ	12	18
1C0	12	23
IC1	12	23
IC2	12	23
IC3	12	23
HOLD	12	18
READY	12	18
LOAD	12	18
RESET	68	98
DATA	14	21

From TMS9900 to Interface Assembly	Typical	Maximum (in ns)
DBIN	24	41
MEMEN	12	18
WE	12	18
CRUCK	12	23
CRUOUT	12	23
HOLDA	12	23
WAIT	12	23
IAQ	12	23
ADDRESS	14	21
DATA	14	21

*Assumes 1.5 ft of cable at 1.5 ns/ft.

Note: All inputs and outputs of the 64 pin plug at the end of the prototype control probe are buffered by 74LSXXX type devices. In all cases, data and control should not change during clock ϕ 1.

ORDERING INFORMATION

Option Description	Factory Price	Field Number	Field Price
8001 Microprocessor Lab	\$7650		
Option 04 TMS9900 Microprocessor Support Package	+\$ 400	8001F04	\$3350
8002 Microprocessor Lab	\$9950		
Option 04 TMS9900 Assembler Software Support	NC	8002F04	\$ 550
Option 19 TMS9900 Emulator Support	+\$2100	8002F19	\$2200
Option 34 TMS9900 Prototype Control Probe	+\$1000	8002F34	\$1100
Option 49 16K Memory Module*	+\$1100	8002F49	\$1210

*One supplied with either Microprocessor Lab.

8085 EMULATOR SUPPORT PACKAGE CHARACTERISTICS

8085 and 8085A refer to microprocessors manufactured by Intel Corporation. Tektronix, Inc., does not guarantee that other vendor's versions of the 8085 will be compatible with the TEKTRONIX Microprocessor Labs.

PHYSICAL CHARACTERISTICS

Length 6 ft of cable from the emulator processor to the interface assembly.

1 ft of cable from the interface assembly to the 40 pin plug.

Cable Configuration

6 ft 2 40 conductor ribbon cables with chassis ground plane and signal paths.

1 ft 2 40 conductor twisted pair cables.

Termination

6 ft The interface assembly contains receivers for data, address, and control from the 8085 emulator processor module.

1 ft Not terminated.

AC CHARACTERISTICS

Emulation Clock

Mode 1 or Mode 2 6.25 MHz max*; crystal, (user's clock), with RC timing network or 8085 Prototype Control Probe. TTL input to X1.

Mode 0 (system clock) 6.25 MHz \pm 0.01%

Operational Speed

Full speed or 1 wait state per machine cycle during 8001/8002 program memory access selectable with jumper.

One wait state per machine cycle is inserted when using DEBUG breakpoints (BKPT) regardless of jumper position. When the Real-Time Prototype Analyzer option is installed, real-time operation with breakpoints automatically ensured during DEBUG by using the event triggers (EVT).

*A clock error detection circuit ensures that the user's clock is operational and basically within Intel max (1 μ s) and min (160 ns) specifications.

ORDERING INFORMATION

Option Description	Factory Price	Field Number	Field Price
8001 Microprocessor Lab	\$7650		
Option 05 8085 Microprocessor Support Package	NC	8001F05	\$2950
8002 Microprocessor Lab	\$9950		
Option 05 8085 Assembler Software Support	NC	8002F05	\$ 550
Option 20 8085 Emulator Support	+\$1850	8002F20	\$1950
Option 35 8085 Prototype Control Probe	+\$ 850	8002F35	\$ 950

Real-Time Prototype Analyzer

The Real-Time Prototype Analyzer, Option 46 for the 8002 and 8001 Microprocessor Labs, is comprised of a real-time trace module, a data acquisition interface, and an 8-channel general logic probe. This option provides a real-time trace of the user program executing on the emulator processor, with 43 channels of data acquired simultaneously. The prototype address bus, data bus, control bus, and any eight external locations on the prototype circuit may be monitored without slowing up the operational speed of the processor. The Real-Time Prototype Analyzer is indispensable when isolating critical timing errors and hardware/software sequence discrepancies during the final integration phases of prototype development.

The analyzer module is a separate plug-in circuit card that may be inserted into either the 8002 or 8001 system mainframe. The P6451 Probe connects to the prototype circuitry and permits data transference from the prototype to the analyzer. Data from the prototype is buffered and driven by the probe to the data acquisition interface, and then loaded into the analyzer module's real-time trace buffer.

As the user program executes on the emulator processor, 48-bit data words are sequentially acquired from the prototype and loaded into the real-time trace buffer. Each data word contains 16-bit data from the address bus; 8-bit or 16-bit data from the data bus; 8-bit data from the test probe; 3-bit data identifying cycle type (read, write, I/O, memory, or instruction fetch); and 5-bit data used internally to identify last start/stop of the emulator processor. The analyzer will continue to acquire these sequential cycles of logic input until the processor is stopped or the real-time trace buffer is frozen by a specified trigger occurrence. The real-time trace buffer can retain up to 128 data words in pre-, variable center, or post-trigger modes; thus enabling the storage of pertinent program bus transactions.

The Real-Time Prototype Analyzer offers expanded breakpoints to aid in efficient location of prototype problems. Two event comparators located within the analyzer module can be utilized to halt program execution and stop real-time trace. A trigger may be generated on any specific data occurrence in the address bus, data bus, test probe input, and instruction cycle type. Triggering may be immediate; delayed by counting the number of passes; or delayed by counting the number of clock select outputs (clock select may be by microseconds, milliseconds, emulator clocks, etc.). In addition, an output pulse may be generated, via the data acquisition interface, to trigger a logic analyzer or an oscilloscope.

The two event comparators (triggers) may be set to designate a break or halt in the program execution. These comparators may be used as independent breakpoints; or they may be used together to enable a breakpoint on a specific event combination. The program execution can be halted when

two trigger events occur simultaneously; when one trigger event precedes another; or when either trigger event occurs. When a break in the program execution takes place, program transactions stored in the real-time trace buffer may be displayed or printed.

Data stored in the real-time trace buffer is displayed sequentially in the order it was acquired from the prototype. Buffer content may be displayed in whole or in part. Optional command parameters are available to limit the storing of data to any specific transaction type, such as memory reads only. If the total buffer contents are displayed, a blank line will separate the data sequence associated with each program starting point.

The Real-Time Prototype Analyzer features a convenient and easy-to-understand display format. With this format, the address location, data, probe input, and control bus data of each acquired transaction are displayed. If the transaction was an instruction fetch, the instruction is also disassembled into the appropriate mnemonic read-out unique to the emulator type being used.

The Real-Time Prototype Analyzer functions in all emulation modes and operates with all commercial microprocessors supported by the 8002 and 8001 Microprocessor Labs.

REAL-TIME PROTOTYPE ANALYZER CHARACTERISTICS

OPERATIONAL SPEED CHARACTERISTICS

Processor	Maximum Processor Clock Rate*
8085	3.125 MHz (internal clock)
8080	2.08 MHz
6800	1.00 MHz
Z80	4.00 MHz
TMS9900	3.33 MHz

*Maximum processor clock rate for Real-Time Prototype Analyzer operation.

INPUT/OUTPUT CHARACTERISTICS

Variable Threshold

Range	> +10 V dc to < -10 V dc
Preset TTL Voltage	+1.4 V dc \pm 200 mV
Event Trigger Out	High level voltage out (when $V_{cc} = \text{Min}$, $V_i = 0.5$, $R_o = 50 \Omega$ to GND) is > 2 V dc.


Adjustments—Variable Threshold may be adjusted from > +10 V dc to < -10 V dc with a screwdriver adjustment accessible at the rear panel of the Microprocessor Lab. This voltage must be monitored with a voltmeter having an input impedance of at least 10 M Ω .

Jumpers—With the internal jumper in position '0-3' the clock threshold is designated to be the same as channels 0-3. In position '4-7' the jumper designates the clock threshold to be the same as channels 4-7.

Cable Length — 50 cm (19.5 in).

ORDERING INFORMATION

Option Description	Factory Price	Field Number	Field Price
8001 Microprocessor Lab	\$7650		
Option 46 Real-Time Prototype Analyzer	+ \$1950	8001F46	\$2150
8002 Microprocessor Lab	\$9950		
Option 46 Real-Time Prototype Analyzer	+ \$1950	8002F46	\$2150

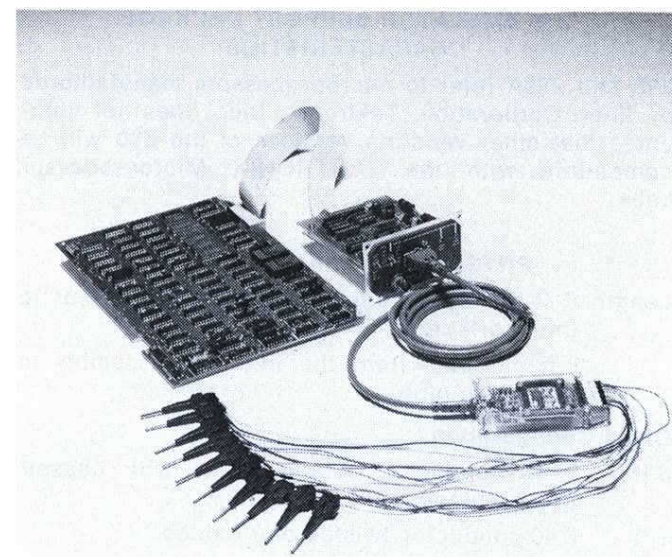

1702 and 2704/2708 PROM Programmer

The 1702 and 2704/2708 PROM Programmer, Options 47 and 48 for the 8002 and 8001 Microprocessor Labs, provide the ability to program either 1702 or 2704/2708 erasable PROM chips. When the module is installed in an 8002 or 8001 mainframe, the PROM Programmer software enables communication between 8002 or 8001 program memory and the PROM installed in the front-panel PROM programming porch.

1702 or 2704/2708 PROM Programmer software transfers one data byte at a time, and actual addresses are assigned. Data may be written from 8002 or 8001 program memory (WPROM); read from PROM into program memory (RPROM); or compared on the system terminal (CPROM).

The RPROM command allows the programmed PROM to be read into program memory and dumped to the system console. The CPROM compare function performs an address-by-address comparison between the PROM and the program under development. When an inequality between PROM bytes and memory bytes occurs, the memory address, memory byte content, and PROM byte content are displayed on the system console. A successful comparison between designated PROM and memory bytes is indicated by an End of Job message on the console.

ORDERING INFORMATION

Option Description	Factory Price	Field Number	Field Price
8001 Microprocessor Lab	\$7650		
Option 47 1702 PROM Programmer	+ \$500	8001F47	\$550
Option 48 2704/2708 PROM Programmer	+ \$500	8001F48	\$550
8002 Microprocessor Lab	\$9950		
Option 47 1702 PROM Programmer	+ \$500	8002F47	\$550
Option 48 2704/2708 PROM Programmer	+ \$500	8002F48	\$550



CT8100 Crt Terminal

The CT8100 Crt Terminal is an optional peripheral recommended for use with the 8002 and 8001 Microprocessor Labs.

The CT8100 is interfaced to the 8002 or the 8001 through an EIA standard RS-232-C port on the system communications module. Data formats and baud rate are switch-selectable for TTY or EIA operation.

The keyboard provides selection of the full ASCII set of 96 characters.

The console screen provides space for 24 lines of 80 characters each, allowing the 12-

inch diagonal, refreshed crt to display up to 1920 characters.

ELECTRICAL CHARACTERISTICS

115/230 (Hi, Medium, Lo) V ac,
50 to 400 Hz; nominal 220 W.

PHYSICAL CHARACTERISTICS

Dimensions	cm	in
Height	33.02	13
Width	45.72	18
Length	68.58	27
Weight	lb	
Net	46	
Shipping	67	

ORDERING INFORMATION

CT8100 Crt Terminal \$3495



LP8200 Line Printer

The LP8200 Line Printer is an optional system peripheral for the 8002 and 8001 Microprocessor Labs.

The LP8200 is serially interfaced to either Microprocessor Lab through an EIA standard RS-232-C port on the system communications module. Baud rates of 300 to 9600 are selectable.

The printout provides space for 132 characters/line, 6 lines/vertical inch. The full ASCII set of 96 upper/lower case characters is provided.

ELECTRICAL CHARACTERISTICS

Voltage 90 to 132 V ac or 180 to 264 V ac.
Frequency 50 or 60 Hz ± 1 Hz.
Power 400 W max (printing);
200 W max (idle).

PHYSICAL CHARACTERISTICS

Dimensions	cm	in
Height	85.09	33.5
Width	69.85	27.5
Length	55.12	21.7
Weight	lb	
Net	102	

ORDERING INFORMATION

LP8200 Line Printer \$3765

CT8101 Console Terminal

The CT8101 Console Terminal is an optional peripheral recommended for use with the 8002 and 8001 Microprocessor Labs.

The CT8101 is interfaced to the 8002 or 8001 through an EIA standard RS-232-C port on the system communications module. Data formats and baud rate are switch-selectable for TTY or EIA operation.

The keyboard provides selection of the full ASCII set of 96 characters. It also features character repeat when any key is pressed at the same time as the REPEAT key.

ELECTRICAL CHARACTERISTICS

Voltage	115 V RMS; +10%, -15%.
Frequency	47 through 63 Hz.
Power	75 W max.

PHYSICAL CHARACTERISTICS

Dimensions	cm	in
Height	10.79	4.25
Width	37.08	14.60
Length	38.73	15.25
Weight	lb	
Net	11.20 (including paper)	

ORDERING INFORMATION

CT8101 Console Terminal \$1395



**8001 and 8002 Microprocessor Lab
Ordering Information**

Option Description			Factory Price	Field Number	Field Price
8001 Microprocessor Lab			\$7650		
Select one with initial order	Option 01	8080 Microprocessor Support Package	NC	8001F01	\$2950
	Option 02	6800 Microprocessor Support Package	NC	8001F02	\$2950
	Option 03	Z80 Microprocessor Support Package	NC	8001F03	\$2950
	Option 04	TMS9900 Microprocessor Support Package	+\$ 400	8001F04	\$3350
	Option 05	8085 Microprocessor Support Package	NC	8001F05	\$2950
	Option 46	Real-Time Prototype Analyzer	+\$1950	8001F46	\$2150
	Option 47	1702 PROM Programmer	+\$ 500	8001F47	\$ 550
	Option 48	2704/2708 PROM Programmer	+\$ 500	8001F48	\$ 550
	Option 49	16K Memory Module	+\$1100	8001F49	\$1210
	8002 Microprocessor Lab			\$9950	
Select two with initial order	Option 01	8080 Assembler Software Support	NC	8002F01	\$ 550
	Option 02	6800 Assembler Software Support	NC	8002F02	\$ 550
	Option 03	Z80 Assembler Software Support	NC	8002F03	\$ 550
	Option 04	TMS9900 Assembler Software Support	NC	8002F04	\$ 550
	Option 05	8085 Assembler Software Support	NC	8002F05	\$ 550
	Option 16	8080 Emulator Support	+\$1850	8002F16	\$1950
	Option 17	6800 Emulator Support	+\$1850	8002F17	\$1950
	Option 18	Z80 Emulator Support	+\$1850	8002F18	\$1950
	Option 19	TMS9900 Emulator Support	+\$2100	8002F19	\$2200
	Option 20	8085 Emulator Support	+\$1850	8002F20	\$1950
	Option 31	8080 Prototype Control Probe	+\$ 850	8002F31	\$ 950
	Option 32	6800 Prototype Control Probe	+\$ 850	8002F32	\$ 950
	Option 33	Z80 Prototype Control Probe	+\$ 850	8002F33	\$ 950
	Option 34	TMS9900 Prototype Control Probe	+\$1000	8002F34	\$1100
	Option 35	8085 Prototype Control Probe	+\$ 850	8002F35	\$ 950
	Option 46	Real-Time Prototype Analyzer	+\$1950	8002F46	\$2150
	Option 47	1702 PROM Programmer	+\$ 500	8002F47	\$ 550
	Option 48	2704/2708 PROM Programmer	+\$ 500	8002F48	\$ 550
	Option 49	16K Memory Module	+\$1100	8002F49	\$1210
	Peripherals				
CT8100	Crt Terminal	\$3495			
CT8101	Console Terminal	\$1395			
LP8200	Line Printer	\$3765			

Alphanumeric Index

Type	Instrument Description	Page	Type	Instrument Description	Page
7A11	Single-Trace Amplifier	64	475A, R475A	250-MHz Dual-Trace Oscilloscopes	102
7A13	Differential Comparator Amplifier	65	485, R485	350-MHz Dual-Trace Oscilloscopes	100
7A15A	Single-Trace Amplifier	64	491, R491	10-MHz to 40-GHz Spectrum Analyzers	187
7A16A	Single-Trace Amplifier	64	576	Semiconductor Curve Tracer	202
7A16P	Programmable Vertical Amplifier	193	577/D1	Storage Curve Tracer Mainframe	206
7A17	Single-Trace Amplifier	64	577/D2	Curve Tracer Mainframe	206
7A18	Dual-Trace Amplifier	66	602	Display Monitor	224
7A19	Single-Trace Amplifier	64	604A	Low Cost Display Monitor	221
7A21N	Direct Access Unit	65	606A	High Resolution Display Monitor	220
7A22	Differential Amplifier	65	607A	Variable Persistence Display Monitor	223
7A24	Dual-Trace Amplifier	66	608	High Brightness Display Monitor	219
7A26	Dual-Trace Amplifier	66	611, 611-2	Storage Display	140
7B50A	Time Base	67	613	Storage Display	140
7B53A	Dual Time Base	67	624	Display Monitor	218
7B80	Time Base	68	634	Raster Scan Display Monitor	217
7B85	Delaying Time Base	68	851	Digital Tester	129
7B90P	Programmable Time Base	193	1101	Probe Power Supply	239
7B92A	Dual Time Base	69	1105	Battery Power Supply	128, 168
7CT1N	Plug-in Curve Tracer	70, 212	1106	Battery Pack	128
7D01, 7D01F	Logic Analyzer	21	1140A	Programmable Power Supply	200
7D10, 7D11	Digital Delay Units	23, 71	1340	Data Coupler	200
7D12	A/D Converter	72	1401A, 1401A-1	1-MHz to 500-MHz Spectrum Analyzers	188
7D13	Digital Multimeter	73	1405	Television Side-Band Adapter	186
7D14	Digital Counter	74	1502, 1503	TDR Cable Tester	170
7D15	Universal Counter/Timer	74	2701	50-Ω Step Attenuator	186
7K11	CATV Preamplifier	186	2703	75-Ω Step Attenuator	186
7L5	Spectrum Analyzer	182	4006-1	Computer Display Terminal	14d
7L12	Spectrum Analyzer	180	4010-1	Computer Display Terminal	14e
7L13	Spectrum Analyzer	178	4012	Computer Display Terminal	14f
7L18	Spectrum Analyzer	176	4013	Computer Display Terminal	14f
7M11	Dual Delay Line	76	4014-1	Computer Display Terminal	14g
7M13	Readout Unit	70	4015-1	Computer Display Terminal	14g
7S11	Sampling Unit	76	4023	Computer Display Terminal	14l
7S12	TDR/Sampler	77	4024	Computer Display Terminal	14b, 14c
7S14	Dual-Trace Sampling Unit	80	4025	Computer Display Terminal	14, 14a
7T11	Sampling Sweep Unit	77	4051	BASIC Computing System	14h
3	TEK Lab Cart	165, 256	4081	Interactive Graphics Terminal	14i
7	TEK Rack Cart	165, 258	4631	Hard Copy Unit	14k
31	Programmable Calculator	149	4632	Video Hard Copy Unit	14l
109	250-ps Fast-rise Pulse Generator	169	4662	Interactive Digital Plotter	14j
134	Current Probe Amplifier	242	4907	File Manager	14m
172	Programmable Test Fixture	204	4923	Digital Cartridge Tape Recorder	14d
176	Pulsed High-Current Fixture	205	4931	Modem	14d
177	Standard Test Fixture	206	5110, R5110	2-MHz Single-Beam Oscilloscopes	90, 91
178	Linear IC Test Fixture	208	5111, R5111	2-MHz Single-Beam Storage Oscilloscopes	90, 91
200-C	SCOPE-MOBILE® Cart	257	5112, R5112	2-MHz Dual-Beam Oscilloscopes	90, 91
205	SCOPE-MOBILE® Cart	257	5113, R5113	2-MHz Dual-Beam Storage Oscilloscopes	90, 91
206	SCOPE-MOBILE® Cart	257	5115, R5115	2-MHz Single-Beam Storage Oscilloscopes	90, 91
209	Scope Stand	128	5440, R5440	60-MHz Single-Beam Oscilloscopes	85
212	500-kHz Dual-Trace Oscilloscope	120	5441, R5441	60-MHz Variable Persistence Storage Oscilloscopes	86
213	DMM Oscilloscope	118	7313, R7313	Bistable Storage Oscilloscopes	61, 62
214	500-kHz Dual-Trace Storage Oscilloscope	120	7603, R7603	100-MHz Oscilloscopes	52
221	5-MHz Portable Oscilloscope	117	7603N11S	Ruggedized Oscilloscope System	53
284	70-ps Fast-rise Pulse Generator	169	7613, R7613	Variable Persistence Storage Oscilloscopes	60
286	Sampling Head Multiplexers	200	7623A, 7633	Multimode Storage Oscilloscopes	58
314	Dual-Trace Storage Oscilloscope	116	R7623A, R7633	Multimode Storage Oscilloscopes	59
323	4-MHz Oscilloscope	115	7704A, R7704	250-MHz Oscilloscopes	50
326	10-MHz Dual-Trace Oscilloscope	114	7834	Fast Storage Oscilloscope	56
335	35-MHz Dual-Trace Oscilloscope	112	7844, R7844	400-MHz Dual-Beam Oscilloscopes	48
400	Recorder	214	7904, R7903	500-MHz Oscilloscopes	46
401	Digital Readout Module	214	7912AD	Programmable Digitizer	193
408	Portable Patient Monitor	214	R7912	Transient Digitizer	193
412	Portable Patient Monitor	214	8001	Microprocessor Lab	31
413	Neonatal Patient Monitor	213	8002	Microprocessor Lab	30
414	Portable Patient Monitor	213			
434, R434	25-MHz Bistable Storage Oscilloscopes	110			
455	50-MHz Dual-Trace Oscilloscope	106			
464	100-MHz Portable Storage Oscilloscope	108			
465, R465	100-MHz Dual-Trace Oscilloscopes	102			
465M	100-MHz Dual-Trace Oscilloscope	104			
466	100-MHz Portable Storage Oscilloscope	108			
475, R475	200-MHz Dual-Trace Oscilloscopes	102			

International Field Offices, Distributors, and Representatives

ALGERIA

Measurelec
144 Bd Salah Bouakour
Algiers
Phone: 60 45 70 and 60 45 71
(Algiers)
Telex: (Private telex is not available today)
Cable: (Address as above)

ARGENTINA

Coasin S.A.
Virrey del Pino 4071
Buenos Aires
Phone: 52-3185, 51-9363
Telex: 012-2284
Cable: COASIN, Buenos Aires
25 de Mayo N° 1930
Cordoba
Phone: 51-3037

AUSTRALIA

Tektronix Australia Pty. Limited
80 Waterloo Road
North Ryde, N.S.W. 2113
Sydney
Phone: 888-7066
Telex: AA24269
Cable: TEKTRONIX Australia
128 Gilles Street
Adelaide, South Australia 5000
Phone: 223-2811
260 Auburn Road
Hawthorn, Vic. 3122
Melbourne
Phone: 81 0594

AUSTRIA

Rohde & Schwarz-Tektronix
Ges.m.b.H.
Sonnleithnergasse 20
A-1100 Wien
Phone: Vienna 62 61 41
Telex: Vienna 13933

BELGIUM

TEKTRONIX vn/sa
Mercure Centre
Rue De La Fusee NR100
1130 Bruxelles
Phone: 02/720 80 20
Telex: 26713
Cable: TEKBEL

BRAZIL

Tektronix Industria e Comercio Ltda.
Rua Franz Schubert 59
CEP 01454 Sao Paulo
Phone: 212-3608, 212-4874
Rua Barao de Lucena, 32
CEP 20000 Rio de Janeiro
Phone: 266-5364, 266-6946

CANADA

Tektronix Canada Ltd.
P.O. Box 6500 (Home Office)
Barrie, Ontario
L4M 4V3
Phone: (705) 737-2700
Telex: 06-875672
Cable: TEKANADA

FIELD OFFICES:

(Montreal)
900 Selkirk Street
Pointe Claire, Quebec
H9R 3S3
Phone: (514) 697-5340
Telex: 05-821570
Cable: TEKANADA

825 - 12th Avenue S.W.
Calgary, Alberta
T2R 0J2
Phone: (403) 269-3138
Telex: 038-21730

6025 103 A Street
Edmonton, Alberta
T6H 2J7
Phone: (403) 434-9466
Telex: 037-2795

(Toronto)
P.O. Box 6500
Barrie, Ontario
L4M 4V3
Phone: (705) 737-2700
Telex: 06-875672
Cable: TEKANADA

1792 Courtwood Crescent
Ottawa, Ontario
K2C 2B5
Phone: (613) 225-2850
Telex: 053-4119

(Vancouver)
4519 Canada Way
Burnaby, B.C.
V5G 1K1
Phone: (604) 438-4321
Telex: 043-54602

(Halifax)
Burnside Commercial Centre
10 Akerley Blvd.
Dartmouth, Nova Scotia
B3B 1J4
Phone: (902) 469-9476
Telex: 019-22656

CHILE

Equipos Industriales S.A.C.I.
Moneda 812 - Of. 912
(Casilla 13550)
Santiago
Phone: 716-882, 382-942
Telex: 3520241 FLOBRA
Cable: FLOBRA, Santiago

COLOMBIA

Selectronica Ltda.
K. 71 No. 55-98
Apartado Aereo 25124
Bogota, D.E.
Phone: 632874, 422376

DENMARK

Tektronix A/S
Herlev Hovedgade 119
Post Box 575
DK-2730 Herlev
Phone: (02) 84 56 22
Telex: 35239 Tekas dk

EAST AFRICA (Kenya, Tanzania and Uganda)

Engineering & Sales Co., Ltd.
Bankhouse, Government Road
(P.O. Box 46658)
Nairobi, Kenya
Phone: 26815
Cable: ENGSALSA Nairobi

ECUADOR

Proteco Coasin Cia Ltda.
Ave. 6 de Diciembre 865 y Roca
(P.O. Box 228A)
Quito
Phone: 52-6759, 52-9684
Telex: 2865 PROTECO-ED
Cable: PROTECO, Quito

EGYPT

Giza Systems Engineering
Company
P.O. Box 1913
4 E1-Hesn Street
Giza
Cairo
Phone: 98 7114, 98 7276

EL SALVADOR

Electronica Cuscatleca,
S.A. de C.V.
21 Avenida Norte No. 1334
San Salvador
Phone: 25-1783, 26-1867

FEDERAL REPUBLIC OF GERMANY

Rohde & Schwarz
Vertriebs GmbH
Grosse Bergstrasse 213
2000 Hamburg 50
Phone: (040) 38 01 91
Telex: 213 749
Cable: ROHDESCHWARZ Hamburg
Kriegstrasse 39
7500 Karlsruhe
Phone: (0721) 2 79 81
Telex: 7 826 730
Cable: ROHDESCHWARZ Karlsruhe
Sedanstrasse 13-17
5000 Köln 1
Phone: (0221) 77 22-1
Telex: 888-5417
Cable: ROHDESCHWARZ Köln

FINLAND

Into O/Y
P.O. Box 22
SF-00661 Helsinki 66
Phone: 90-742133
Telex: 121836
Cable: INTO, Helsinki
Technisches Büro
Pieninger Strasse 150
7000 Stuttgart 80
Phone: (0711) 72 20 39
Telex: 0725533

FRANCE

TEKTRONIX
Z. I. Courtaboeuf, B.P. 13
91401 Orsay
Phone: 907 78 27
Telex: TEKFRANS 690332
Cable: TEKFRANS Orsay
Centre Regional de Lyon
163, Boulevard des Etats-Unis
69008 Lyon
Phone: (78) 76 40 03
Telex: TEKL YON 300150

Centre Regional de Nancy
16, rue de la Cote
54000 Nancy
Phone: (28) 96 24 98
Telex: TEKNANCY 850872

Centre Regional d'Aix-en-Provence
Rue Le Corbusier
13100 Aix-en-Provence
Phone: (42) 59 24 66
Telex: TEKAIX 440045

Centre Regional de Rennes
103A, avenue de Crimée
35000 Rennes
Phone: (99) 51 21 16
Telex: TEKREN 740829

Centre Regional de Strasbourg
1 Rue du Marechal Lefebvre
67100 Strasbourg
Phone: (88) 39 49 35
Telex: TEKSTBG 890470

Centre Regional de Toulouse
284, route Saint-Simon
31300 Toulouse
Phone: (61) 40 24 50
Telex: TEKTOLS 530243

GREECE

Marios Dalleggio
Representations
2, Alopekis Street
Athens 139
Phone: 710.669, Telex: 216435
Telex Answer Code: DALM GR
Cable: DALMAR Athens

HONG KONG

Gilman & Co. Ltd.
Electrical/Electronic Dept.
280 Gloucester Road
World Trade Centre, 24/F.
Causeway Bay
(G.P.O. Box 56)
Phone: 5-794266
Telex: 83667 GILMN HX
Cable: GILMAN, Hong Kong

INDIA

Hinditron Services Private Ltd.
69-A, L. Jagmohandas Marg.
Bombay-400 006
Phone: 365344
Telex: 953-0112326
Cable: TEKHIND, Bombay
412 Raj Mahal Vilas Extension
Bangalore-560 006
Phone: 33139
Telex: 953-043-741
Cable: TEKHIND, Bangalore

INDONESIA

P.T. Dwi Tunggal Jaya Sakti
Jl. Pintu Air No. 9
Jakarta
Phone: 366369
Cable: CVDWITDJAJA

IRAN

Irantronix Company Ltd.
20 Salm Road
Roosevelt Avenue
Tehran
Phone: 828294, 831564, 836466,
834459
Telex: 212956 BERK IR
Cable: BERKEHKAR, Tehran

ISRAEL

Eastronics Ltd.
11 Rozanis Street
Tel-Baruch
(P.O. Box 39300)
Tel Aviv
Phone: 475151
Telex: 033-638
Cable: EASTRONIX Tel Aviv

ITALY

Silverstar Spa, Ltd.
Via del Gracchi No. 20
20146 Milano
Phone: 4996 (12 lines)
Telex: 39189 SILSTAR Milano
Cable: SILVERSTAR Milano
Via Paisiello No. 30
00198 Roma
Phone: 844 88.41/5 (five lines)
Telex: 61511 SILSTAR Roma
Cable: SILVERSTAR Roma
Piazza Adriano, 9
10139 Torino
Phone: 44 32 75/6
Cable: SILVERSTAR Torino

IVORY COAST

SITEL
Societe Ivoirienne de
Telecommunication
20 Avenue de la fosse
BP 2580
Abidjan (cote d'Ivoire)
Ivory Coast
Phone: 32 18 52 & 32 14 75
Telex: 525 RAYBACH-ABIDJAN

JAPAN

Sony/Tektronix Corporation
9-31, Kitashinagawa - 5, Shinagawa-Ku
Tokyo 141
(P.O. Box 14, Haneda Airport,
Tokyo 149)
Phone: 445-0221 (Area 03/Tokyo)
Telex: 02422850
Cable: SONYTEK Tokyo
c/o Taiso-Ebisu Building 1-6-11
Ebisuminami Shibuya-ku
Tokyo 150
Phone: 710-8141 (area 03/Tokyo)
c/o Takahashi Building North No. 2
2-19 Isemachi Kita-ku
Osaka-shi 530
Phone: 312-2751 (area 06/Osaka)
8 Hijie-cho-2 Nakamura-ku
Nagoya
Phone: 581-3548 (area 052/Nagoya)

JORDAN

TAREQ Scientific Bureau
Salt Road
P.O. Box 463
Amman
Phone: 36855 & 22855
Telex: 1611 ADER JO
Cable: ADERDRUG AMMAN

KOREA

M-C International (Korea) Ltd.
Room 1407, Center Building
91-1 Sokong-dong Chung-ku
(C.P.O. Box 1355)
Seoul
Phone: 23-4101/5
Telex: K24228
Cable: EMCEE, Seoul

KUWAIT

TAREQ Company
P.O. Box Safat 20506
Phone: 436100 & 436045
Telex: 2315 ZUAITER KT
Cable: ZUAITER KUWAIT

LEBANON

Projects S.A.L.
(P.O. Box 5281)
Beirut
Phone: 251680
Telex: 20466LE
Cable: PROJECTS Beirut

MALAYSIA

Mecomb Malaysia Sdn. Bhd.
No. 2, Lorong 13/6A
(P.O. Box 24)
Petaling Jaya, Selangor
Phone: 773455
Telex: 37605
Cable: MECOMB Petaling Jaya

MEXICO

Tecnicos Argostal, S.A.
Depto. Control de Calidad
Av. Jalisco 180
(Apdo. Postal M-2511, Mexico 1, D.F.)
Mexico 18, D.F.
Phone: 515-85-80
Telex: 017-74208
Cable: ARGOSTAL, Mexico
Av. Universidad 3335 Norte
Monterrey, N.L.
Phone: 51-13-60
Telex: 038865
Calz. J. Jesus Glz. Gallo 383
Guadalajara, Jal.
Phone: 17-26-46, 17-78-12
Telex: 068-2710

MOROCCO

SCRIM
29 BD Girardot
Casablanca
Phone: 27 69 11
Telex: 21815
Cable: SCRIM CASA (21815)

NEW ZEALAND

W. & K. McLean Ltd.
103-105 Felton Mathew Avenue
Glen Innes
(C.P.O. Box 3097)
Auckland 6
Phone: 587-037
Telex: NZ 2763 KOSFY
Cable: KOSFY, Auckland
5th Floor, Westbrook House
181 Willis Street
(C.P.O. Box 496)
Wellington 1
Phone: 851 450
Telex: NZ 3053 KOSFY

2nd Floor, McLean Building
210 Oxford Terrace
(C.P.O. Box 2421)
Christchurch 1
Phone: 64-403

NIGERIA

Mofat Engineering Co. Ltd.
P.O. Box 6369
89 Wakeman Street
Yaba
Lagos
Phone: 43195
Telex: 21595 Mainlang
Cable: MOFATENG, LAGOS
SWB/131 Ijebu Bye-pass
Oke-Ado
P.O. Box 3464
Ibadan
Phone: 22824

NORWAY

Morgenstjerne & Co. A/S
Konghellegt 3
(P.O. Box 6688 Rodelokka, Oslo 5)
Oslo
Phone: 35 61 10
Telex: 11719
Cable: MOROF Oslo

PAKISTAN

Pak-Land Corporation
Central Commercial Area
Iqbal Road
P.E.C.H. Society
Karachi-29
Phone: 437315, 438084
Cable: PAKLAND, Karachi

PANAMA

Executive Marketing Corporation
Apartado 4929
Panama 5
Phone: 64-9354, 64-9851
Telex: 328-2220
Cable: MARKETING PA, Panama

PERU

Importaciones y
Representaciones
Electronicas S.A.
(IRE Ingenieros)
Avda. Franklin D. Roosevelt 105
Edificio Rimac
Lima
Phone: 28-86-50
Telex: 25663
Cable: IREING, Lima

PHILIPPINES

Philippine Electronic
Industries, Inc.
3rd Floor, RCA Global Building
8755 Paseo de Roxas
(P.O. Box 498, Makati Commercial
Center)
Makati, Rizal 3117
Phone: 87-99-26, 87-99-27, 87-99-28
Telex: 7222036
Cable: PHILECTRON, Manila

PORTUGAL

Equipamentos de
Laboratorio Lda.
Estrada Lisboa - Sintra Amadora
P.O. Box 1100 (Casal de Garoto)
Lisbon
Phone: 97 65 51
Telex: 12702 EQUILAB
Cable: EQUILAB, Lisboa

REPUBLIC OF SOUTH AFRICA

Protea Physical & Nuclear
Instrumentation (Pty.) Ltd.
P.O. Box 39127
Bramley 2018
746 Sixth Street
Wynberg, Standton
Transvaal
Phone: (27 11) 786-3647
Telex: 8-4689

P.O. Box 141
Paardenland 7420
30 Auckland Street
Paardenland (Cape Town Branch)
Phone: 51-3247
Telex: 5-77551

P.O. Box 47031
Greville 4025
116 Stamford Hill Road
Durban
Phone: 39-1100
Telex: 6-2775

SAUDI ARABIA

Electronic Equipment Marketing
Establishment
P.O. Box 3750
Riyadh
Phone: 32700, 32761
Telex: 20120

SINGAPORE

Mechanical & Combustion
Engineering Co. Pte. Ltd.
10-12, Jalan Kilang
(P.O. Box 46, Alexandra Post Office)
Singapore 3
Phone: 647151
Telex: RS-23178
Cable: MECOMB, Singapore

SPAIN

C.R. Mares, S.A.
Valencia 333
Barcelona (9)
Phone: 257 62 00
Telex: 27332
Cable: MARES Barcelona
Gaztambide, 60-1°
Madrid (15)
Phone: 449-33-00
Telex: 7332
Cable: MARES Madrid

SRI LANKA

Maurice Roche Limited
G.P.O. Box 61
Colombo
Phone: 25846, 25847, 25848
Cable: LAXAPANA, Colombo

SUDAN

Cine & Photo Supply
Company (CPS)
P.O. Box 393
Khartoum
Phone: 75162, 76943 and 42478
Telex: 304 Photokina
Cable: PHOTOKINA

SURINAME

Wong Sang Tsoi & Co.
20-24 Dominestraat
(P.O. Box 163)
Paramaribo
Phone: 73511, 75187, 72154, 76369
Cable: SANGTSOICO, Paramaribo

SWEDEN

Tektronix AB
Fack
S-171 04 Solna
Phone: 08/83 00 80
Telex: 17831 Tekswed S
Cable: TEKTRSWED Stockholm
Kommendorgatan 6
S-414 59 Gothenburg
Phone: 031/42 70 35

SWITZERLAND

Tektronix International A.G.
(P.O. Box 57)
CH-6301 Zug
Phone: 042 21 91 92
Telex: 78508
Cable: TEKINTAG

SYRIA

General Trading Company
P.O. Box 798
Damascus
Phone: 114807, 224170, 559108
Telex: 11283 GITCO SY

TAIWAN

Heighten Trading Co. Ltd.
16 Nanking East Road, Section 3
(P.O. Box 1408)
Taipei 104 ROC
Phone: 551-9916
Telex: 21472
Cable: HEIGHTEN, Taipei

THAILAND

G. Simon Radio Company Ltd.
30, Patpong Avenue
Bangkok
Phone: 30991-3
Cable: SIMONCO, Bangkok

THE NETHERLANDS

Tektronix Holland N.V.
Meidoornweg 2
"Postbus 164"
Badhoevedorp
Phone: 02968-6155
Telex: 18490

TURKEY

Erkman Elektronik Aletler
Ticaret Anonim Sirketi
Necatibay Caddesi 92/3
Karakoy, Istanbul
Phone: 44 15 46/44 76 51
Telex: 23353 MSE TR
Cable: INGMESUER, Istanbul

TUNISIA

EL ESLEK
Societe Industrielle et
Commerciale d'Equipements
Electriques et Electroniques
3 Rue de Vesoul
Tunis
Phone: 244372
Telex: 13664 ESLEK TN

UNITED ARAB EMIRATES

Contact TAREQ Company, Kuwait

UNITED KINGDOM

Tektronix U.K. Limited
Beaverton House
36-38, Coldharbour Lane
(P.O. Box 69)
Harpندن, Herts
Phone: Harpenden 63141, 61251
Telex: 25559
Cable: TEKTRONIX Harpenden
181A, Mauldeth Road
Barnage
Manchester 19
Phone: 061-224-0446
Telex: 668409
7 Shiel House, Shiel Walk
Scotland
Livingston, West Lothian
Phone: Livingston 32766/7

URUGUAY

Coasin Uruguay S.R.L.
Casilla de Correo No. 1400
Correo Central
Montevideo
Phone: 91-79-78
Cable: COAUR, Montevideo

VENEZUELA

Equilab, C.A.
Torre KLM 6° Piso
Avda. Romulo Gallegos
Santa Eduvigis
(Apartado 63497)
Caracas 106
Phone: 283.1166 (5 lines)
Telex: 21860 EQUIX
Cable: EQUILAB, Caracas

WEST BERLIN

Rohde & Schwarz
Handels-GmbH
Ernst-Reuter-Platz 10
1000 Berlin 10
Phone: (030) 3 41 40 36
Telex: 0 181 836
Cable: ROHDESCHWARZ Berlin

ZAMBIA

Baird and Tatlock (Zambia) Ltd.
Chandwe Musonda Road
(P.O. Box 1038)
Lusaka
Phone: 75315/6
Telex: 4277
Cable: PIPETTE, Lusaka
Brunell Road
(P.O. Box 1097)
Ndola
Phone: 3522 & 2253/4/6
Telex: 3441
Cable: PIPETTE, Ndola

Customers in the following countries:

Bulgaria, Czechoslovakia, Hungary, Poland,
Romania, USSR and Yugoslavia

Contact: Rohde & Schwarz-Tektronix Ges.m.b.H. & Co. KG
Sonnleithnergasse 20, A-1100 Wien, Austria. Phone Vienna 62 61 41, Telex Vienna 13933

Customers in other Europe, Middle East and African countries contact:
Tektronix Limited, P.O. Box 36, St. Peter Port, Guernsey, Channel Islands.
Phone Guernsey 35781, Telex 41193, Telegraph TEKTRONIX GUERNEY

Tektronix, Inc.

P.O. Box 500, Beaverton, Oregon 97077
Telephone: (503) 644-0161 TWX: 910-467-8708 TEKTRONIX BEAV. Cable: TEKTRONIX

FIELD ENGINEERING OFFICES

ALABAMA

***Huntsville** 35801
Suite 8, 3322 S. Memorial Parkway
Phone: (205) 881-2912

ARIZONA

***Phoenix** 85034
2643 E. University Drive
Suite 113
Phone: (602) 244-9795
Tucson Area: ENterprise 383

CALIFORNIA

***Concord** 94520
2345 Stanwell Circle
Phone: (415) 689-2710
From Oakland: (415) 254-5353

***Irvine** 92714
16601 Hale Ave.
Phone: (714) 556-8080-89
(213) 778-5225, 26

***(Los Angeles)**
21300 Erwin Street
Woodland Hills 91367
Phone: (213) 999-1711

****Los Gatos** 95030
985 University Avenue
Suite 22
Phone: (408) 358-3491

***San Diego** 92111
7827 Convoy Court
Suite 401
Phone: (714) 292-7330

***Santa Clara** 95051
3200 Coronado Drive
Phone: (408) 249-5500

COLORADO

***(Denver)**
Suite 4A
14 Inverness Dr. East
Englewood 80110
Phone: (303) 773-1011
Telex: (Infocom) 45-4455

CONNECTICUT

Milford 06460
20 Commerce Park Road
Phone: (203) 877-1494

FLORIDA

***Fort Lauderdale** 33311
1871 West Oakland Park Blvd.
Phone: (305) 731-1220
Also serves Puerto Rico and
U.S. Virgin Islands
From Miami: 947-6053

***Orlando** 32803
Suite 109, 1040 Woodcock Rd.
Phone: (305) 894-3911
From the Cape Kennedy Area:
636-0343

Pensacola 32503
Suite 130, 4900 Bayou Blvd.
Phone: (904) 476-1897

GEORGIA

***(Atlanta)**
3320 Holcomb Bridge Road
at Peachtree Industrial Blvd.
Norcross 30092
Phone: (404) 449-4770

HAWAII

Honolulu 96819
2979 Ualena Street
Phone: (808) 845-4531

†**Honolulu Service Center**

EMC Corporation
2979 Ualena Street
Phone: (808) 847-1138

ILLINOIS

***(Chicago)**
5350 Keystone Ct.
Rolling Meadows 60008
Phone: (312) 259-7580

INDIANA

***Indianapolis** 46219
6121 East 30th Street
Phone: (317) 545-2351

KANSAS

***(Kansas City)**
10580 Barkley
Suite 62
Overland Park 66212
Phone: (913) 341-3344

LOUISIANA

***(New Orleans)**
3004 34th St.
Metairie 70001
Phone: (504) 837-8454

MARYLAND

***(Baltimore)**
1526 York Road
Lutherville 21093
Phone: (301) 321-7000

***Rockville** 20850
2 Research Court
Phone: (301) 948-7151

MASSACHUSETTS

***(Boston)**
482 Bedford Street
Lexington 02173
Phone: (617) 861-6800

MICHIGAN

***(Detroit)**
25882 Orchard Lake Rd.
Farmington Hills 48018
Phone: (313) 478-5200

MINNESOTA

***St. Paul** 55112
3563 N. Lexington Ave.
Phone: (612) 484-8571

MISSOURI

***(St. Louis)**
422 Anglum Rd.
Hazelwood 63042
Phone: (314) 731-4696

NEW JERSEY

***Woodbridge** 07095
40 Gill Lane
Phone: (201) 636-8616

NEW MEXICO

***Albuquerque** 87108
1258 Ortiz Drive, S.E.
Phone: (505) 265-5541
Southern N.M. Area: ENterprise 678
Southern Nevada Area: ENterprise 678

NEW YORK

***(Albany)**
678 Troy Road
Latham 12110
Phone: (518) 785-3353

***(Long Island)**
100 Crossways Park West
Woodbury, L.I. 11797
Phone: (516) 364-9060
(212) 895-9215

Poughkeepsie 12603
31 Haight Avenue
Phone: (914) 454-7540

Rochester 14623
1210 Jefferson Rd.
Phone: (716) 244-2600

***(Syracuse)**
1 Northern Concourse
North Syracuse 13212
Phone: (315) 455-6661
From New York: (800) 962-1095

NORTH CAROLINA

***Raleigh** 27612
Suite 104
3725 National Dr.
Phone: (919) 782-5624

OHIO

***Cleveland** 44129
5689 Pearl Road
Phone: (216) 884-6558

***Dayton** 45449
501 Progress Rd.
Phone: (513) 859-3681

OKLAHOMA

Oklahoma City 73105
Suite 201
800 N.E. 63rd
Phone: (405) 848-3361

OREGON

***(Portland)**
7000 S.W. Hampton St.
Suite 121
Tigard 97223
Phone: (503) 620-9100

†**Factory Service Center**

Tektronix Industrial Park
Beaverton 97077
Phone: (503) 644-0161
TWX: 910-467-8708

PENNSYLVANIA

***(Philadelphia)**
1720 Walton Road
Blue Bell 19422
Phone: (215) 825-6400
From Harrisburg, Lancaster, and
York Area: ENterprise 1-0631

***(Pittsburgh)**
3834 Northern Pike
Monroeville 15146
Phone: (412) 373-3250

TEXAS

***Dallas** 75240
4455 Sigma Road
Phone: (214) 233-7791

***Houston** 77036
5755 Bonhomme
Suite 420
Phone: (713) 783-1910

San Antonio 78226
3311 Roselawn
Phone: (512) 434-4334

UTAH

***Salt Lake City** 84115
65 West 2950 South
Phone: (801) 484-8501

VIRGINIA

Hampton 23666
1929 C Coliseum Dr.
Phone: (804) 826-4020

WASHINGTON

***Seattle** 98188
641 Industry Drive
Phone: (206) 575-0180

***Field Office/Service Center**
****Regional Office**
†**Service Center**

Technological innovation. Since the introduction of its first pioneering laboratory oscilloscope in 1947, Tektronix has been committed to advancing the state of technology. The 7834 was chosen by *Industrial Research* magazine as one of the top 100 technological innovations in 1977. It's the world's fastest storage oscilloscope. And the only scope that can retain waveforms of very fast, single-shot events (up to 1.4 nsec rise time) typical of nuclear research, laser fusion, and glitches in digital logic circuitry. The scope's biggest users are nuclear-energy researchers and computer people. See pages 56 and 57.




Our 1500-Series Cable Testers are valued by users including airlines and telephone companies. The 1500s provide maintenance people with a fast, accurate, portable tool for checking the internal condition of cables and pinpointing problems. Maintenance people can identify and locate opens and metallic shorts, as well as crimps, frays, and poor connections in coax. In telephone cables, they can also see splices, sheath damage, water, splits and resplits, load coils, bridged taps and other kinds of trouble. The 1500-Series Cable Testers are simple to operate and can be used on everything from coax to lamp cord. See pages 170 and 171.




The TV broadcasting industry around the world knows Tektronix for a wide range of instruments that help maintain the quality of television transmission from the camera to the home receiver. Applications of these instruments beyond the television broadcast industry are as varied as NASA Control's elaborate system that enabled us to see man take his first step on the moon to the production of video tapes that record what a physician sees through a bronchoscope. The Grass Valley Group subsidiary of Tektronix is also well known for television broadcast products – especially its production and routing switchers, which are used in program editing and for special effects. See pages 173 and 174.




The broadest line of portable scopes in the industry means you can pick and choose from 22 high-performance models. They can be found servicing computers, helping teach basic electronics to students, repairing business systems, and checking completed products on the production line. In integrated circuit manufacturing, TEKTRONIX Portable Oscilloscopes are used to maintain the ion implanters used in making ICs. Our business is supplying the model you need to go where you go. See pages 97 through 128.

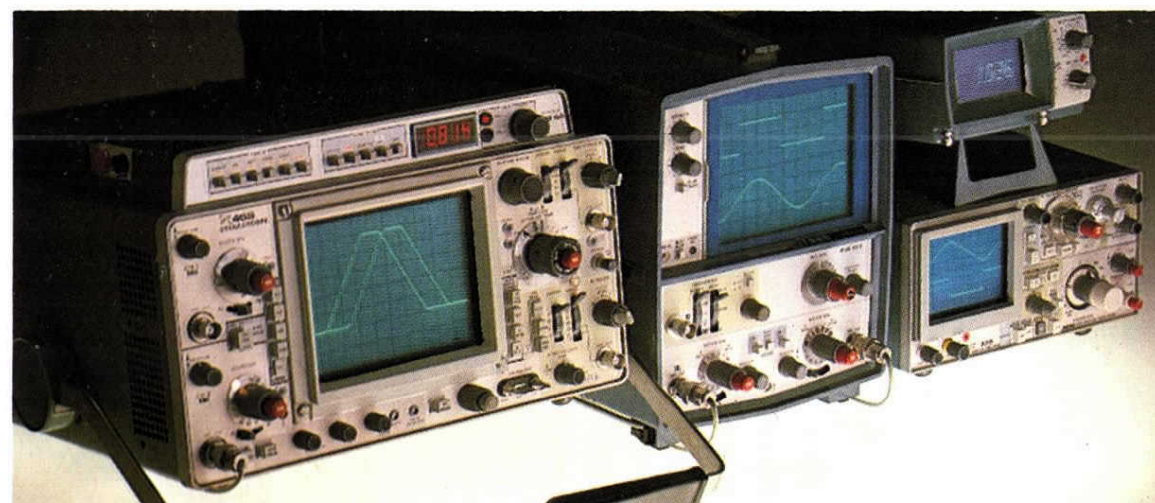


Tektronix[®]
COMMITTED TO EXCELLENCE

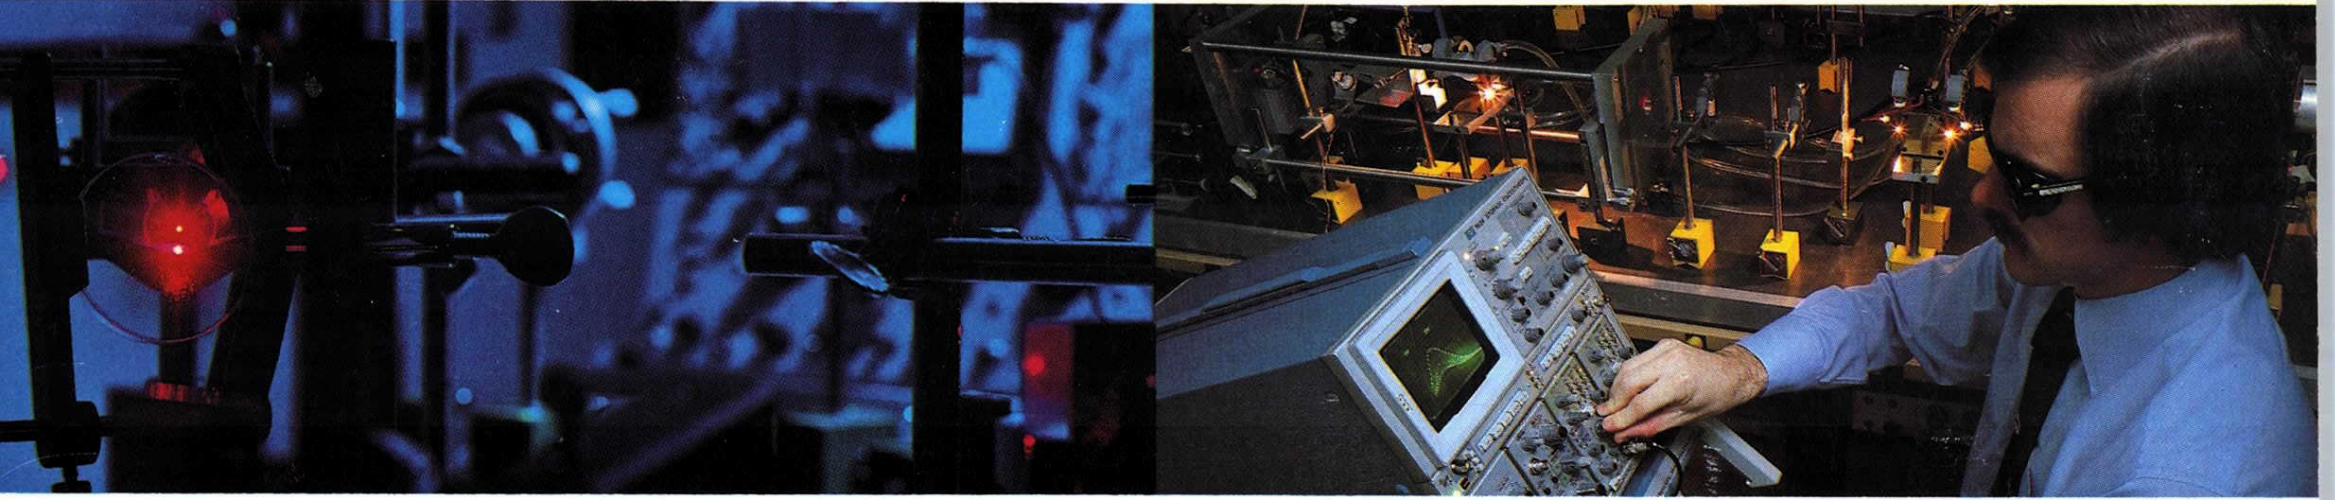

Fast scopes are needed to advance the state of technology

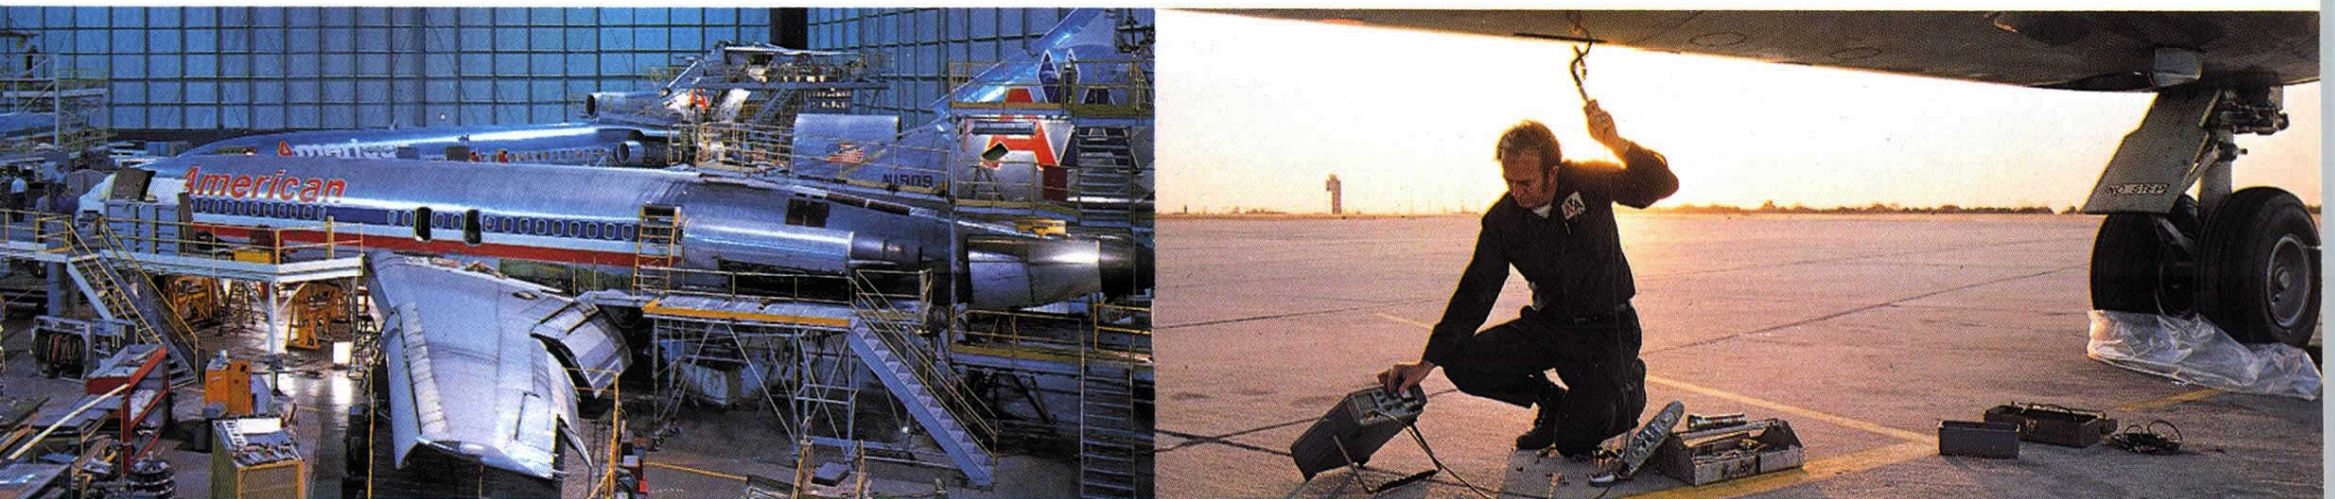

Cable testing means finding cable disturbances quickly

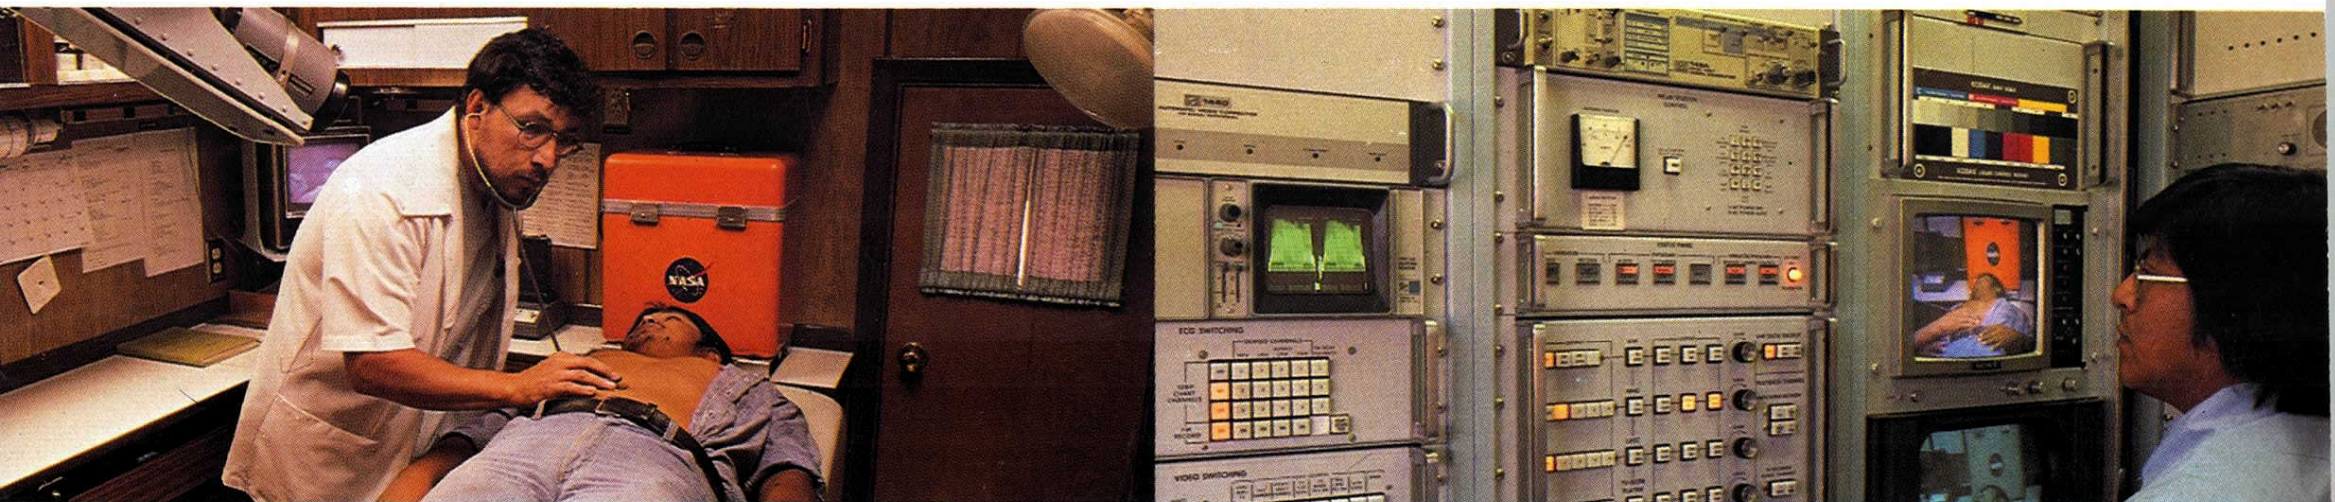

Video communications help provide health care to remote areas



Portable scopes meet on-the-spot servicing needs