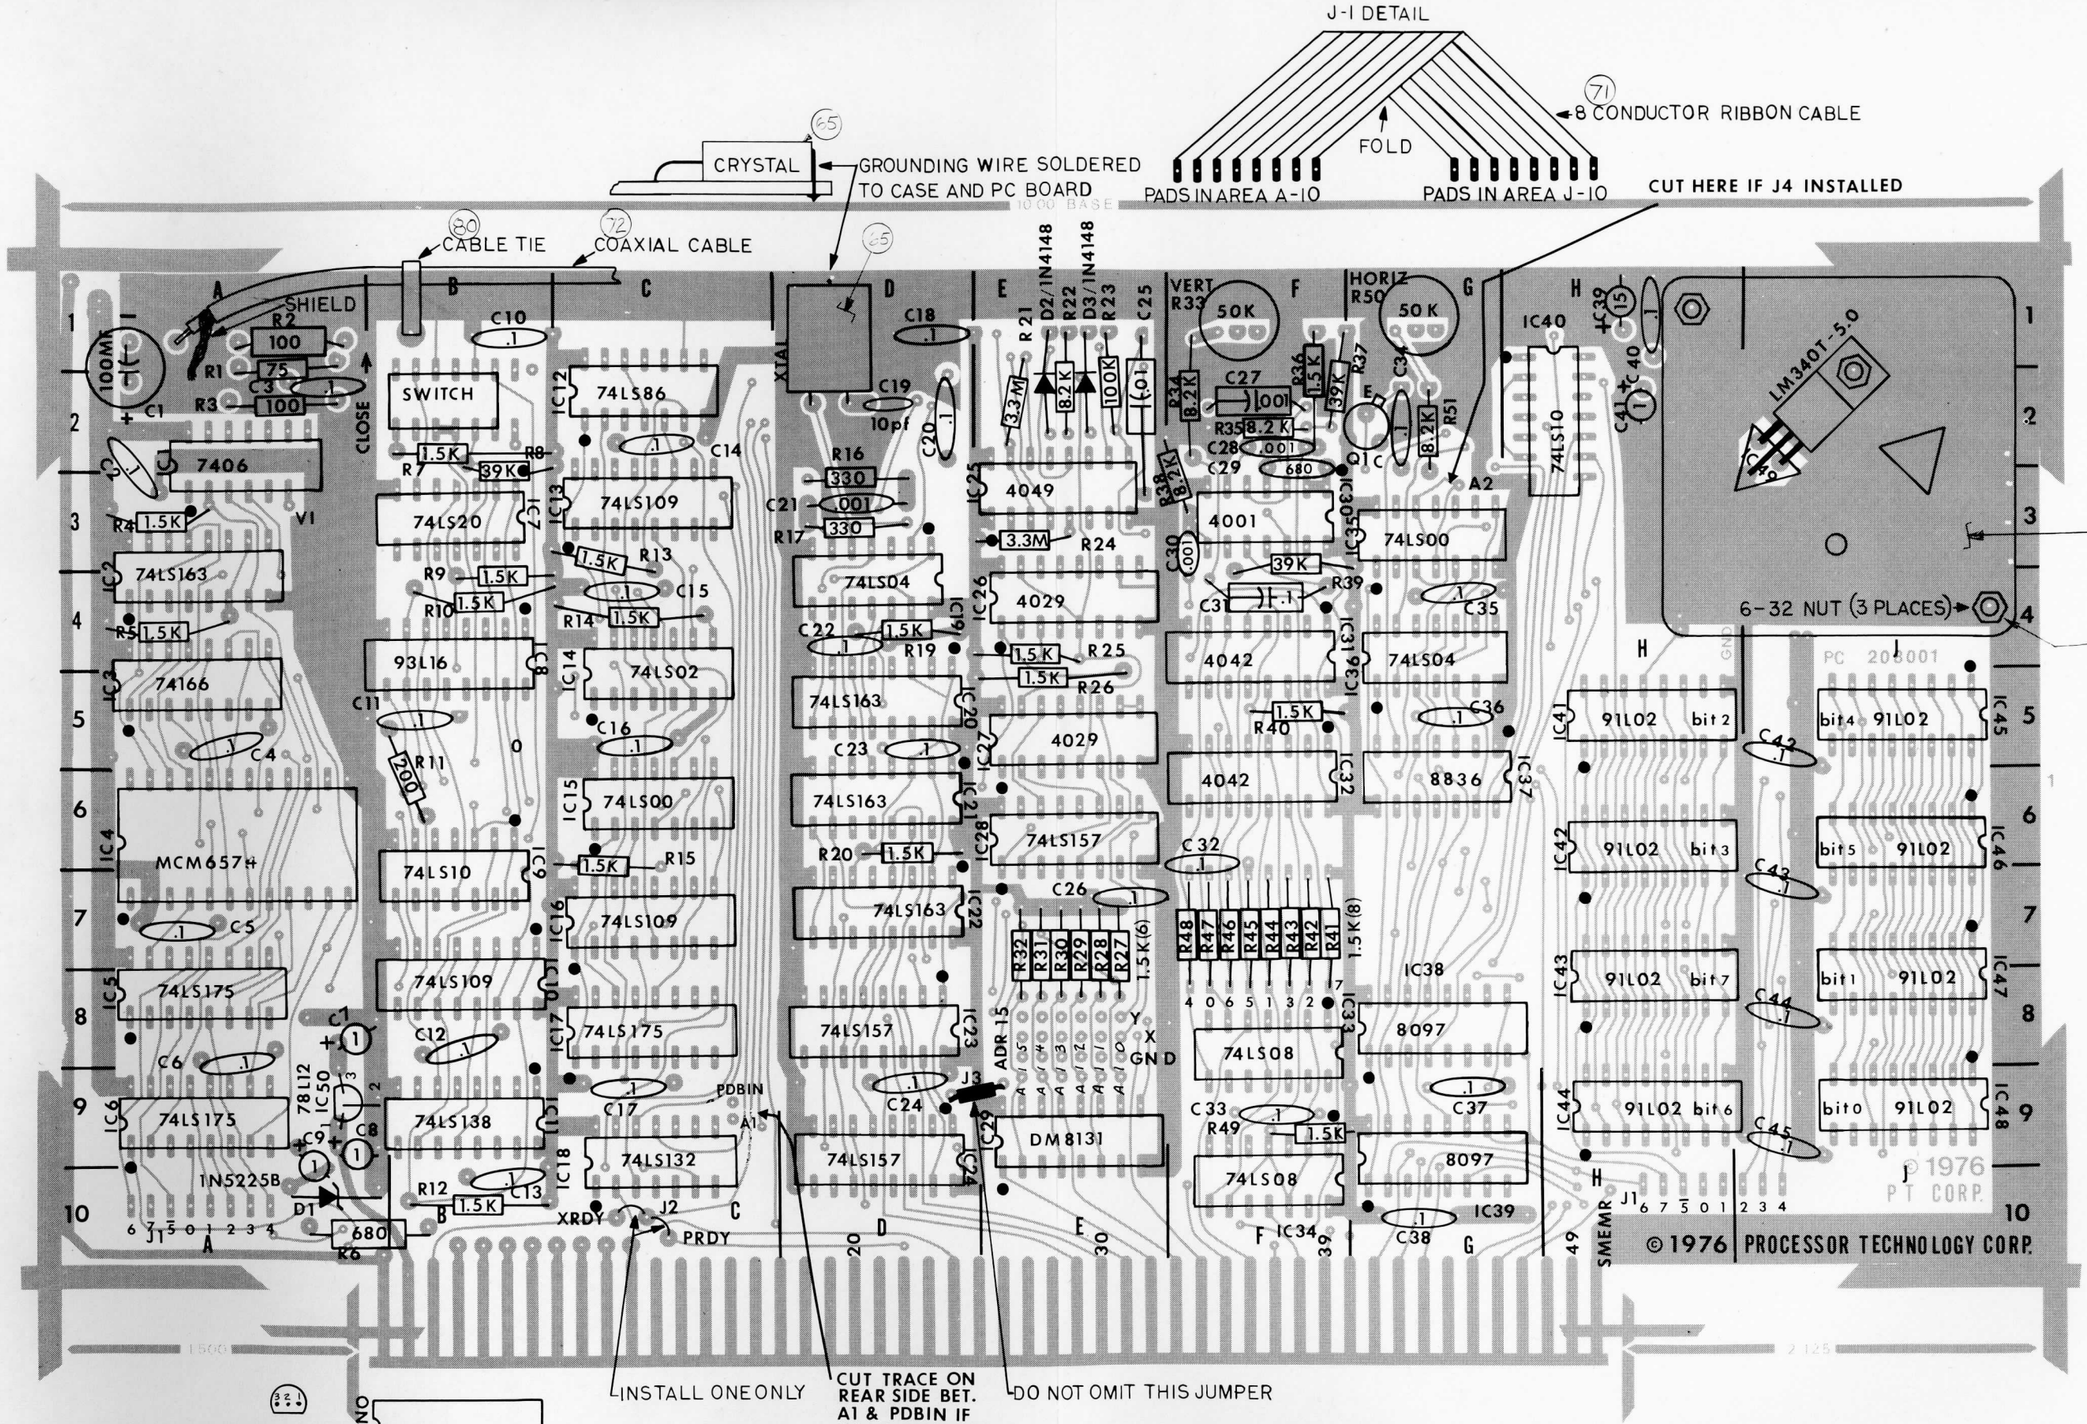
J-1 DETAIL
8 CONDUCTOR RIBBON CABLE
FOLD
PADS IN AREA A-10
PADS IN AREA J-10
CUT HERE IF J4 INSTALLED
CRYSTAL
GROUNDING WIRE SOLDERED TO CASE AND PC BOARD
CABLE TIE
COAXIAL CABLE
SHIELD
CLOSE
SWITCH
XTAL
VERT R33 50K
HORIZ R50 50K
LM340T-5.0
6-32 NUT (3 PLACES)
3 PLCS
7406
74LS163
74166
MCM6574
74LS175
74LS10
74LS109
74LS20
93L16
74LS86
74LS14
74LS02
74LS00
74LS132
74LS138
74LS04
74LS157
4049
4029
4001
4042
74LS08
74LS00
74LS04
8836
8097
DM8131
91L02
1N5225B
78L12
PDBIN
XRDY
PRDY
ADR 15
INSTALL ONE ONLY
CUT TRACE ON REAR SIDE BET. A1 & PDBIN IF J4, J5 INSTALLED
DO NOT OMIT THIS JUMPER
IC NO
DOT MARKS PIN 1
RESISTOR
DISC CAP.
MYLAR CAP.
DIODE BAND
POLARIZED CAP.
IC50
J4, J5 INSTALLED FOR OPERATION IN INTERRUPT-DRIVEN SYSTEMS
J4 = A1 TO SMEMR
J5 = PDBIN TO A2
VDM 1
assembly
© 1976 PROCESSOR TECHNOLOGY CORP.