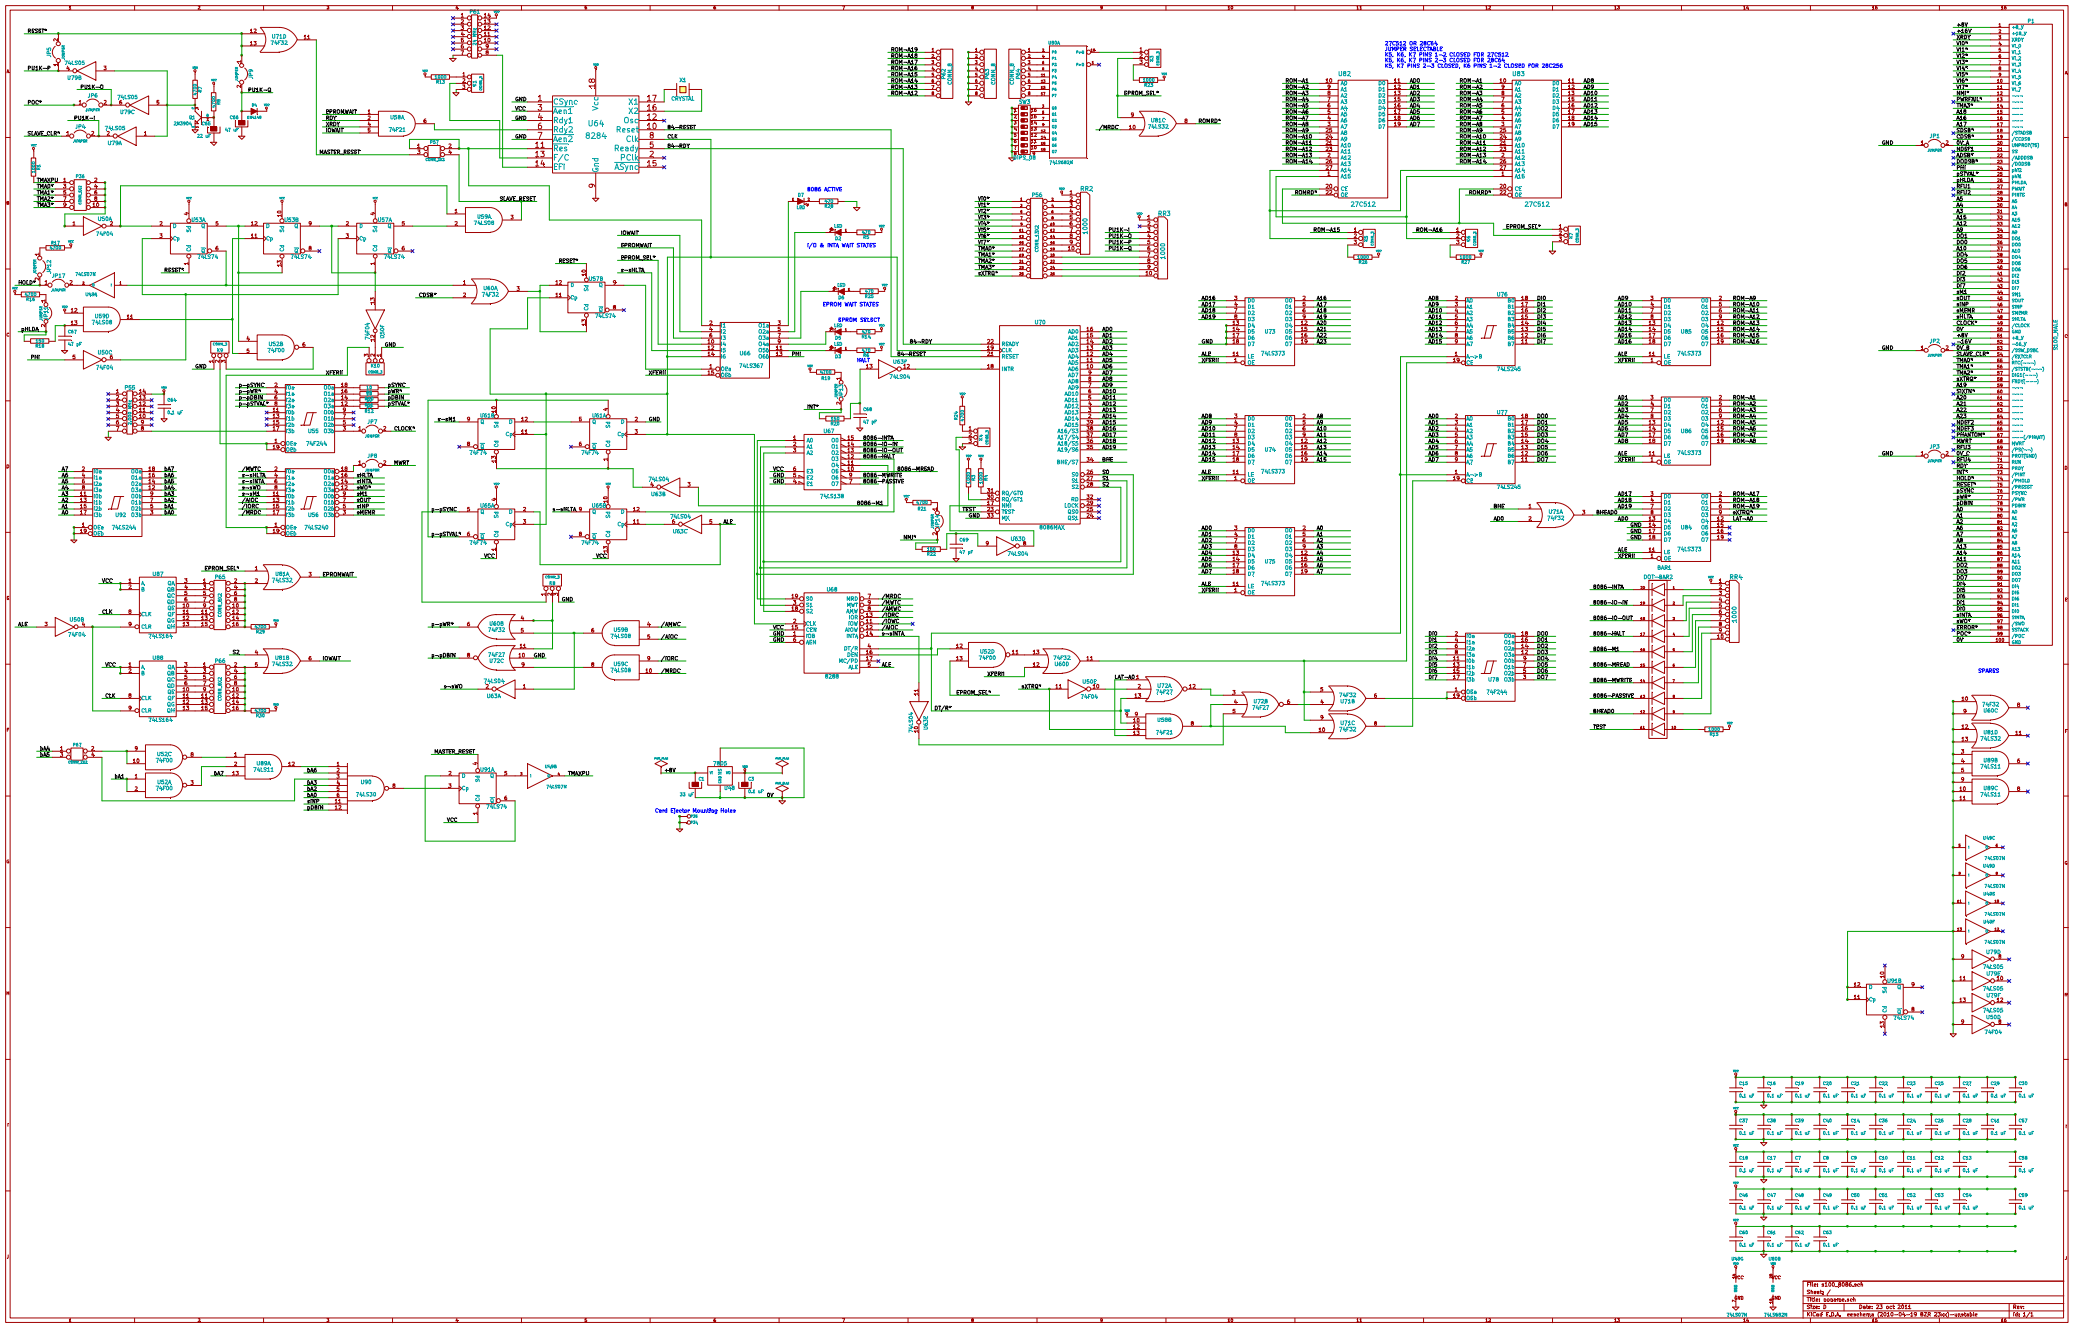
27C512 OR 28C256
JUMPER SELECTABLE
K3, K6, K7 PINS 1-2 CLOSED FOR 27C512
K3, K6, K7 PINS 2-3 CLOSED FOR 28C256
K5, K7 PINS 2-3 CLOSED, K6 PINS 1-2 CLOSED FOR 28C256
8086 ACTIVE
I/O & INTA WAIT STATES
EPROM WAIT STATES
EPROM SELECT
SPARES
Card Ejector Mounting Holes
File: s100_8086.sch
Sheet: /
Title: sosemanuk.sch
Size: B
Date: 23 oct 2011
Rev:
KiCad E.D.A. eeschema (2010-04-19 BZR 2760)-unstable
Id: 1/1