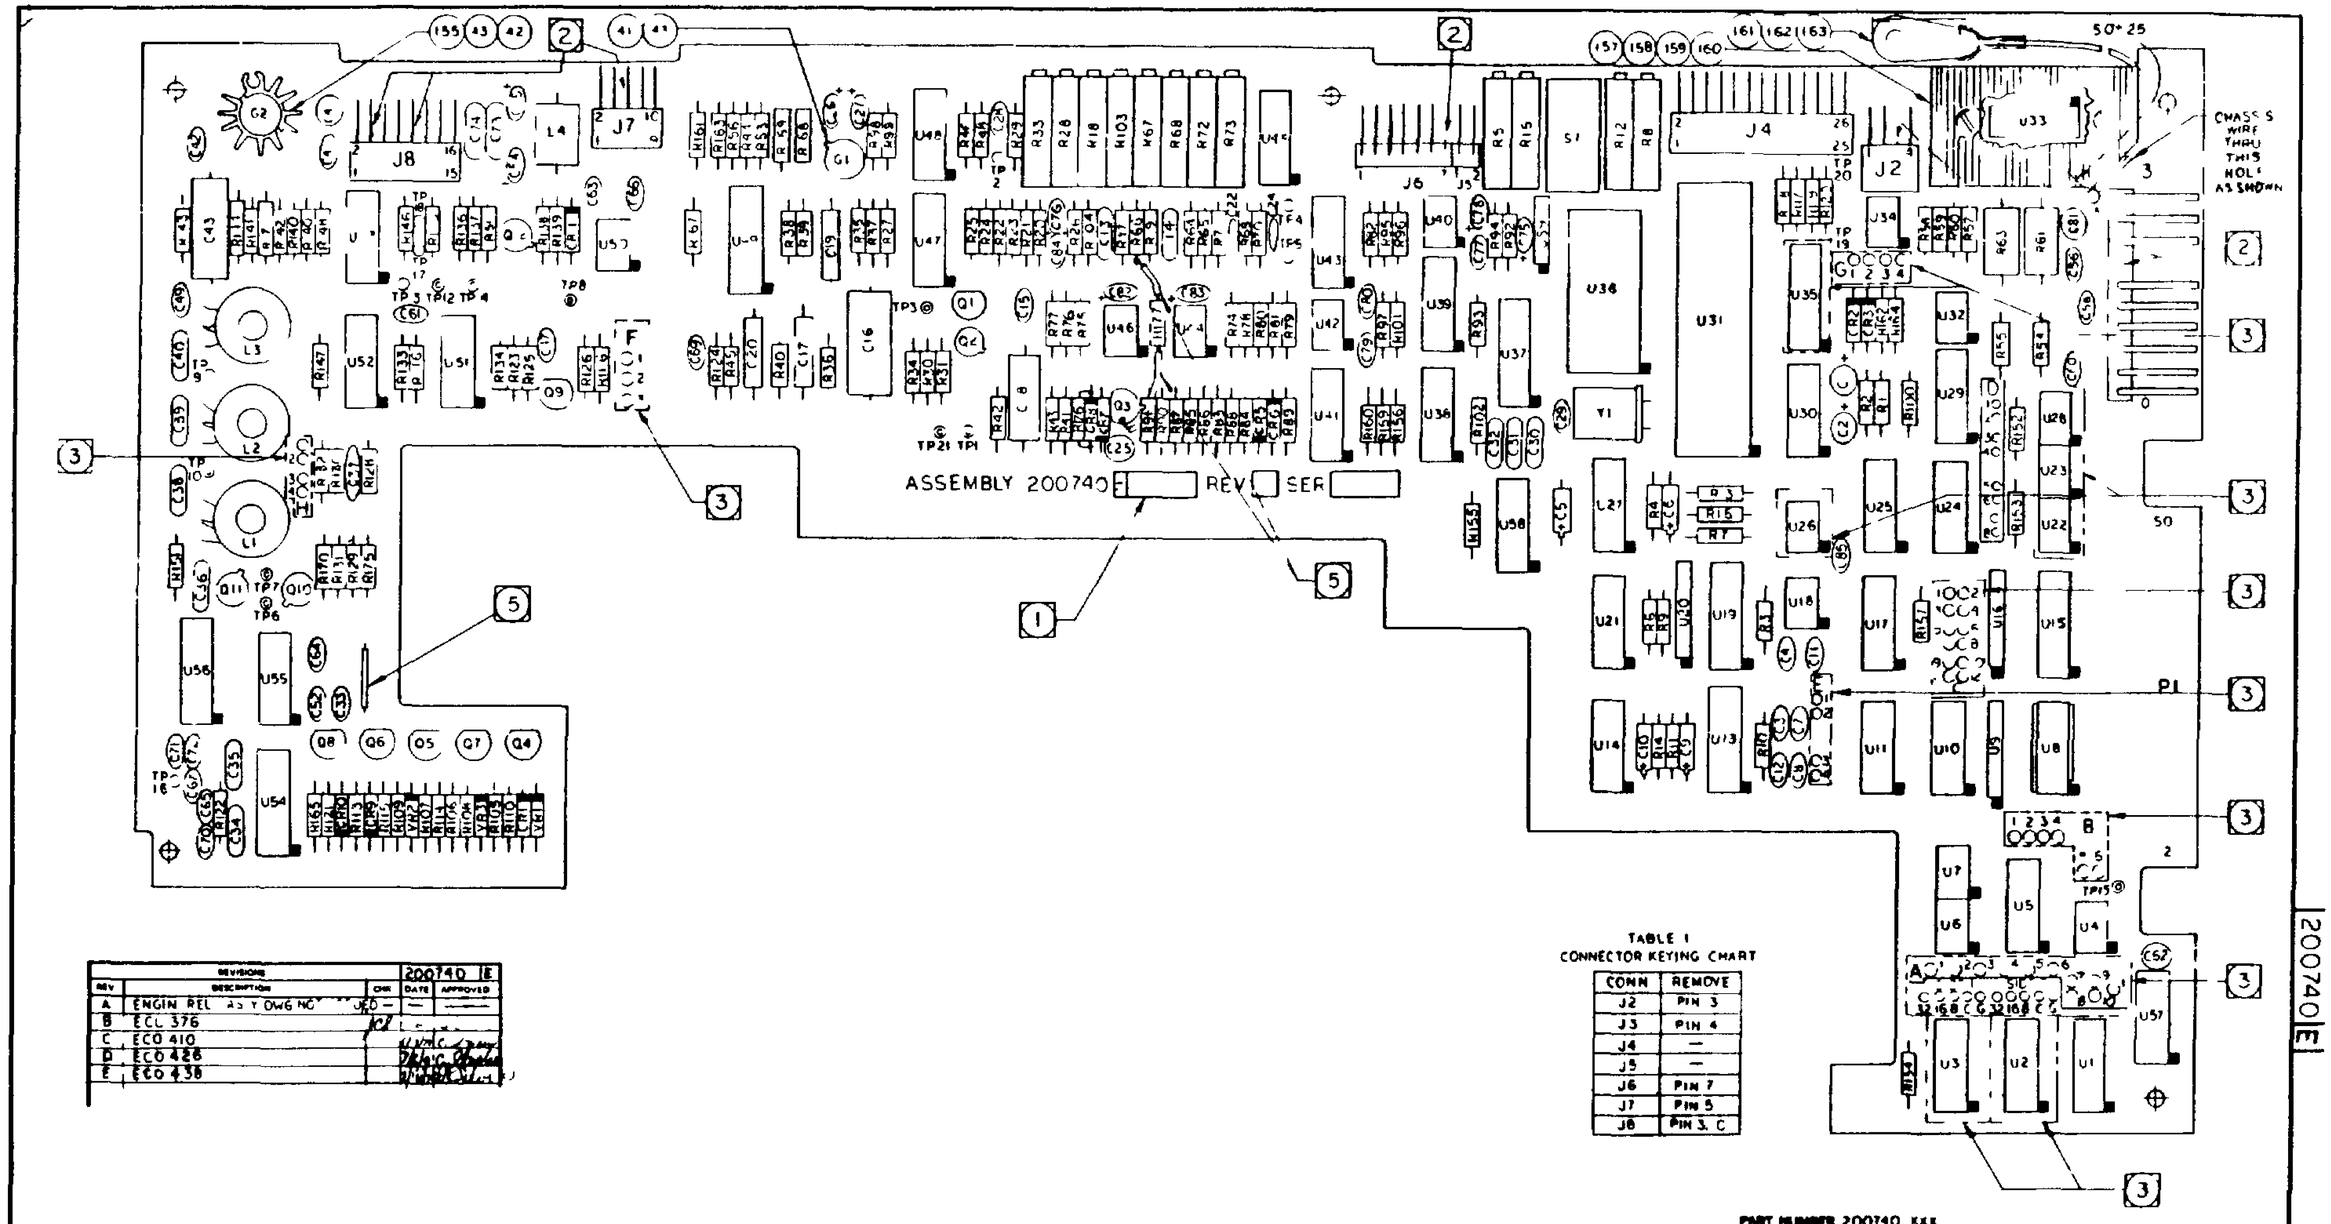

TABLE 1
CONNECTOR KEYING CHART

CONN	REMOVE
J2	PIN 3
J3	PIN 4
J4	—
J5	—
J6	PIN 7
J7	PIN 5
J8	PIN 3, C

REVISIONS			200740 E	
REV	DESCRIPTION	CHK	DATE	APPROVED
A	ENGIN REL AS Y DWG NO			
B	ECO 376			
C	ECO 410			
D	ECO 426			
E	ECO 438			

PART NUMBER 200740 XXX

5 USE SLEEVING P/N 100135 022 ON RESISTOR LEADS & BUSS WIRE

4 SCHEMATIC REF SEE 200741

3 COMPONENTS OUTLINED IN PHANTOM LINES ARE VARIABLE FOR COMP VALUES & JUMPER LOCATIONS SEE TABULATED M/L

2 REMOVE CONNECTOR PINS AS SPECIFIED ON TABLE 1 FOR KEYING, PRIOR TO CONNECTOR INSTALLATION.

1 MARK DASH VERSIONS REVISION AND SERIAL NUMBER 12 HIGH BLACK CHARACTERS IN AREA SHOWN

UNLESS OTHERWISE SPECIFIED:

NOTES UNLESS SPECIFIED
1 TOLERANCES
2 BREAK ALL SHARP EDGES APPROX .010
3 MACH SURFACES
4 ALL DIMS IN INCHES
5 DIMENSIONS APPLY AFTER PC FINI AND HEAT TREAT

DRAWN PCS 4 11 73
CHECK
APPR
MATERIAL
FINISH
MODEL NO 2998
NEXT ASSY 200800

PerSci Incorporated

ASSY PCB
DRIVE ELECTRONICS

COMP 12
QTY

SCALE 2
SIZE
200740
E

WEIGHT
SHT 1 OF 1

M/_