



MOSTEK®

Z80 MICROCOMPUTER SYSTEM

Micro-Reference Manual

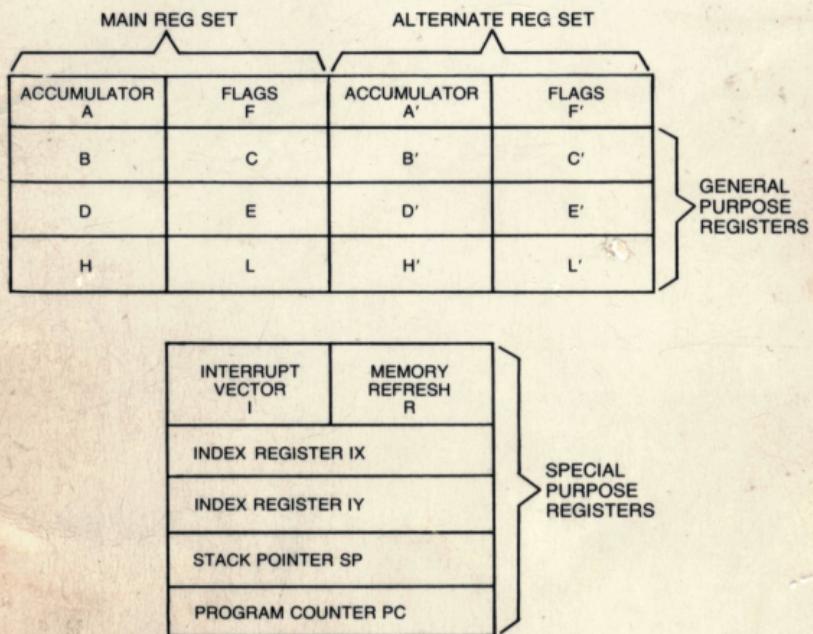

Z80-CPU REGISTER CONFIGURATION



SUMMARY OF FLAG OPERATION

Instruction	D7			D0			Comments		
	S	Z	H	P/V	N	C			
ADD A, s; ADC A, s	†	†	X	†	X	V	0	† 8-bit add or add with carry	
SUB s; SBC A, s; CPs; NEG	†	†	X	†	X	V	1	† 8-bit subtract, subtract with carry, compare and negate accumulator	
AND s	†	†	X	1	X	P	0	0	Logical operations
OR s; XOR s	†	†	X	0	X	P	0	0	
INC s	†	†	X	†	X	V	0	• 8-bit increment	
DEC s	†	†	X	†	X	V	1	• 8-bit decrement	
ADD DD, SS	•	•	X	X	X	•	0	† 16-bit add	
ADC HL, SS	†	†	X	X	X	V	0	† 16-bit add with carry	
SBC HL, SS	†	†	X	X	X	V	1	† 16-bit subtract with carry	
RLA; RLCA; RRA; RRCA	•	•	X	0	X	•	0	† Rotate accumulator	
RLs; RLCs; RRs; RRCs;	†	†	X	0	X	P	0	† Rotate and shift locations	
SLA s; SRA s; SRLs									
RLD; RRD	†	†	X	0	X	P	0	• Rotate digit left and right	
DAA	†	†	X	†	X	P	•	† Decimal adjust accumulator	
CPL	•	•	X	1	X	•	1	• Complement accumulator	
SCF	•	•	X	0	X	•	0	Set carry	
CCF	•	•	X	X	X	•	0	Complement carry	
IN r, (C)	†	†	X	0	X	P	0	• Input register indirect	
INI; IND; OUTI; OUTD	X	†	X	X	X	X	1	• Block input and output	
INIR; INDR; OTIR; OTDR	X	1	X	X	X	X	1	• Z = 0 if B ≠ 0 otherwise Z = 1	
LDI; LDD	X	X	X	0	X	†	0	• Block transfer instructions	
LDIR; LDDR	X	X	X	0	X	0	0	• P/V = 1 if BC ≠ 0, otherwise P/V = 0	
CPI; CPIR; CPD; CPDR	X	†	X	X	X	†	1	• Block search instructions Z = 1 if A = (HL), otherwise Z = 0 P/V = 1 if BC ≠ 0, otherwise P/V = 0	
LD A, I; LD A, R	†	†	X	0	X	IFF	0	• The content of the interrupt enable flip-flop (IFF) is copied into the P/V flag	
BIT b, s	X	†	X	1	X	X	0	• The state of bit b of location s is copied into the Z flag	

The following notation is used in this table:

Symbol	Operation
C	Carry/link flag. C=1 if the operation produced a carry from the MSB of the operand or result.
Z	Zero flag. Z=1 if the result of the operation is zero.
S	Sign flag. S=1 if the MSB of the result is one.
P/V	Parity or overflow flag. Parity (P) and overflow (V) share the same flag. Logical operations affect this flag with the parity of the result while arithmetic operations affect this flag with the overflow of the result. If P/V holds parity, P/V=1 if the result of the operation is even, P/V=0 if result is odd. If P/V holds overflow, P/V=1 if the result of the operation produced an overflow.
H	Half-carry flag. H=1 if the add or subtract operation produced a carry into or borrow from bit 4 of the accumulator.
N	Add/Subtract flag. N=1 if the previous operation was a subtract.
†	H and N flags are used in conjunction with the decimal adjust instruction (DAA) to properly correct the result into packed BCD format following addition or subtraction using operands with packed BCD format.
•	The flag is affected according to the result of the operation.
†	The flag is unchanged by the operation.
0	The flag is reset by the operation.
1	The flag is set by the operation.
X	The flag is a "don't care".
V	P/V flag affected according to the overflow result of the operation.
P	P/V flag affected according to the parity result of the operation.
r	Any one of the CPU registers A, B, C, D, E, H, L.
s	Any 8-bit location for all the addressing modes allowed for the particular instruction.
ss	Any 16-bit location for all the addressing modes allowed for that instruction.
ii	Any one of the two index registers IX or IY.
R	Refresh counter.
n	8-bit value in range <0, 255>
nn	16-bit value in range <0, 65535>

8-BIT LOAD GROUP
'LD'

		SOURCE															
		IMPLIED		REGISTER						REG INDIRECT			INDEXED		EXT. ADDR. IMME.		
		I	R	A	B	C	D	E	H	L	(HU)	(BC)	(DE)	(IX+d)	(IY+d)	(nn)	n
REGISTER	A	ED 57	ED 5F	7F	78	79	7A	7B	7C	7D	7E	0A	1A	DD 7E d	FD 7E d	3A n n	3E
	B			47	40	41	42	43	44	45	46			DD 46 d	FD 46 d		06 n
	C			4F	48	49	4A	4B	4C	4D	4E			DD 4E d	FD 4E d		0E n
	D			57	50	51	52	53	54	55	56			DD 56 d	FD 56 d		16 n
	E			5F	58	59	5A	5B	5C	5D	5E			DD 5E d	FD 5E d		1E n
	H			67	60	61	62	63	64	65	66			DD 66 d	FD 66 d		26 n
	L			6F	68	69	6A	6B	6C	6D	6E			DD 6E d	FD 6E d		2E n
DESTINATION	(HL)			77	70	71	72	73	74	75							36 n
	REG INDIRECT			02													
	(BC)			12													
INDEXED	(IX+d)			DD 77 d	DD 70 d	DD 71 d	DD 72 d	DD 73 d	DD 74 d	DD 75 d							DD 36 d n
	(IY+d)			FD 77 d	FD 70 d	FD 71 d	FD 72 d	FD 73 d	FD 74 d	FD 75 d							FD 36 d n
	EXT.ADDR.	(nn)		32 n n													
IMPLIED	I			ED 47													
	R			ED 4F													

8-BIT LOAD GROUP

Mnemonic	Symbolic Operation	Flags						Op-Code			No. of Bytes	No. of Cycles	No. of T States	Comments			
		S	Z	H	P/V	N	C	76	543	210							
LD r, s	r ← s	•	•	X	•	X	•	•	01	r	s	1	1	4	r, s Reg.		
LD r, n	r ← n	•	•	X	•	X	•	•	00	r	110	2	2	7	000 B		
								←	n	→					001 C		
LD r, (HL)	r ← (HL)	•	•	X	•	X	•	•	01	r	110					010 D	
LD r, (IX+d)	r ← (IX+d)	•	•	X	•	X	•	•	11	011	101	DD	1	2	7	011 E	
								01	r	110					100 H		
								←	d	→					101 L		
LD r, (IY+d)	r ← (IY+d)	•	•	X	•	X	•	•	11	111	101	FD	3	5	19	111 A	
								01	r	110							
								←	d	→							
LD (HL), r	(HL) ← r	•	•	X	•	X	•	•	01	110	r						
LD (IX+d), r	(IX+d) ← r	•	•	X	•	X	•	•	11	011	101	DD	1	2	7		
								01	110	r							
LD (IY+d), r	(IY+d) ← r	•	•	X	•	X	•	•	11	111	101	FD	3	5	19		
								01	110	r							
LD (HL), n	(HL) ← n	•	•	X	•	X	•	•	00	110	110	36	2	3	10		
LD (IX+d), n	(IX+d) ← n	•	•	X	•	X	•	•	11	011	101	DD	4	5	19		
								00	110	110	36						
LD (IY+d), n	(IY+d) ← n	•	•	X	•	X	•	•	11	111	101	FD	4	5	19		
								00	110	110	36						
								←	d	→							
								←	n	→							
LD A, (BC)	A ← (BC)	•	•	X	•	X	•	•	00	001	010	0A	1	2	7		
LD A, (DE)	A ← (DE)	•	•	X	•	X	•	•	00	011	010	1A	1	2	7		
LD A, (nn)	A ← (nn)	•	•	X	•	X	•	•	00	111	010	3A	3	4	13		
								←	n	→							
LD (BC), A	(BC) ← A	•	•	X	•	X	•	•	00	000	010	02	1	2	7		
LD (DE), A	(DE) ← A	•	•	X	•	X	•	•	00	010	010	12	1	2	7		
LD (nn), A	(nn) ← A	•	•	X	•	X	•	•	00	110	010	32	3	4	13		
								←	n	→							
								←	n	→							
LD A, I	A ← I	†	†	X	0	X	IFF	0	•	11	101	101	ED	2	2	9	
								01	010	111	57						
LD A, R	A ← R	†	†	X	0	X	IFF	0	•	11	101	101	ED	2	2	9	
								01	011	111	5F						
LD I, A	I ← A	•	•	X	•	X	•	•	•	11	101	101	ED	2	2	9	
								01	000	111	47						
LD R, A	R ← A	•	•	X	•	X	•	•	•	11	101	101	ED	2	2	9	
								01	001	111	4F						

Notes: r, s means any of the registers A, B, C, D, E, H, L

IFF the content of the interrupt enable flip-flop (IFF) is copied into the P/V flag

Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag is unknown,
† = flag is affected according to the result of the operation.

16-BIT LOAD GROUP
 'LD'
 'PUSH' AND 'POP'

		SOURCE							IMM. EXT.	EXT. ADDR.	REG. INDIR.
		REGISTER									
		AF	BC	DE	HL	SP	IX	IY	nn	(nn)	(SP)
DESTINATION	AF										F1
	BC								01 n n	ED 4B n n	C1
	DE								11 n n	ED 5B n n	D1
	HL								21 n n	2A n n	E1
	SP				F9		DD F9	FD F9	31 n n	ED 7B n n	
	IX								DD 21 n n	DD 2A n n	DD E1
	IY								FD 21 n n	FD 2A n n	FD E1
EXT. ADDR.		(nn)		ED 43 n n	ED 53 n n	22 n n	ED 73 n n	DD 22 n n	FD 22 n n		
REG. IND.		(SP)	F5	C5	D5	E5		DD E5	FD E5		

NOTE: The Push & Pop Instructions adjust
 the SP after every execution.

↑
 POP
 INSTRUCTIONS

16-BIT LOAD GROUP

Mnemonic	Symbolic Operation	Flags						Op-Code			No. of Bytes	No. of M Cycles	No. of T States	Comments	
		S	Z	H	P/V	N	C	76	543	210					
LD dd, nn	dd ← nn	•	•	X	•	X	•	•	00	dd0 001		3	3	10	dd Pair
								←	n	→					00 BC
						+	n	→							01 DE
LD IX, nn	IX ← nn	•	•	X	•	X	•	•	11	011 101	DD	4	4	14	10 HL
								00	100 001	21					11 SP
LD IY, nn	IY ← nn	•	•	X	•	X	•	•	11	111 101	FD	4	4	14	
								00	100 001	21					
LD HL, (nn)	H ← (nn+1) L ← (nn)	•	•	X	•	X	•	•	00	101 010	2A	3	5	16	
								←	n	→					
LD dd, (nn)	ddH ← (nn+1) ddL ← (nn)	•	•	X	•	X	•	•	11	101 101	ED	4	6	20	
								01	dd1 011						
LD IX, (nn)	IXH ← (nn+1) IXL ← (nn)	•	•	X	•	X	•	•	11	011 101	DD	4	6	20	
								00	101 010	2A					
LD IY, (nn)	IYH ← (nn+1) IYL ← (nn)	•	•	X	•	X	•	•	11	111 101	FD	4	6	20	
								00	101 010	2A					
LD (nn), HL	(nn+1) ← H (nn) ← L	•	•	X	•	X	•	•	00	100 010	22	3	5	16	
								←	n	→					
LD (nn), dd	(nn+1) ← ddH (nn) ← ddL	•	•	X	•	X	•	•	11	101 101	ED	4	6	20	
								01	dd0 011						
LD (nn), IX	(nn+1) ← IXH (nn) ← IXL	•	•	X	•	X	•	•	11	011 101	DD	4	6	20	
								00	100 010	22					
LD (nn), IY	(nn+1) ← IYH (nn) ← IYL	•	•	X	•	X	•	•	11	111 101	FD	4	6	20	
								00	100 010	22					
LD SP, HL	SP ← HL	•	•	X	•	X	•	•	11	111 001	F9	1	1	6	
LD SP, IX	SP ← IX	•	•	X	•	X	•	•	11	011 101	DD	2	2	10	
LD SP, IY	SP ← IY	•	•	X	•	X	•	•	11	111 001	FD	2	2	10	qq Pair
PUSH qq	(SP-2) ← qqL (SP-1) ← qqH	•	•	X	•	X	•	•	11	qq1 101	F9	1	3	11	00 BC
PUSH IX	(SP-2) ← IXL (SP-1) ← IXH	•	•	X	•	X	•	•	11	011 101	DD	2	4	15	01 DE
PUSH IY	(SP-2) ← IYL (SP-1) ← IYH	•	•	X	•	X	•	•	11	100 101	E5	2	4	15	10 HL
POP qq	qqH ← (SP+1) qqL ← (SP)	•	•	X	•	X	•	•	11	100 101	FD	2	4	15	11 AF
POP IX	IXH ← (SP+1) IXL ← (SP)	•	•	X	•	X	•	•	11	100 001	E1	2	4	14	
POP IY	IYH ← (SP+1) IYL ← (SP)	•	•	X	•	X	•	•	11	111 101	FD	2	4	14	
								11	100 001	E1					

Notes: dd is any of the register pairs BC, DE, HL, SP
 qq is any of the register pairs AF, BC, DE, HL

(PAIR)_H, (PAIR)_L refer to high order and low order eight bits of the register pair respectively.
 e.g. BC_L = C, AF_H = A

Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag is unknown,
 ↓ flag is affected according to the result of the operation.

**EXCHANGES
'EX' AND 'EXX'**

		IMPLIED ADDRESSING				
		AF'	BC', DE' & HL'	HL	IX	IY
IMPLIED	AF	08				
	BC, DE & HL		D9			
	DE			EB		
REG. INDIR.	(SP)			E3	DD E3	FD E3

BLOCK TRANSFER GROUP

BLOCK SEARCH GROUP

		SOURCE	SEARCH LOCATION
		REG. INDIR.	REG. INDIR.
DESTINATION	REG. INDIR.	(HL)	(HL)
		ED	'LDI' – Load (DE) ← (HL) Inc HL & DE, Dec BC
	(DE)	AO	'LDI R' – Load (DE)←(HL) Inc HL & DE, Dec BC, Repeat until BC = 0
		ED	'LDIR' – Load (DE)←(HL) Inc HL & DE, Dec BC, Repeat until BC = 0
		BO	'LDD' – Load (DE) ← (HL) Dec HL & DE, Dec BC
		A8	'LDDR' – Load (DE)←(HL) Dec HL & DE, Dec BC, Repeat until BC = 0
		ED	'CPI' – Inc HL, Dec BC
		B8	'CPIR' – Inc HL, Dec BC repeat until BC = 0 or find match
		ED	'CPD' – Dec HL & BC
		A9	'CPDR' – Dec HL & BC Repeat until BC = 0 or find match
		ED	
		B9	

HL points to source

DE points to destination

BC is byte counter

HL points to location in memory
to be compared with accumulator
contents

BC is byte counter

EXCHANGE GROUP AND BLOCK TRANSFER AND SEARCH GROUP

Mnemonic	Symbolic Operation	Flags						Op-Code				No. of Bytes	No. of M Cycles	No. of T States	Comments		
		S	Z	H	P/V	N	C	76	543	210	Hex						
EX DE, HL	DE--HL	•	•	X	•	X	•	•	11	101	011	EB	1	1	4		
EX AF, AF'	AF--AF'	•	•	X	•	X	•	•	00	001	000	08	1	1	4		
EXX	(BC--BC') (DE--DE') (HL--HL')	•	•	X	•	X	•	•	11	011	001	D9	1	1	4	Register bank and auxiliary register bank exchange	
EX (SP), HL	H --(SP+1)	•	•	X	•	X	•	•	11	100	011	E3	1	5	19		
	L --(SP)																
EX (SP), IX	IX _H --(SP+1)	•	•	X	•	X	•	•	11	011	101	DD	2	6	23		
	IX _L --(SP)																
EX (SP), IY	IY _H --(SP+1)	•	•	X	•	X	•	•	11	111	101	FD	2	6	23		
	IY _L --(SP)																
LDI	(DE)--(HL)	•	•	X	0	X	↑	0	•	11	101	101	ED	2	4	16	Load (HL) into (DE), increment the pointers and decrement the byte counter (BC) If BC ≠ 0 If BC = 0
	DE - DE+1									10	100	000	A0				
	HL - HL+1																
	BC - BC-1																
LDIR	(DE)--(HL)	•	•	X	0	X	0	0	•	11	101	101	ED	2	5	21	
	DE - DE+1									10	110	000	B0	2	4	16	If BC ≠ 0 If BC = 0
	HL - HL+1																
	BC - BC-1																
LDD	(DE)--(HL)	•	•	X	0	X	↑	0	•	11	101	101	ED	2	4	16	
	DE - DE-1									10	101	000	A8				
LDDR	HL - HL-1																
	BC - BC-1																
	Repeat until BC = 0																
	(DE)--(HL)	•	•	X	0	X	0	0	•	11	101	101	ED	2	5	21	If BC ≠ 0 If BC = 0
CPI	DE - DE-1									10	111	000	B8	2	4	16	
	HL - HL-1																
CPIR	BC - BC-1																
	Repeat until A = (HL) or BC = 0																
	A - (HL)	†	†	X	†	X	↑	1	•	11	101	101	ED	2	4	16	If BC ≠ 0 and A ≠ (HL) If BC = 0 or A = (HL)
	HL - HL+1									10	100	001	A1				
CPD	BC - BC-1																
	Repeat until A = (HL) or BC = 0																
CPDR	A - (HL)	†	†	X	†	X	↑	1	•	11	101	101	ED	2	4	16	If BC ≠ 0 and A ≠ (HL) If BC = 0 or A = (HL)
	HL - HL-1									10	101	001	A9				
	BC - BC-1																
	Repeat until A = (HL) or BC = 0																

Notes: ① P/V flag is 0 if the result of BC-1 = 0, otherwise P/V = 1

② Z flag is 1 if A = (HL), otherwise Z = 0.

Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag is unknown,
† = flag is affected according to the result of the operation.

8-BIT ARITHMETIC AND LOGIC

SOURCE

	REGISTER ADDRESSING								REG. INDIR.	(IX+d)	(IY+d)	IMMEO.
	A	B	C	D	E	H	L	(HL)				
'ADD'	87	80	81	82	83	84	85	86	DD 86 d	FD 86 d	C6 n	
ADD w CARRY 'ADC'	8F	88	89	8A	8B	8C	8D	8E	DD 8E d	FD 8E d	CE n	
SUBTRACT 'SUB'	97	90	91	92	93	94	95	96	DD 96 d	FD 96 d	D6 n	
SUB w CARRY 'SBC'	9F	98	99	9A	9B	9C	9D	9E	DD 9E d	FD 9E d	DE n	
'AND'	A7	A0	A1	A2	A3	A4	A5	A6	DD A6 d	FD A6 d	E6 n	
'XOR'	AF	A8	A9	AA	AB	AC	AD	AE	DD AE d	FD AE d	EE n	
'OR'	B7	B0	B1	B2	B3	B4	B5	B6	DD B6 d	FD B6 d	F6 n	
COMPARE 'CP'	BF	B8	B9	BA	BB	BC	BD	BE	DD BE d	FD BE d	FE n	
INCREMENT 'INC'	3C	04	0C	14	1C	24	2C	34	DD 34 d	FD 34 d		
DECREMENT 'DEC'	3D	05	0D	15	1D	25	2D	35	DD 35 d	FD 35 d		

8-BIT ARITHMETIC AND LOGICAL GROUP

Mnemonic	Symbolic Operation	Flags						Op-Code				No. of Bytes	No. of Cycles	No. of M States	No. of T States	Comments
		S	Z	H	P/V	N	C	76	543	210	Hex					
ADD A, r	A - A + r	†	†	X	†	X	V	0	†	10 [000] r		1	1	4	r	Reg.
ADD A, n	A - A + n	†	†	X	†	X	V	0	†	11 [000] 110 - n -		2	2	7	000	B
															001	C
															010	D
ADD A, (HL)	A - A+(HL)	†	†	X	†	X	V	0	†	10 [000] 110		1	2	7	011	E
ADD A, (IX+d)	A - A+(IX+d)	†	†	X	†	X	V	0	†	11 011 101 10 [000] 110 - d -	DD	3	5	19	100	H
															101	L
															111	A
ADD A, (IY+d)	A - A+(IY+d)	†	†	X	†	X	V	0	†	11 111 101 10 [000] 110 - d -	FD	3	5	19		
ADC A, s	A - A+s+CY	†	†	X	†	X	V	0	†	[001]						
SUB s	A - A - s	†	†	X	†	X	V	1	†	[010]						
SBC A, s	A - A - s - CY	†	†	X	†	X	V	1	†	[011]						
AND s	A - A \wedge s	†	†	X	1	X	P	0	0	[100]						
OR s	A - A \vee s	†	†	X	0	X	P	0	0	[110]						
XOR s	A - A \oplus s	†	†	X	0	X	P	0	0	[101]						
CPS	A - s	†	†	X	†	X	V	1	†	[111]						
INC r	r - r + 1	†	†	X	†	X	V	0	•	00 r [100]		1	1	4		
INC (HL)	(HL)-(HL)+1	†	†	X	†	X	V	0	•	00 110 [100]		1	3	11		
INC (IX+d)	(IX+d) - (IX+d)+1	†	†	X	†	X	V	0	•	11 011 101 00 110 [100] - d -	DD	3	6	23		
INC (IY+d)	(IY+d) - (IY+d)+1	†	†	X	†	X	V	0	•	11 111 101 00 110 [100] - d -	FD	3	6	23		
DEC s	s - s - 1	†	†	X	†	X	V	1	•	[101]						

Notes: The V symbol in the P/V flag column indicates that the P/V flag contains the overflow of the result of the operation. Similarly the P symbol indicates parity. V = 1 means overflow, V = 0 means not overflow, P = 1 means parity of the result is even, P = 0 means parity of the result is odd.

Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag is unknown.

† = flag is affected according to the result of the operation.

GENERAL PURPOSE AF OPERATIONS

Decimal Adjust Acc, 'DAA'	27	CPL
Complement Acc, 'CPL'	2F	NEG
Negate Acc, 'NEG' (2's complement)	ED 44	CCF
Complement Carry Flag, 'CCF'	3F	SCF
Set Carry Flag, 'SCF'	37	NOP

HALT
DI *
EI *IM 0

IM 1

IM 2

MISCELLANEOUS CPU CONTROL

'NOP'	00	
'HALT'	76	
DISABLE INT '(DI)'	F3	
ENABLE INT '(EI)'	FB	
SET INT MODE 0 'IM 0'	ED 46	8080A MODE
SET INT MODE 1 'IM 1'	ED 56	RESTART TO LOCATION 0038H
SET INT MODE 2 'IM 2'	ED 5E	INDIRECT CALL USING REGISTER I AND 8 BITS FROM INTERRUPTING DEVICE AS A POINTER.

GENERAL PURPOSE ARITHMETIC AND CPU CONTROL GROUPS

Symbolic Operation	Flags						Op-Code				No. of Bytes	No. of M Cycles	No. of T States	Comments
	S	Z	H	P/V	N	C	76	543	210	Hex				
Converts acc, content into packed BCD following add or subtract with packed BCD operands	†	†	X	†	X	P	*	†	00 100 111	27	1	1	4	Decimal adjust accumulator
A - \overline{A}	•	•	X	1	X	•	1	•	00 101 111	2F	1	1	4	Complement accumulator (One's complement)
A - $\overline{A} + 1$	†	†	X	†	X	V	1	†	11 101 101 01 000 100	ED 44	2	2	8	Negate acc, (two's complement)
CY - \overline{CY}	•	•	X	X	X	•	0	†	00 111 111	3F	1	1	4	Complement carry flag
CY - 1	•	•	X	0	X	•	0	1	00 110 111	37	1	1	4	Set carry flag
No operation	•	•	X	•	X	•	•	•	00 000 000	00	1	1	4	
CPU halted	•	•	X	•	X	•	•	•	01 110 110	76	1	1	4	
IFF = 0	•	•	X	•	X	•	•	•	11 110 011	F3	1	1	4	
IFF = 1	•	•	X	•	X	•	•	•	11 111 011	FB	1	1	4	
Set interrupt mode 0	•	•	X	•	X	•	•	•	11 101 101 01 000 110	ED 46	2	2	8	
Set interrupt mode 1	•	•	X	•	X	•	•	•	11 101 101 01 010 110	ED 56	2	2	8	
Set interrupt mode 2	•	•	X	•	X	•	•	•	11 101 101 01 011 110	ED 5E	2	2	8	

Notes: IFF indicates the interrupt enable flip-flop

CY indicates the carry flip-flop.

Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag unknown,

† = flag is affected according to the result of the operation.

* = Interrupts are not sampled at the end of EI or DI

16-BIT ARITHMETIC

		SOURCE						
DESTINATION	'ADD'	HL	09	19	29	39		
		IX	DD 09	DD 19		DD 39	DD 29	
		IY	FD 09	FD 19		FD 39		FD 29
	ADD WITH CARRY AND SET FLAGS 'ADC'	HL	ED 4A	ED 5A	ED 6A	ED 7A		
	SUB WITH CARRY AND SET FLAGS 'SBC'	HL	ED 42	ED 52	ED 62	ED 72		
	INCREMENT 'INC'		03	13	23	33	DD 23	FD 23
			0B	1B	2B	3B	DD 2B	FD 2B

16-BIT ARITHMETIC GROUP

Mnemonic	Symbolic Operation	Flags						Op-Code				No. of Bytes	No. of Cycles	No. of States	Comments
		S	Z	H	P/V	N	C	76	543	210	Hex				
ADD HL, ss	HL - HL+ss	•	•	X	X	X	•	0	†	00 ss1 001		1	3	11	ss Reg. 00 BC 01 DE 10 HL 11 SP
ADC HL, ss	HL - HL+ss+CY	†	†	X	X	X	V	0	†	11 101 101 01 ss1 010	ED	2	4	15	
SBC HL, ss	HL - HL-ss-CY	†	†	X	X	X	V	1	†	11 101 101 01 ss0 010	ED	2	4	15	
ADD IX, pp	IX - IX + pp	•	•	X	X	X	•	0	†	11 011 101 00 pp1 001	DD	2	4	15	pp Reg. 00 BC 01 DE 10 IX 11 SP
ADD IY, rr	IY - IY + rr	•	•	X	X	X	•	0	†	11 111 101 00 rr1 001	FD	2	4	15	rr Reg. 00 BC 01 DE 10 IY 11 SP
INC ss	ss - ss + 1	•	•	X	•	X	•	•	•	00 ss0 011		1	1	6	
INC IX	IX - IX + 1	•	•	X	•	X	•	•	•	11 011 101 00 100 011	DD	2	2	10	
INCI Y	IY - IY + 1	•	•	X	•	X	•	•	•	11 111 101 00 100 011	FD	2	2	10	
DEC ss	ss - ss - 1	•	•	X	•	X	•	•	•	00 ss1 011		1	1	6	
DEC IX	IX - IX - 1	•	•	X	•	X	•	•	•	11 011 101 00 101 011	DD	2	2	10	
DECI Y	IY - IY - 1	•	•	X	•	X	•	•	•	11 111 101 00 101 011	FD	2	2	10	

Notes: ss is any of the register pairs BC, DE, HL, SP

pp is any of the register pairs BC, DE, IX, SP


rr is any of the register pairs BC, DE, IY, SP.

Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag is unknown.

† = flag is affected according to the result of the operation.

ROTATES AND SHIFTS

Source and Destination											A
TYPE OF ROTATE OR SHIFT	A	B	C	D	E	H	L	(HL)	(IX+d)	(IY+d)	A
	'RLC'	CB 07	CB 00	CB 01	CB 02	CB 03	CB 04	CB 05	CB 06	DD CB d 06	'RLCA' 07
	'RRC'	CB 0F	CB 08	CB 09	CB 0A	CB 0B	CB 0C	CB 0D	CB 0E	DD FD CB d 0E	'RRCA' 0F
	'RL'	CB 17	CB 10	CB 11	CB 12	CB 13	CB 14	CB 15	CB 16	DD FD CB d 16	'RLA' 17
	'RR'	CB 1F	CB 18	CB 19	CB 1A	CB 1B	CB 1C	CB 1D	CB 1E	DD FD CB d 1E	'RRA' 1F
	'SLA'	CB 27	CB 20	CB 21	CB 22	CB 23	CB 24	CB 25	CB 26	DD FD CB d 26	
	'SRA'	CB 2F	CB 28	CB 29	CB 2A	CB 2B	CB 2C	CB 2D	CB 2E	DD FD CB d 2E	
	'SRL'	CB 3F	CB 38	CB 39	CB 3A	CB 3B	CB 3C	CB 3D	CB 3E	DD FD CB d 3E	
	'RLD'								ED 6F		
	'RRD'								ED 67		

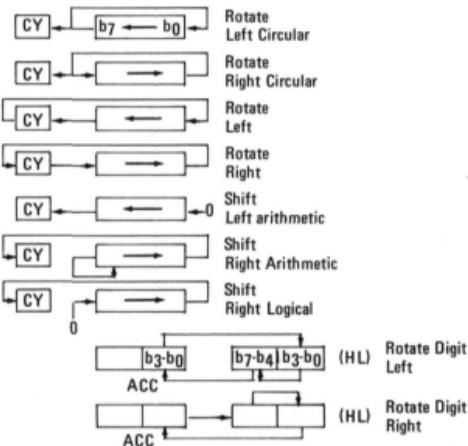

ROTATE AND SHIFT GROUP

Mnemonic	Symbolic Operation	Flags						Op-Code		No.of Bytes	No.of Cycles	No.of States	Comments	
		S	Z	H	P/ V	N	C	76 543 210	Hex					
RLCA		•	•	X	0	X	•	0	†	00 000 111	07	1	1	4
RLA		•	•	X	0	X	•	0	†	00 010 111	17	1	1	4
RRCA		•	•	X	0	X	•	0	†	00 001 111	0F	1	1	4
RRA		•	•	X	0	X	•	0	†	00 011 111	1F	1	1	4
RLCr		†	†	X	0	X	P	0	†	11 001 011 00 000 r	CB	2	2	8
RLC (HL)		†	†	X	0	X	P	0	†	11 001 011 00 000 110	CB	2	4	15
RLC (IX+d)		†	†	X	0	X	P	0	†	11 011 101 11 001 011 + d + 00 000 110	DD	4	6	23
RLC (IY+d)		†	†	X	0	X	P	0	†	11 111 101 11 001 011 + d + 00 000 110	FD	4	6	23
RLs		†	†	X	0	X	P	0	†	010				Instruction format and states are as shown for RLC's. To form new Op-Code replace 000 of RLC's with shown code
RRCs		†	†	X	0	X	P	0	†	001				
RRs		†	†	X	0	X	P	0	†	011				
SLAs		†	†	X	0	X	P	0	†	100				
SRA s		†	†	X	0	X	P	0	†	101				
SRLs		†	†	X	0	X	P	0	†	111				
RLD	A	†	†	X	0	X	P	0	•	11 101 101 01 101 111	ED	2	5	18
RRD	A	†	†	X	0	X	P	0	•	11 101 101 01 100 111	ED	2	5	18

Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag is unknown,
 † = flag is affected according to the result of the operation.

BIT MANIPULATION GROUP

BIT	REGISTER ADDRESSING							(HL)	(IX+d)	(IY+d)
	A	B	C	D	E	H	L			
TEST 'BIT'	0 47	CB 40	CB 41	CB 42	CB 43	CB 44	CB 45	CB 46	DD CB d 46	FD CB d 46
	1 4F	CB 48	CB 49	CB 4A	CB 4B	CB 4C	CB 4D	CB 4E	DD CB d 4E	FD CB d 4E
	2 57	CB 50	CB 51	CB 52	CB 53	CB 54	CB 55	CB 56	DD CB d 56	FD CB d 56
	3 5F	CB 58	CB 59	CB 5A	CB 5B	CB 5C	CB 5D	CB 5E	DD CB d 5E	FD CB d 5E
	4 67	CB 60	CB 61	CB 62	CB 63	CB 64	CB 65	CB 66	DD CB d 66	FD CB d 66
	5 6F	CB 68	CB 69	CB 6A	CB 6B	CB 6C	CB 6D	CB 6E	DD CB d 6E	FD CB d 6E
	6 77	CB 70	CB 71	CB 72	CB 73	CB 74	CB 75	CB 76	DD CB d 76	FD CB d 76
	7 7F	CB 78	CB 79	CB 7A	CB 7B	CB 7C	CB 7D	CB 7E	DD CB d 7E	FD CB d 7E
RESET BIT 'RES'	0 87	CB 80	CB 81	CB 82	CB 83	CB 84	CB 85	CB 86	DD CB d 86	FD CB d 86
	1 8F	CB 88	CB 89	CB 8A	CB 8B	CB 8C	CB 8D	CB 8E	DD CB d 8E	FD CB d 8E
	2 97	CB 90	CB 91	CB 92	CB 93	CB 94	CB 95	CB 96	DD CB d 96	FD CB d 96
	3 9F	CB 98	CB 99	CB 9A	CB 9B	CB 9C	CB 9D	CB 9E	DD CB d 9E	FD CB d 9E
	4 A7	CB A0	CB A1	CB A2	CB A3	CB A4	CB A5	CB A6	DD CB d A6	FD CB d A6
	5 AF	CB A8	CB A9	CB AA	CB AB	CB AC	CB AD	CB AE	DD CB d AE	FD CB d AE
	6 B7	CB B0	CB B1	CB B2	CB B3	CB B4	CB B5	CB B6	DD CB d B6	FD CB d B6
	7 BF	CB B8	CB B9	CB BA	CB BB	CB BC	CB BD	CB BE	DD CB d BE	FD CB d BE
SET BIT 'SET'	0 C7	CB C0	CB C1	CB C2	CB C3	CB C4	CB C5	CB C6	DD CB d C6	FD CB d C6
	1 CF	CB C8	CB C9	CB CA	CB CC	CB CD	CB CE	CB CE	DD CB d CE	FD CB d CE
	2 D7	CB D0	CB D1	CB D2	CB D3	CB D4	CB D5	CB D6	DD CB d D6	FD CB d D6
	3 DF	CB D8	CB D9	CB DA	CB DB	CB DC	CB DD	CB DE	DD CB d DE	FD CB d DE
	4 E7	CB E0	CB E1	CB E2	CB E3	CB E4	CB E5	CB E6	DD CB d E6	FD CB d E6
	5 EF	CB E8	CB E9	CB EA	CB EB	CB EC	CB ED	CB EE	DD CB d EE	FD CB d EE
	6 F7	CB F0	CB F1	CB F2	CB F3	CB F4	CB F5	CB F6	DD CB d F6	FD CB d F6
	7 FF	CB F8	CB F9	CB FA	CB FB	CB FC	CB FD	CB FE	DD CB d FE	FD CB d FE

BIT SET, RESET AND TEST GROUP

Mnemonic	Symbolic Operation	Flags						Op-Code			No. of Bytes	No. of M Cycles	No. of T States	Comments	
		S	Z	H	P/V	N	C	76	543	210					
BIT b, r	$Z \leftarrow r_b$	X	†	X	1	X	X	0	•	11 001 011 01 b r	CB	2	2	8	r Reg. 000 B
BIT b, (HL)	$Z \leftarrow \overline{(\text{HL})}_b$	X	†	X	1	X	X	0	•	11 001 011 01 b 110	CB	2	3	12	001 C 010 D
BIT b, (IX+d) _b	$Z \leftarrow \overline{(IX+d)}_b$	X	†	X	1	X	X	0	•	11 011 101 11 001 011 - d - 01 b 110	DD CB	4	5	20	011 E 100 H 101 L 111 A b Bit Tested
BIT b, (IY+d) _b	$Z \leftarrow \overline{(IY+d)}_b$	X	†	X	1	X	X	0	•	11 111 101 11 001 011 - d - 01 b 110	FD CB	4	5	20	000 0 001 1 010 2 011 3 100 4 101 5 110 6 111 7
SET b, r	$r_b \leftarrow 1$	•	•	X	•	X	•	•	•	11 001 011 11 b r	CB	2	2	8	
SET b, (HL)	$(\text{HL})_b \leftarrow 1$	•	•	X	•	X	•	•	•	11 001 011 11 b 110	CB	2	4	15	
SET b, (IX+d)	$(IX+d)_b \leftarrow 1$	•	•	X	•	X	•	•	•	11 011 101 11 001 011 + d - 11 b 110	DD CB	4	6	23	
SET b, (IY+d)	$(IY+d)_b \leftarrow 1$	•	•	X	•	X	•	•	•	11 111 101 11 001 011 - d - 11 b 110	FD CB	4	6	23	
RES b, s	$s_b \leftarrow 0$ $s \equiv r, (\text{HL}), (IX+d), (IY+d)$	•	•	X	•	X	•	•	•	10				To form new Op- Code replace 11 of SET b, s with 10. Flags and time states for SET instruction	

Notes: The notation s_b indicates bit b (0 to 7) or location s.

Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag is unknown,
† = flag is affected according to the result of the operation.

JUMP GROUP

CONDITION

			UN- COND.	CARRY	NON CARRY	ZERO	NON ZERO	PARITY EVEN	PARITY ODD	SIGN NEG	SIGN POS.	REG B/D
JUMP 'JP'	IMMED. EXT.	nn	C3 n n	DA n n	D2 n n	CA n n	C2 n n	EA n n	E2 n n	FA n n	F2 n n	
JUMP 'JR'	RELATIVE	PC - e	18. e 2	38 e 2	30 e 2	28 e 2	20 e 2					
JUMP 'JP'		(HL)	E9									
JUMP 'JP'	REG. INDIR.	(IX)	DD E9									
JUMP 'JP'		(IY)	FD E9									
DECREMENT B, JUMP IF NON ZERO 'DJNZ'	RELATIVE	PC - e										10 e 2

JUMP GROUP

Mnemonic	Symbolic Operation	Flags						Op-Code			No. of Bytes	No. of M Cycles	No. of T States	Comments	
		S	Z	H	P/V	N	C	76 543 210	Hex						
JP nn	PC + nn	•	•	X	•	X	•	•	•	11 000 011 - n + - n + - n + - n +	C3	3	3	10	
JP cc, nn	If condition cc is true PC + nn, otherwise continue	•	•	X	•	X	•	•	•	11 cc 010 - n + - n +		3	3	10	cc Condition 000 NZ non zero 001 Z zero 010 NC non carry 011 C carry 100 PO parity odd 101 PE parity even 110 P sign positive
JR e	PC + PC + e	•	•	X	•	X	•	•	•	00 011 000 - e-2 -	18	2	3	12	111 M sign negative
JR C, e	If C = 0, continue If C = 1, PC + PC+e	•	•	X	•	X	•	•	•	00 111 000 - e-2 -	38	2	2	7	If condition not met
JR NC, e	If C = 1, continue If C = 0, PC + PC+e	•	•	X	•	X	•	•	•	00 110 000 - e-2 -	30	2	2	7	If condition not met
JR Z, e	If Z = 0, continue If Z = 1, PC + PC+e	•	•	X	•	X	•	•	•	00 101 000 - e-2 -	28	2	2	7	If condition not met
JR NZ, e	If Z = 1, continue If Z = 0, PC + PC+e	•	•	X	•	X	•	•	•	00 100 000 - e-2 -	20	2	2	7	If condition not met
JP (HL)	PC - HL	•	•	X	•	X	•	•	•	11 101 001	E9	1	1	4	
JP (IX)	PC - IX	•	•	X	•	X	•	•	•	11 011 101 11 101 001	DD	2	2	8	
JP (IY)	PC - IY	•	•	X	•	X	•	•	•	11 111 101 11 101 001	E9	2	2	8	
DJNZ, e	B - B-1 If B = 0, continue If B ≠ 0, PC - PC+e	•	•	X	•	X	•	•	•	00 010 000 - e-2 -	10	2	2	8	If B = 0
												2	3	13	If B ≠ 0

Notes: e represents the extension in the relative addressing mode.

e is a signed two's complement number in the range <128, 129>

e-2 in the op-code provides an effective address of pc+e as PC is incremented by 2 prior to the addition of e.

Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag unknown.
† = flag is affected according to the result of the operation.

CALL AND RETURN GROUP

CONDITION

			UN- COND.	CARRY	NON CARRY	ZERO	NON ZERO	PARITY EVEN	PARITY ODD	SIGN NEG.	SIGN POS.	REG. B ≠ 0
'CALL'	IMMED. EXT.	nn	CD n n	DC n n	D4 n n	CC n n	C4 n n	EC n n	E4 n n	FC n n	F4 n n	
RETURN 'RET'	REGISTER INDIR.	(SP) (SP+1)	C9	D8	D0	C8	C0	E8	E0	F8	F0	
RETURN FROM INT 'RETI'	REGISTER INDIR.	(SP) (SP+1)	ED 4D									
RETURN FROM NON MASKABLE INT 'RETN'	REGISTER INDIR.	(SP) (SP+1)	ED 45									

NOTE - CERTAIN
FLAGS HAVE MORE
THAN ONE PURPOSE.
REFER TO Z80-CPU
TECHNICAL MANUAL
FOR DETAILS.

RESTART GROUP

C A L L A D D R E S S	OP CODE		'RST 0' 'RST 8' 'RST 16' 'RST 24' 'RST 32' 'RST 40' 'RST 48' 'RST 56'
	0000 _H	C7	
	0008 _H	CF	
	0010 _H	D7	
	0018 _H	DF	
	0020 _H	E7	
	0028 _H	EF	
	0030 _H	F7	
	0038 _H	FF	

CALL AND RETURN GROUP

Mnemonic	Symbolic Operation	Flags						Op-Code			No. of Bytes	No. of M Cycles	No. of T States	Comments	
		S	Z	H	P/V	N	C	76	543	210					
CALL nn	(SP-1) - PC _H (SP-2) - PC _L PC - nn	•	•	X	•	X	•	•	11	001	101	CD	3	5	17
CALL cc, nn	If condition cc is false continue, otherwise same as CALL nn	•	•	X	•	X	•	•	11	cc	100		3	3	10
RET	PC _L - (SP) PC _H - (SP+1)	•	•	X	•	X	•	•	11	001	001	C9	1	3	10
RET cc	If condition cc is false continue, otherwise same as RET	•	•	X	•	X	•	•	11	cc	000		1	1	5
RETI	Return from interrupt	•	•	X	•	X	•	•	11	101	101	ED	2	4	14
RETN ¹	Return from non maskable interrupt	•	•	X	•	X	•	•	01	001	101	4D	2	4	14
									01	000	101	45			
RST p	(SP-1) - PC _H (SP-2) - PC _L PC _H - 0 PC _L - p	•	•	X	•	X	•	•	11	t	111		1	3	11
									t		p				
									000		00H				
									001		08H				
									010		10H				
									011		18H				
									100		20H				
									101		28H				
									110		30H				
									111		38H				

¹ RETN loads IFF₂ ~ IFF₁

 Flag Notation: • = flag not affected, 0 = flag reset, 1 = flag set, X = flag is unknown,
 † = flag is affected according to the result of the operation.

Z80 – CPU INTERRUPT STRUCTURE

MASKABLE (INT)

Mode 0


Place instruction onto Data Bus during $\overline{\text{INTA}} = \overline{\text{MI}} + \overline{\text{IORQ}}$ like 8080A

Mode 1

Restart to 38H or 5610 ('RST 56')

Mode 2

Used by Z80 Peripherals

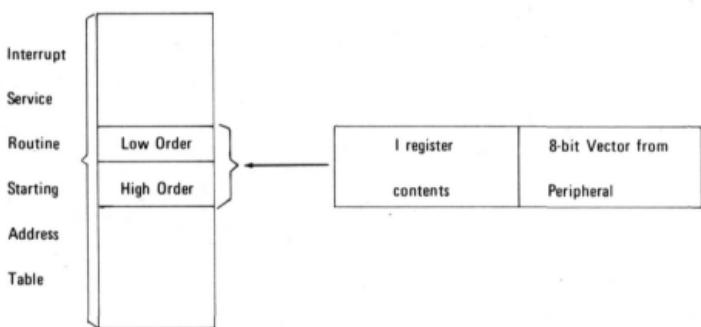

NON MASKABLE (NMI)

Restart to 66H or 10210

INTERRUPT ENABLE/DISABLE FLIP-FLOPS

Action	IFF ₁	IFF ₂	
CPU Reset	0	0	
DI	0	0	
EI	1	1	
LD A, I	*	*	IFF ₂ + Parity flag
LD A, R	*	*	IFF ₂ + Parity flag
Accept NMI	0	*	
RETN	IFF ₂	*	IFF ₂ + IFF ₁
Accept INT	0	0	
RETI	*	*	

"*" indicates no change

PIO PROGRAMMING SUMMARY

REGISTER SELECTION

SELECT LINES		REGISTER SELECTED
C/D	B/A	
0	0	A Data
0	1	B Data
1	0	A Control
1	1	B Control

LOAD INTERRUPT VECTOR

D7								DO
V7	V6	V5	V4	V3	V2	V1	0	

Control Register

SET OPERATING MODE

D7								DO
M1	M0	X	X	1	1	1	1	
<u>Mode Number</u>								
0	0	0						Output
1	0	1						Input
2	1	0						Bidirectional
3	1	1						Bit Control

If Mode 3 selected, the next control word to the PIO is

D7								DO
I/O ₇	I/O ₆	I/O ₅	I/O ₄	I/O ₃	I/O ₂	I/O ₁	I/O ₀	

I/O = 1 Sets bit to Input
I/O = 0 Sets bit to Output

SET INTERRUPT CONTROL

D7								DO
Int Enable	AND/OR	High/Low	Mask Follows	0	1	1	1	

Control Register

In Mode 3 if Mask follows = 1, the next control word to the PIO is

D7								DO
MB ₇	MB ₆	MB ₅	MB ₄	MB ₃	MB ₂	MB ₁	MB ₀	

MB = 0 Monitor the bit

MB = 1 Mask the bit

ENABLE / DISABLE INTERRUPTS

D7								DO
Int Enable	X	X	X	0	0	1	1	

Control Register

SIO PROGRAMMING SUMMARY (Cont'd.)

WRITE REGISTERS


WRITE REGISTER 0

D7	D6	D5	D4	D3	D2	D1	D0	
						0	0	0
						0	0	1
						0	1	0
						0	1	1
						1	0	0
						1	0	1
						1	1	0
						1	1	1
0	0	0	0					NULL CODE
0	0	0	1					SEND ABORT (SDLC)
0	1	0	0					RESET EXT. STATUS INTERRUPTS
0	1	1	1					CHANNEL RESET
1	0	0	0					RESET RxINT ON FIRST CHARACTER
1	0	1	0					RESET RxINT PENDING
1	1	0	0					ERROR RESET
1	1	1	1					RETURN FROM INT (CH-A-ONLY)
0	0							NULL CODE
0	1							RESET Rx CRC CHECKER
1	0							RESET Tx CRC GENERATOR
1	1							RESET CRC/SYNCs SENT/SENDING LATCH

WRITE REGISTER 1

D7	D6	D5	D4	D3	D2	D1	D0	
								EXT. INT ENABLE
							1	Tx INT ENABLE
							0	STATUS AFFECTS VECTOR
							0	Rx INT ENABLE
							0	Rx INT ON FIRST CHARACTER
							1	ONLY ERROR
							1	INT ON ALL Rx CHARACTERS (PARITY AFFECTS VECTOR)
							1	INT ON ALL Rx CHARACTERS (PARITY DOES NOT AFFECT VECTOR)
								WAIT/READY ON RT
								WAIT FN/READY FN
								WAIT/READY ENABLE

WRITE REGISTER 2*

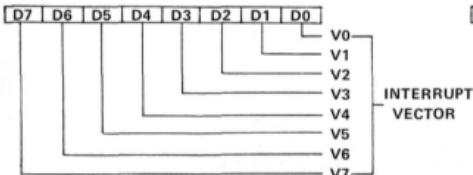

WRITE REGISTER 3

D7	D6	D5	D4	D3	D2	D1	D0	
								Rx ENABLE
							1	SYNC CHARACTER LOAD INHIBIT
							0	ADDRESS SEARCH
							1	*MODE (SDLC)
							0	Rx CRC ENABLE
							1	ENTER HUNT MODE
							0	AUTO ENABLES
							1	
0	0						0	Rx 5 BITS/CHARACTER
0	1						0	Rx 7 BITS/CHARACTER
1	0						0	Rx 6 BITS/CHARACTER
1	1						1	Rx 8 BITS/CHARACTER

*Can Only Be Written By Channel B

SIO PROGRAMMING SUMMARY (Cont'd.)

WRITE REGISTER 4

D7	D6	D5	D4	D3	D2	D1	D0	
								PARITY ENABLE
								PARITY EVEN/ODD
				0	0			SYNC MODES ENABLE
				0	1			1 STOP BIT/CHARACTER
				1	0			1½ STOP BITS/CHARACTER
				1	1			2 STOP BITS/CHARACTER
				0	0			8 BITS SYNC CHARACTER
				0	1			16 BIT SYNC CHARACTER
				1	0			SDLC MODE (01111110 SYNC FLAG)
				1	1			EXTERNAL SYNC MODE
0	0							X1 CLOCK MODE
0	1							X16 CLOCK MODE
1	0							X32 CLOCK MODE
1	1							X64 CLOCK MODE

WRITE REGISTER 5

D7	D6	D5	D4	D3	D2	D1	D0	
								Tx CRC ENABLE
								RTS
								SDL/CRC 16
								Tx ENABLE
								SEND BREAK
0	0							Tx 5 BITS (OR LESS) CHARACTER
0	1							Tx 6 BITS/CHARACTER
1	0							Tx 7 BITS/CHARACTER
1	1							Tx 8 BITS/CHARACTER
								DTR

WRITE REGISTER 6

D7	D6	D5	D4	D3	D2	D1	D0	
								SYNC BIT 0
								SYNC BIT 1
								SYNC BIT 2
								SYNC BIT 3
								SYNC BIT 4
								SYNC BIT 5
								SYNC BIT 6
								SYNC BIT 7

* ALSO SDLC ADDRESS FIELD

WRITE REGISTER 7

D7	D6	D5	D4	D3	D2	D1	D0	
								SYNC BIT 8
								SYNC BIT 9
								SYNC BIT 10
								SYNC BIT 11
								SYNC BIT 12
								SYNC BIT 13
								SYNC BIT 14
								SYNC BIT 15

* FOR SDLC IT MUST BE PROGRAMMED
TO "01111110" FOR FLAG RECOGNITION

STATUS AFFECTS VECTOR (D2) (FROM WRITE REG 1)

If this mode is selected, the vector returned from an interrupt acknowledge cycle will be variable according to the following:

	V3	V2	V1	
Ch B	0	0	0	Ch B Transmit Buffer Empty
	0	0	1	Ch B External/Status Change
	0	1	0	Ch B Receive Character Available
	0	1	1	Ch B Special Receive Condition
Ch A	1	0	0	Ch A Transmit Buffer Empty
	1	0	1	Ch A External/Status Change
	1	1	0	Ch A Receive Character Available
	1	1	1	Ch A Special Receive Condition

If this bit is 0, the fixed vector programmed in the vector register is returned.

CTC PROGRAMMING SUMMARY

REGISTER SELECTION

SELECT LINES		CHANNEL SELECTED	PRIORITY
CS ₁	CS ₀		
0	0	0	Highest
0	1	1	
* 1	0	2	
1	1	3	Lowest

READ = DOWN COUNTER

WRITE = CONTROL REGISTER

LOAD INTERRUPT VECTOR

CS₀ = CS₁ = 0

D7	V ₇	V ₆	V ₅	V ₄	V ₃	X	X	D0

XX is the binary equivalent of interrupting channel number

Control Register

SET OPERATING MODE

Timer Mode only								
D7	Interrupt Enable	Mode	Range	Slope	Trigger	Load Time Constant	Reset	D0
	Counter/Timer	256/16	+/-	On/Off				

If Load Time Constant = 1 the next control word is the Time Constant:

D7	TC ₇	TC ₆	TC ₅	TC ₄	TC ₃	TC ₂	TC ₁	TC ₀	D0

CTC Channel interrupts when 01H is decremented to 00H

Time Content

Decimal counts to interrupt

01H	1
.	.
.	.
FFH	255
00H	256


SIO PROGRAMMING SUMMARY

CHANNEL SELECTION


C/D	B/A	FUNCTION
0	0	Channel A Data
0	1	Channel B Data
1	0	Channel A Commands/Status
1	1	Channel B Commands/Status

READ REGISTERS

READ REGISTER 0

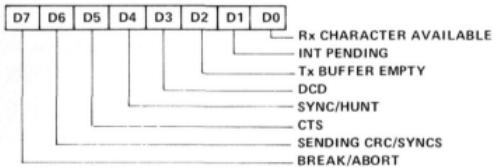


READ REGISTER 2*

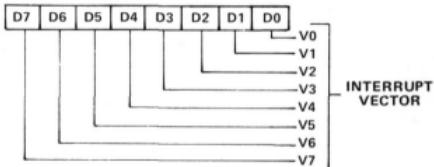

*Can Only Be Read By Channel B

READ REGISTER 1

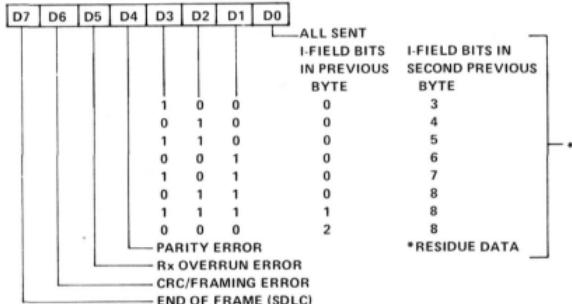

NOTES

ASCII CHARACTER SET (7-BIT CODE)

		MSD	0	1	2	3	4	5	6	7
LSD		000	001	010	011	100	101	110	111	
0	0000	NUL	DLE	SP	0	@	P	‘	p	
1	0001	SOH	DC1	!	1	A	Q	a	q	
2	0010	STX	DC2	“	2	B	R	b	r	
3	0011	ETX	DC3	#	3	C	S	c	s	
4	0100	EOT	DC4	\$	4	D	T	d	t	
5	0101	ENQ	NAK	%	5	E	U	e	u	
6	0110	ACK	SYN	&	6	F	V	f	v	
7	0111	BEL	ETB	’	7	G	W	g	w	
8	1000	BS	CAN	(8	H	X	h	x	
9	1001	HT	EM)	9	I	Y	i	y	
A	1010	LF	SUB	*	:	J	Z	j	z	
B	1011	VT	ESC	+	;	K	[k		
C	1100	FF	FS	’	<	L	\	l		
D	1101	CR	GS	-	=	M]	m		
E	1110	SO	RS	•	>	N	†	n	~	
F	1111	SI	VS	/	?	O	–	o	DEL	

Field Support Offices

EAST

* 500 Office Center
Fort Washington Ind. Park
Fort Washington, Pennsylvania 19034
215/628-9050

* 60 Turner Street
Waltham, Massachusetts 02154
617/899-9107

* Exchange Bank Building
1111 North Westshore Blvd.
Suite 414
Tampa, Florida 33607
813/678-1304

* 34 West Putnam
2nd Floor
Greenwich, Conn. 06830
203/622-0955

CENTRAL

* 701 East Irving Park Blvd.
Suite 206
Roselle, Illinois 60172
312/529-3993

5100 Edina Ind. Blvd.
Edina, Minnesota 55435
612/835-7303

* 228 Byers Road
Suite 105
Miamisburg, Ohio 45342
513/866-3405

WEST

* 17870 Skypark Circle
Suite 107
Irvine, California 92714
714/549-0397

13300 Branchview Lane
Farmers Branch, Texas 75234
214/243-1017

* 2025 Gateway Place
Suite 268
San Jose, California 95011
408/287-5081

8828 North Central Avenue
Suite 201
Phoenix, Arizona 85020
602/997-7573

* Offices that offer Field Application Engineering assistance.

Technical data is also available from your local MOSTEK
representative or distributor. Please call!!!

MOSTEK®
Z80-F8 Covering the full
3870 spectrum of
microcomputer
applications.

1215 W. Crosby Rd. • Carrollton, Texas 75006 • 214/242-0444
In Europe, contact: MOSTEK GmbH, Talstrasse 172
D 7024 Filderstadt-1, W. Germany • Tele: (0711) 701096

Mostek reserves the right to make changes in specifications at any time and without notice. The information furnished by Mostek in this publication is believed to be accurate and reliable. However, no responsibility is assumed by Mostek for its use; nor for any infringements of patents or other rights of third parties resulting from its use. No license is granted under any patents or patent rights of Mostek.

PRINTED IN USA February 1978
Publication No. MK78516

Copyright 1978 by Mostek Corporation
All rights reserved